# 3KESS1AFPW <

### Corcom KES

TE Internal #: 1-1609966-1 3-Phase Filters, 3A Current Rating, .250" FASTON Input, .250" FASTON Output, WYE (4 wire + ground), Operating Voltage 440 VAC, Chassis, Corcom KES

#### View on TE.com >

EMI & EMC Solutions > EMI Filters > Power Line Filters > 3-Phase Filters



Current Rating: **3**A Input Termination Type: **.250" FASTON** Output Termination Type: **.250" FASTON** Wiring Configuration: **WYE (4 wire + ground)** Operating Voltage: **440 VAC** 

## Features



## **Product Type Features**

Filtering Requirements	Filtered			
Input Termination Type	.250" FASTON			
Output Termination Type	.250" FASTON			
Configuration Features				
Wiring Configuration	WYE (4 wire + ground)			
Electrical Characteristics				
Leakage Current (Max) (230VAC, 50Hz)	3			
Current Rating	3 A			
Operating Voltage	440 VAC			
Mechanical Attachment				
Product Mount Type	Chassis			
Usage Conditions				
Operating Temperature Range	-25 – 85 °C			

### 3KESS1AFPW

3-Phase Filters, 3A Current Rating, .250" FASTON Input, .250" FASTON Output, WYE (4 wire + ground), Operating Voltage 440 VAC, Chassis, Corcom KES



## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	

### Solder Process Capability

Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




# Also in the Series | Corcom KES

## 3KESS1AFPW

3-Phase Filters, 3A Current Rating, .250" FASTON Input, .250" FASTON Output, WYE (4 wire + ground), Operating Voltage 440 VAC, Chassis, Corcom KES



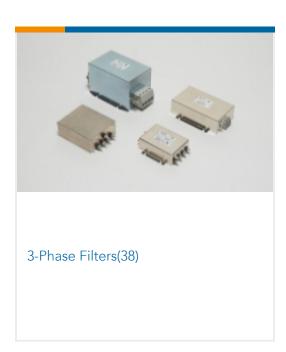

# Customers Also Bought



<b>REC FASTON SERIES 635 PIDG</b>	5P STD-TIMER GEH	MULTIF.ASSY MK2 5P,AR	5 POS. FASTIN-FASTON CONN. TAB
			HOUSING R



## Documents

Product Drawings KES 3A 1S SPADE WYE 440VAC

English

### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_1-1609966-1\_B.3d\_igs.zip

English

Customer View Model

**C** For support call+1 800 522 6752

## 3KESS1AFPW

3-Phase Filters, 3A Current Rating, .250" FASTON Input, .250" FASTON Output, WYE (4 wire + ground), Operating Voltage 440 VAC, Chassis, Corcom KES



ENG\_CVM\_CVM\_1-1609966-1\_B.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1609966-1\_B.2d\_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages KES SERIES

English