




Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Vertical Mount

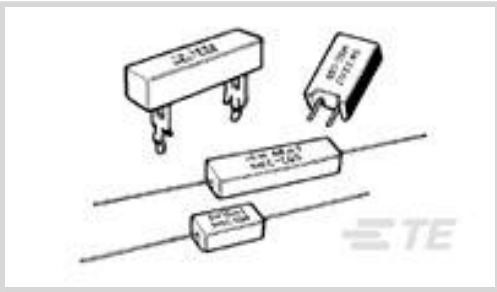

Resistor Type: **Power Resistor**

Passive Component Dimensions: **36 x 10 x 10 mm**

Number of Terminations: **2**

Packaging Method: **Loose Piece - Box**

Passive Component Tolerance: **5 %**

[All Wirewound Resistor: Vertical Mount \(202\)](#)

Features

Product Type Features

|               |                         |
|---------------|-------------------------|
| Product Type  | Fixed Resistor          |
| Resistor Type | Power Resistor          |
| Element Type  | Metal Oxide, Wire Wound |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Resistors | 1 |
|---------------------|---|

Electrical Characteristics

|                             |                           |
|-----------------------------|---------------------------|
| Passive Component Tolerance | 5 %                       |
| Resistance Class            | 1k $\Omega$ – 1M $\Omega$ |
| Resistance Value            | 5K $\Omega$               |
| Power Rating                | 7 W                       |

Body Features

|                             |                         |
|-----------------------------|-------------------------|
| Passive Component Lead Type | Radial-Leaded Pluggable |
|-----------------------------|-------------------------|

Termination Features

|                                             |       |
|---------------------------------------------|-------|
| Number of Terminations                      | 2     |
| Passive Component Termination Material Type | Steel |

Dimensions

|  |  |
|--|--|
|  |  |
|--|--|



|                              |                 |
|------------------------------|-----------------|
| Passive Component Dimensions | 36 x 10 x 10 mm |
|------------------------------|-----------------|

Usage Conditions

|                             |                                   |
|-----------------------------|-----------------------------------|
| Operating Temperature Range | -55 – 250 $^{\circ}\text{C}$      |
| Temperature Coefficient     | $\pm 300$ ppm/ $^{\circ}\text{C}$ |

Packaging Features

|                  |                   |
|------------------|-------------------|
| Packaging Method | Loose Piece - Box |
|------------------|-------------------|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUL 2021 (219)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                            |
| Solder Process Capability                     | Wave solder capable to 265 $^{\circ}\text{C}$                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



Also in the Series | CGS SQ



Customers Also Bought

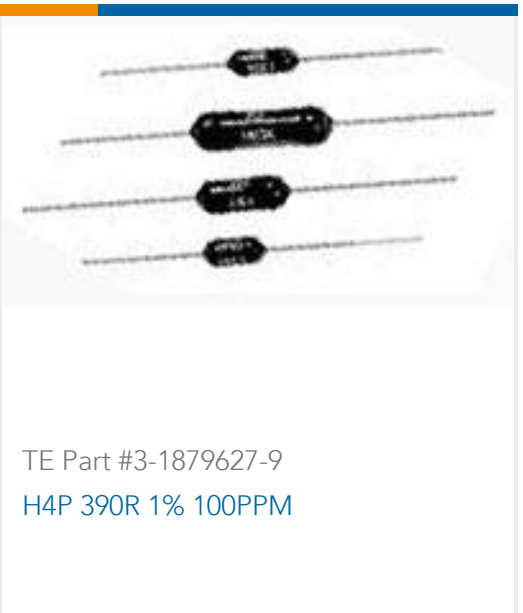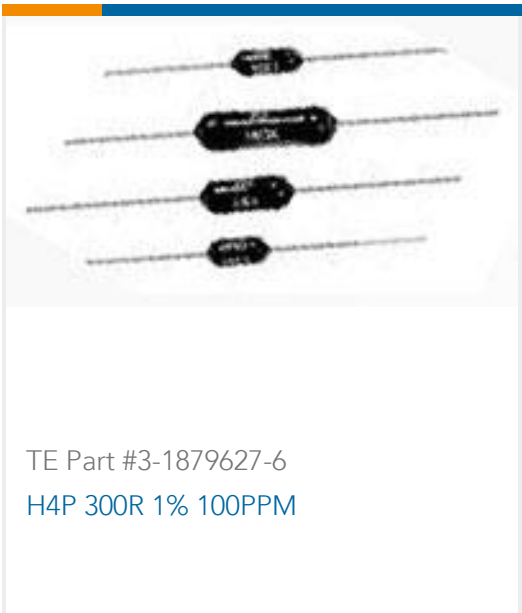

Documents

Product Drawings  
SQZ7 5K0 5% (METAL FILM)

English

CAD Files  
3D PDF

3D



Customer View Model

[ENG\\_CVM\\_CVM\\_1-1623803-1\\_BA.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1623803-1\\_BA.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1623803-1\\_BA.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[4-1773460-6\\_RESISTIVE\\_SOLUTIONS\\_RAIL](#)

English

[1309350\\_PASSIVE\\_COMPONENT](#)

English

[High Power Resistors - Type SQ Series](#)

English

[8-1773459-4\\_POWER\\_FILTERING\\_AND\\_RESISTIVE\\_SOLUTIONS\\_FOR\\_ELEVATORS\\_AND\\_ESCALATORS](#)

English