

1-163084-0 ✓ ACTIVE

AMP | AMP Type III+


TE Internal #: 1-163084-0

Power Contacts, Contact, Gold, 18 – 15 AWG Wire Size, .75 – 1.5 mm<sup>2</sup> Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type III+

[View on TE.com >](#)



Connectors > Power Connectors > Power Contacts > Pin and Socket Contacts, Type III, LP EMEA

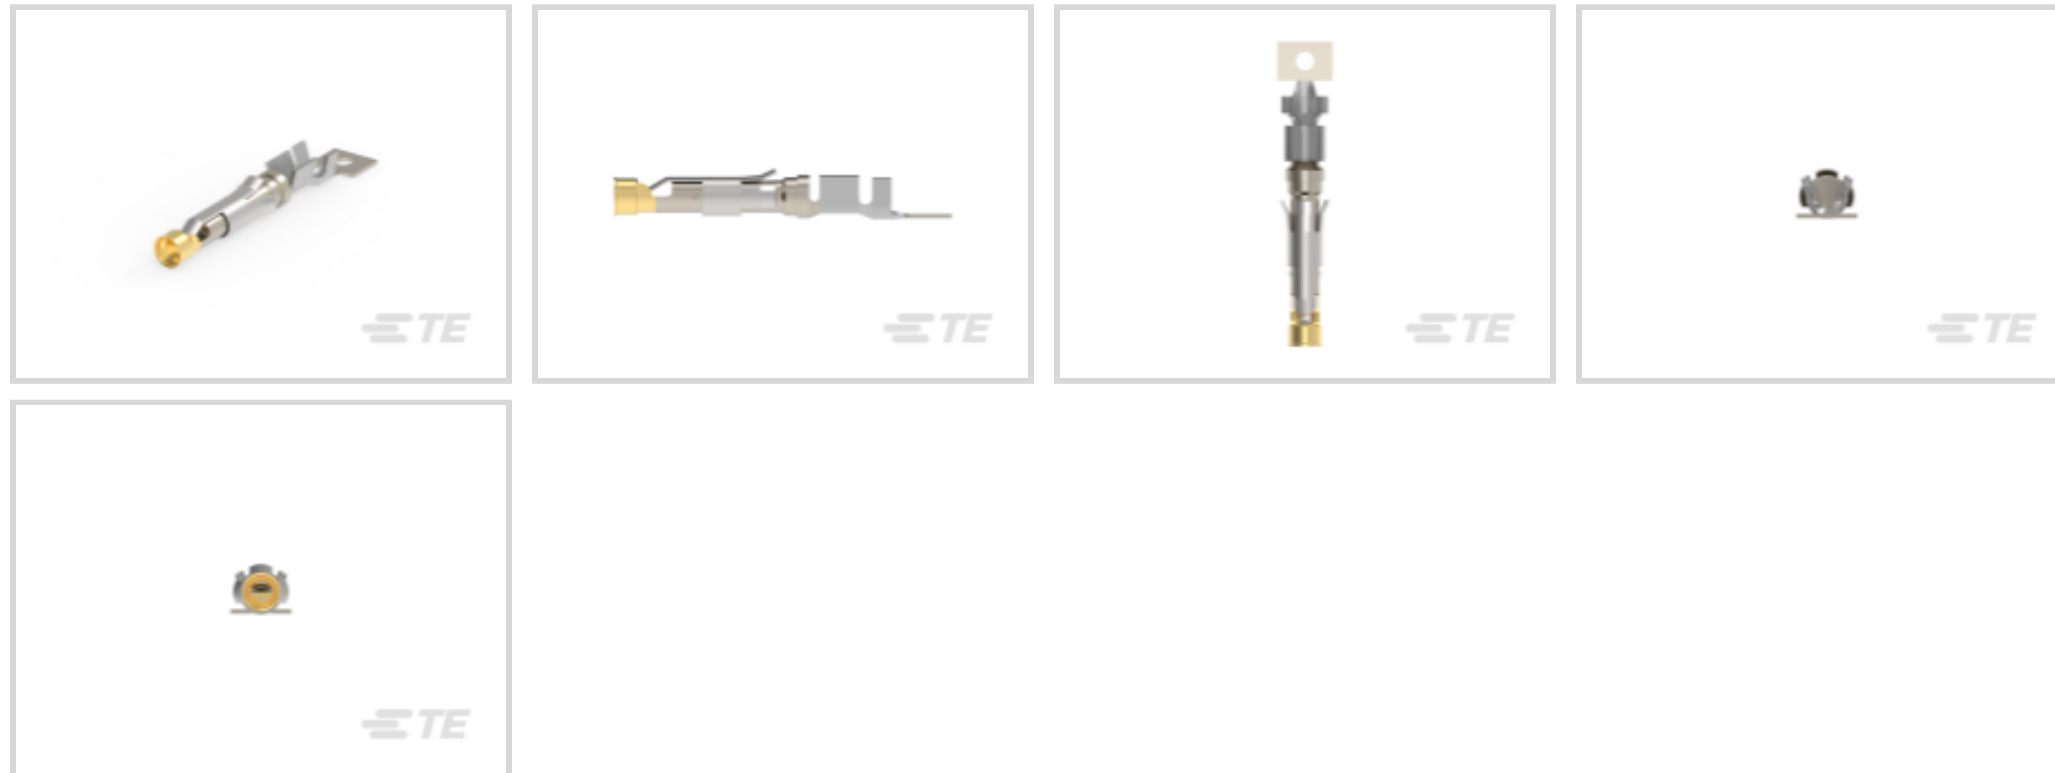

Power Contact Type: **Contact**

Contact Mating Area Plating Material: **Gold**

Wire Size: **.75 – 1.5 mm<sup>2</sup>**

Connector & Contact Terminates To: **Wire & Cable**

[All Pin and Socket Contacts, Type III, LP EMEA \(27\)](#)

## Features

### Product Type Features

|                                    |              |
|------------------------------------|--------------|
| Compatible With Discrete Wire Type | Stranded     |
| Power Contact Type                 | Contact      |
| Connector & Contact Terminates To  | Wire & Cable |

### Contact Features

|  |                  |
|--|------------------|
| Contact Size                                   | Size 16          |
| Contact Mating Area Plating Material           | Gold             |
| Contact Current Rating (Max)                   | 13 A             |
| Contact Type                                   | Socket           |
| Contact Retention Within Housing               | With             |
| Mating Pin Diameter                            | 1.57 mm[.062 in] |
| Contact Base Material                          | Brass            |
| Contact Mating Area Plating Material Thickness | .76 μm[30 μin]   |
| Contact Mating Area Plating Material Finish    | Bright           |

|   |                 |
|---|-----------------|
| Wire Contact Termination Area Plating Thickness | 1.02 μm[40 μin] |
|---|-----------------|

|  |            |
|--|------------|
| Wire Contact Termination Area Plating Material | Gold Flash |
|--|------------|

|   |        |
|---|--------|
| Wire Contact Termination Area Plating Material Finish | Bright |
|---|--------|

|                     |          |
|---------------------|----------|
| Contact Orientation | Straight |
|---------------------|----------|

|                               |        |
|-------------------------------|--------|
| Contact Underplating Material | Nickel |
|-------------------------------|--------|

|   |                |
|---|----------------|
| Contact Underplating Material Thickness | .76 μm[30 μin] |
|---|----------------|

### Termination Features

|                                    |       |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
|------------------------------------|-------|

### Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

### Dimensions

|           |                           |
|-----------|---------------------------|
| Wire Size | .75 – 1.5 mm <sup>2</sup> |
|-----------|---------------------------|

|                                      |                                |
|--------------------------------------|--------------------------------|
| Compatible Insulation Diameter Range | 2.01 – 2.49 mm[.078 – .098 in] |
|--------------------------------------|--------------------------------|

### Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 150 °C[-67 – 302 °F] |
|-----------------------------|----------------------------|

### Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

### Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Quantity | 200 |
|--------------------|-----|

|                  |     |
|------------------|-----|
| Packaging Method | Bag |
|------------------|-----|

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|                              |           |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|

|                             |           |
|-----------------------------|-----------|
| EU ELV Directive 2000/53/EC | Compliant |
|-----------------------------|-----------|

|   |   |
|---|---|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
|---|---|

|  |   |
|--|---|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
|--|---|

|                 |   |
|-----------------|---|
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
|-----------------|---|

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 58495-2  
PROCRIMPER DIE ASSY MULTIMATE



TE Part # 91505-1  
CCII TYPE III+ 24-16 ASSY



TE Part # 200893-2  
INSERTION TOOL CONT



TE Part # 58495-1  
PRO CRIMPER ASSY MULTIMATE



TE Part # 91523-1  
CCII TYPE III+ PIN SKT 24-16 ASSY



TE Part # 305183  
EXTRACT TOOL TYPE 2 20-16



TE Part # 539972-1  
EXTRACTION TOOL



TE Part # 2063487-1  
SDE TYPE III+ 0.2-2.5mm<sup>2</sup> ASSY



TE Part # 2063487-2  
SDE TYPE III+ 0.2-2.5mm<sup>2</sup> DIE SET



TE Part # 539668-2  
MATRIZE TYPE 3+



TE Part # 169422-1  
MINI CERTI-LOK III+

Also in the Series | **AMP Type III+**




Insertion & Extraction Tools(4)



Power Contacts(409)


### Customers Also Bought

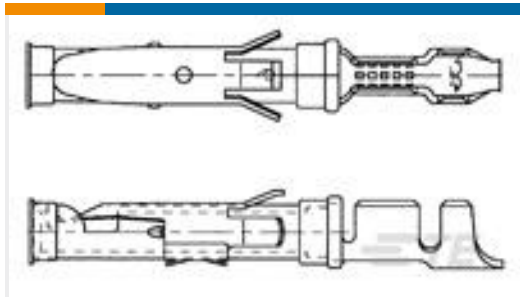


TE Part #163092-2  
.062 DIA SOCKET ASSY 3+ (LP)



TE Part #3-1879233-3  
SMW5 2R2 5%

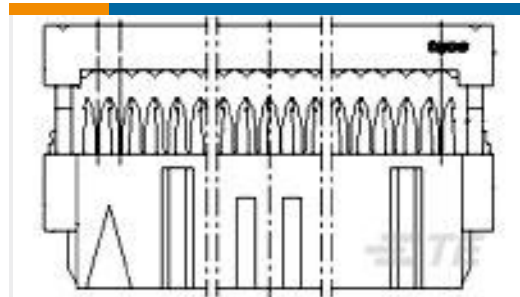


TE Part #2-215882-0  
20 WAY GREY MK II RECP

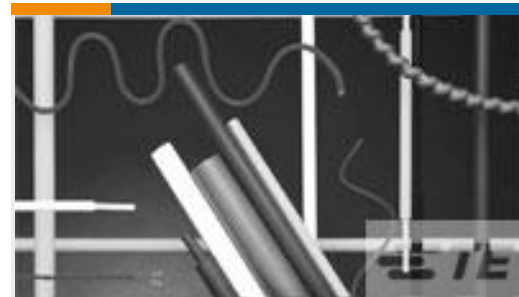


TE Part #5069734006  
CGPT-9.5/4.8-X-SP




TE Part #1718165-1  
MINI MAG MATE CONTACT (LEAF SPRING)



TE Part #1825219-4  
TT11DGRA104



TE Part #5-1481303-0  
CONTACT GUIDE



TE Part #5-1481303-1  
ANVIL - WIRE



TE Part #1106408-2  
HIP-K.3/4.STO.1.M16.G

### Documents

#### Product Drawings

SPEC. PLATED

English

SPEC. PLATED

English

#### CAD Files

3D PDF

3D



### Customer View Model

[ENG\\_CVM\\_CVM\\_1-163084-0\\_AY.2d\\_dxf.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_1-163084-0\\_AY.3d\\_igs.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_1-163084-0\\_AY.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Product Specifications

[Product Specification](#)

English

## Product Environmental Compliance

[Product Compliance Document](#)

English

[Product Compliance Document](#)

English