

AMP | MCON Interconnection System

TE Internal #: 1-1718645-1 Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 4

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

Features

Product Type Features

Mixed & Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire	
Connector & Housing Type	Housing for Female Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	4	
Number of Rows	1	
Electrical Characteristics		
Operating Voltage	12 VDC	
Nominal Voltage Architecture	12 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Black	
Connector & Keying Code	A	



Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Contact Features

Contact Size	1.2mm
Contact Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]
Contact Current Rating (Max)	25 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Connector Height	16.5 mm[.65 in]
Product Width	26.5 mm[1.043 in]
Product Length	24.7 mm[.972 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Degree of Protection	IP6K9K
Packaging Features	
Packaging Quantity	1500
Packaging Method	Box
Other	
Serviceable	Yes

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Connector Position Assurance Capable

Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | MCON Interconnection System

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



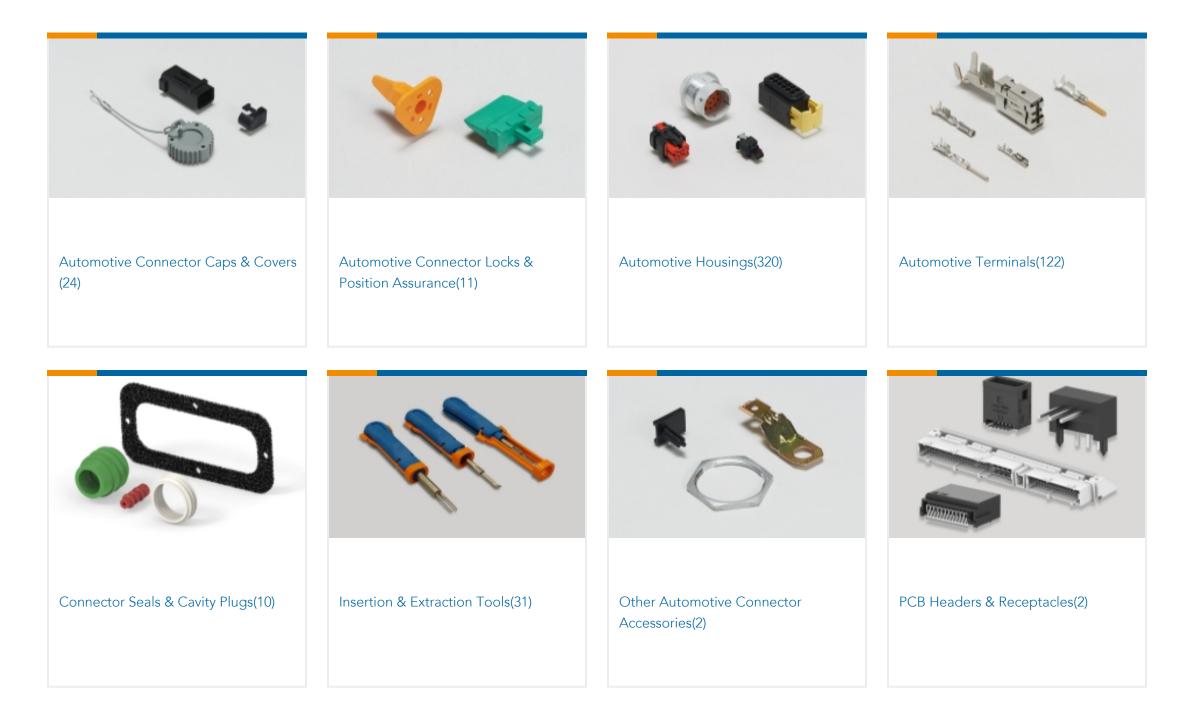

Customers Also Bought



Signal Header	MCON 1.2 LL REC SWS SN	18POS, MIXED,REC HSG,ASSY, SEALED	4pos MQS .63 header 90deg SMD	
T				
TE Part #1-1452920-1 COVER ASSY FOR 30 POS EPB CONN	TE Part #1-2272975-3 6 Pos. Sealed MCON 1.2 Connect	TE Part #1746941-1 SEALED EFI ECU 126P PLUG WIRE COVER	TE Part #2133708-1 PIN HEADER 80P WITH PIN GUIDE	

TE Part #2255132-1 STUFFER, WIRE INSERT

Documents

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Product Drawings 4POS, MCON 1.2 LL REC SEALED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1718645-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1718645-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1718645-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MCON Interconnection System

English

Product Specifications Application Specification

English