


### AMP | Multilock Connector System

TE Internal #: 1-173850-1 Housing for Female Terminals, Wire-to-Wire, 8 Position, .217 in / . 138 in [5.5 mm / 3.5 mm] Centerline, Natural, Signal, Multilock Connector System

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > MULTILOCK, CONNECTOR HOUSING

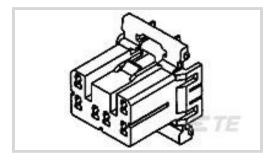

Connector System: Wire-to-Wire

Number of Positions: 8

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 3.5 mm, 5.5 mm [ .138 in, .217 in ]

Sealable: No

### All MULTILOCK, CONNECTOR HOUSING (567)

## Features

## Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector System	Wire-to-Wire			
Connector & Housing Type	Housing for Female Terminals			
Sealable	No			
Primary Locking Feature	Integrated in Housing			
Configuration Features				
Number of Positions	8			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	12 VDC			
Nominal Voltage Architecture	12 V			
Body Features				
Cable Exit Angle	180°			
Primary Product Color	Natural			
Contact Features				

**C** For support call+1 800 522 6752

09/20/2023 07:15PM | Page 1

Housing for Female Terminals, Wire-to-Wire, 8 Position, .217 in / .138 in [5.5 mm / 3.5 mm] Centerline, Natural, Signal, Multilock Connector System



Contact Size	1.8mm			
Contact Type	Receptacle			
Mating Tab Width	1.8 mm[.071 in]			
Mechanical Attachment				
Terminal Position Assurance	Yes			
Strain Relief	Without			
Mating Alignment Type	Polarized			
Mating Alignment	With Cable Mount (Free-Hanging)			
Connector Mounting Type				
Housing Features				
Housing Material	PBT			
Centerline (Pitch)	3.5 mm, 5.5 mm[.138 in][.217 in]			
Dimensions				
Connector Height	26.05 mm[1.026 in]			
Product Width	24.8 mm[.976 in]			
Product Length	21.6 mm[.85 in]			
Row-to-Row Spacing	5.5 mm, 6.3 mm[.217 in][.248 in]			

# Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]			
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]			
Operation/Application				
Circuit Application	Signal			
Industry Standards				
UL Flammability Rating	UL 94HB			
Packaging Features				
Packaging Quantity	100			
Packaging Method	Bag			
Other				
Serviceable	Yes			
Connector Position Assurance Capable	No			

Housing for Female Terminals, Wire-to-Wire, 8 Position, .217 in / .138 in [5.5 mm / 3.5 mm] Centerline, Natural, Signal, Multilock Connector System



## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Housing for Female Terminals, Wire-to-Wire, 8 Position, .217 in / .138 in [5.5 mm / 3.5 mm] Centerline, Natural, Signal, Multilock Connector System






# Also in the Series | Multilock Connector System

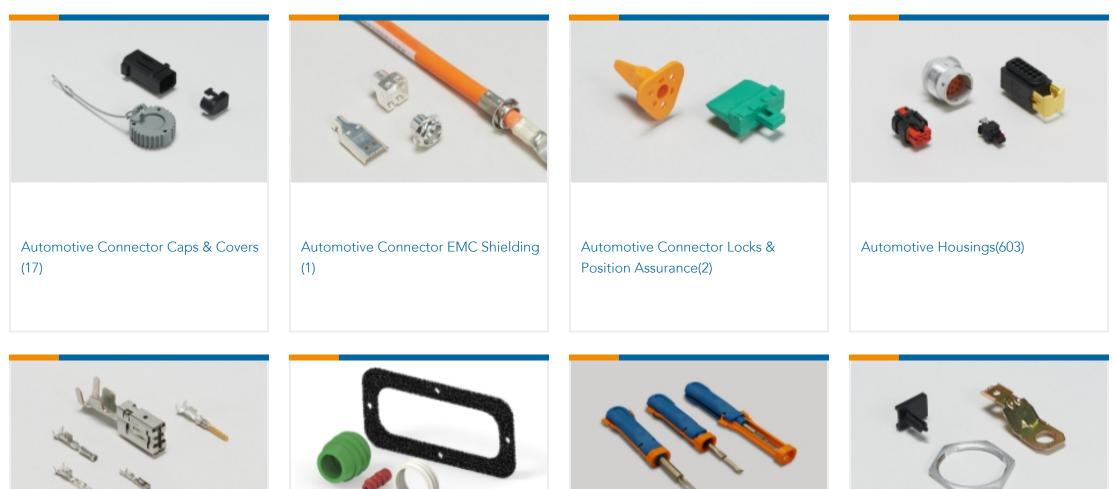


Automotive Terminals(141)	Connector Seals & Cavity Plugs(2)	Insertion & Extraction Tools(6)	Other Automotive Connector
			Accessories(14)

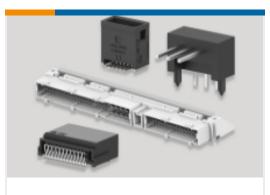


PCB Headers & Receptacles(142)

# Customers Also Bought

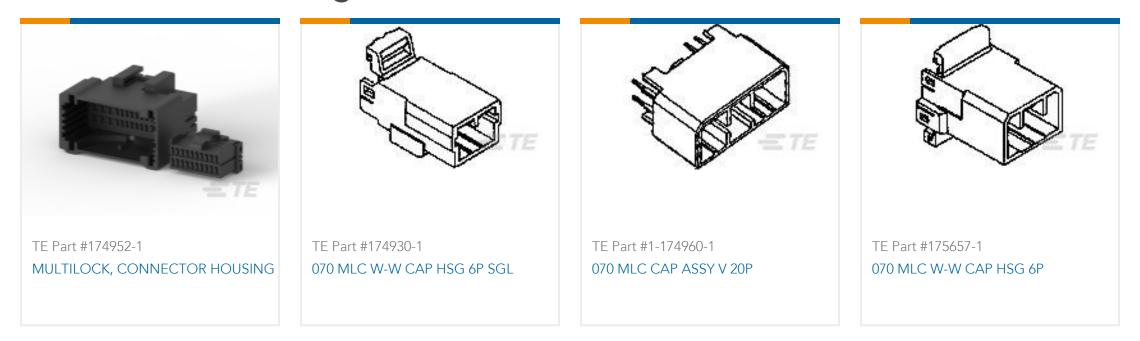

Housing for Female Terminals, Wire-to-Wire, 8 Position, .217 in / .138 in [5.5 mm / 3.5 mm] Centerline, Natural, Signal, Multilock Connector System



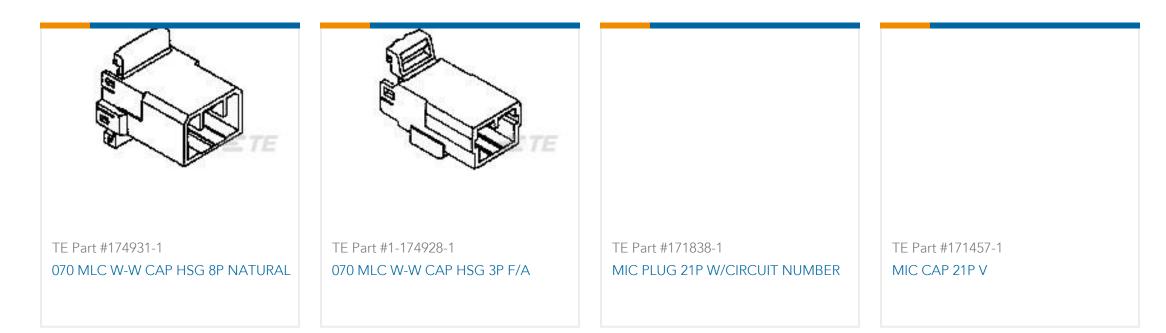



## Documents

**Product Drawings** 070 MLC W-W PLUG HSG 8P F/A

Japanese

# **CAD** Files **Customer View Model** ENG\_CVM\_CVM\_1-173850-1\_G.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1-173850-1\_G.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-173850-1\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages MULTILOCK Connector System

English

**Product Specifications Application Specification** English

.070 Series Receptacle Contact

English

Housing for Female Terminals, Wire-to-Wire, 8 Position, .217 in / .138 in [5.5 mm / 3.5 mm] Centerline, Natural, Signal, Multilock Connector System

