


### HPI

TE Internal #: 1-1775441-4 Housing, Receptacle, Wire-to-Wire, 14 Position, .059 in [1.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, HPI

#### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

AMP HPI 1.5 mm Receptacle Housings

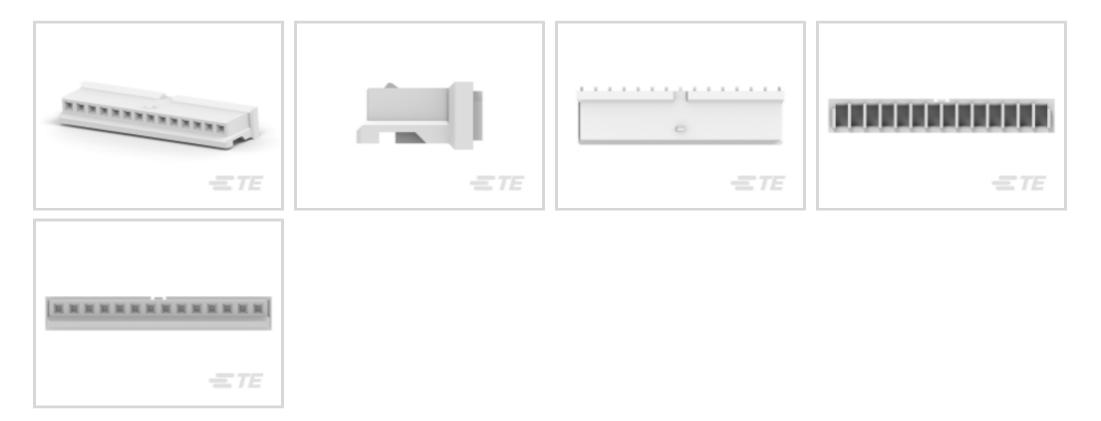

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Wire

Number of Positions: 14

Centerline (Pitch): 1.5 mm [.059 in]

All AMP HPI 1.5 mm Receptacle Housings (15)



## Features

### **Product Type Features**

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	14
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	

Housing, Receptacle, Wire-to-Wire, 14 Position, .059 in [1.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, HPI



Primary Product Color	Natural
Contact Features	
Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Lock
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	Thermoplastic
Centerline (Pitch)	1.5 mm[.059 in]
Dimensions	
Connector Length	22.1 mm[.87 in]
Connector Height	2.7 mm[.106 in]
Connector Width	6.15 mm[.246 in]
Wire Size	.05 – .02 mm <sup>2</sup>
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1000

Housing, Receptacle, Wire-to-Wire, 14 Position, .059 in [1.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, HPI



Packaging Method

Bag

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Also in the Series | HPI

**C** For support call+1 800 522 6752

09/27/2023 11:39AM | Page 3

Housing, Receptacle, Wire-to-Wire, 14 Position, .059 in [1.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, HPI



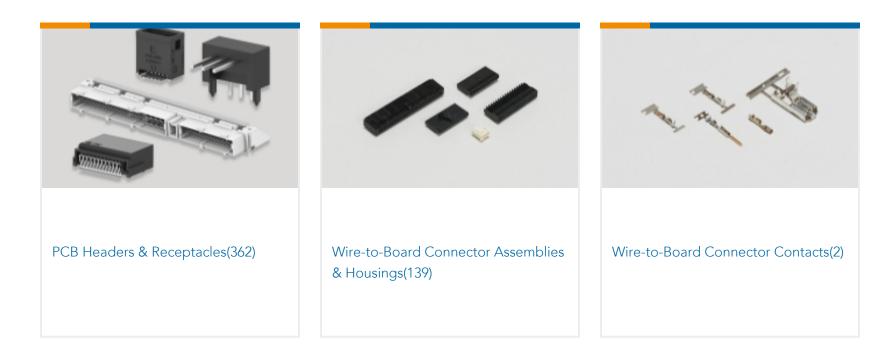

# Customers Also Bought



# Documents

# **Product Drawings** EMIX CONN., 1.5MM PITCH, RCPT, HSG, 14P

English

### **CAD** Files

**Customer View Model** 

ENG\_CVM\_CVM\_1-1775441-4\_B.2d\_dxf.zip

English

### 3D PDF

3D

**Customer View Model** ENG\_CVM\_CVM\_1-1775441-4\_B.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_1-1775441-4\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages **HPI Connectors QRG** 

English

**Product Specifications Application Specification** 

English

Housing, Receptacle, Wire-to-Wire, 14 Position, .059 in [1.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, HPI

