
# SQBW4015RJFASTON <

CGS | CGS SQ
TE Internal #: 1-1879068-0
15 Ω, Wire Wound, Power Resistor, 5 %, 10.5 x 8 x 18 mm, 2
Termination, Loose Piece - Box, 40 W, ±300 ppm/°C, Radial-Leaded FASTON, CGS SQ

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Horizontal Mount

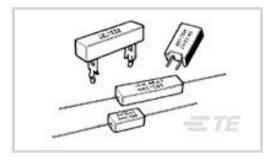

Resistor Type: Power Resistor

Passive Component Dimensions: 10.5 x 8 x 18 mm

Number of Terminations: 2

Packaging Method: Loose Piece - Box

Passive Component Tolerance: 5%

All Wirewound Resistor: Horizontal Mount (157)

## Features

## Product Type Features

Product Type

Resistor Type

Fixed Resistor

Power Resistor

Element Type	Wire Wound	
Configuration Features		
Number of Resistors	1	
Electrical Characteristics		
Passive Component Tolerance	5 %	
Resistance Class	Up to 1kΩ	
Resistance Value	15 Ω	
Power Rating	40 W	
Body Features		
Passive Component Lead Type	Radial-Leaded FASTON	
Termination Features		
Number of Terminations	2	
Dimensions		
Passive Component Dimensions	10.5 x 8 x 18 mm	

## SQBW4015RJFASTON

15  $\Omega$ , Wire Wound, Power Resistor, 5 %, 10.5 x 8 x 18 mm, 2 Termination, Loose Piece - Box, 40 W, ±300 ppm/°C, Radial-Leaded FASTON, CGS SQ



#### **Usage Conditions**

Temperature Coefficient

## Packaging Features

Packaging Method

±300 ppm/°C

Loose Piece - Box

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Wave solder capable to 265°C			

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




#### SQBW4015RJFASTON


15 Ω, Wire Wound, Power Resistor, 5 %, 10.5 x 8 x 18 mm, 2 Termination, Loose Piece - Box, 40 W, ±300 ppm/°C, Radial-Leaded FASTON, CGS SQ



## Also in the Series | CGS SQ

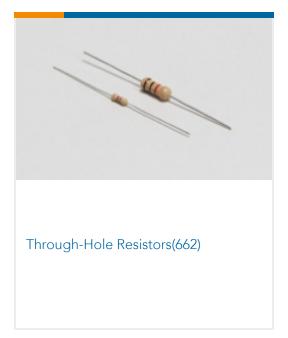

# Customers Also Bought

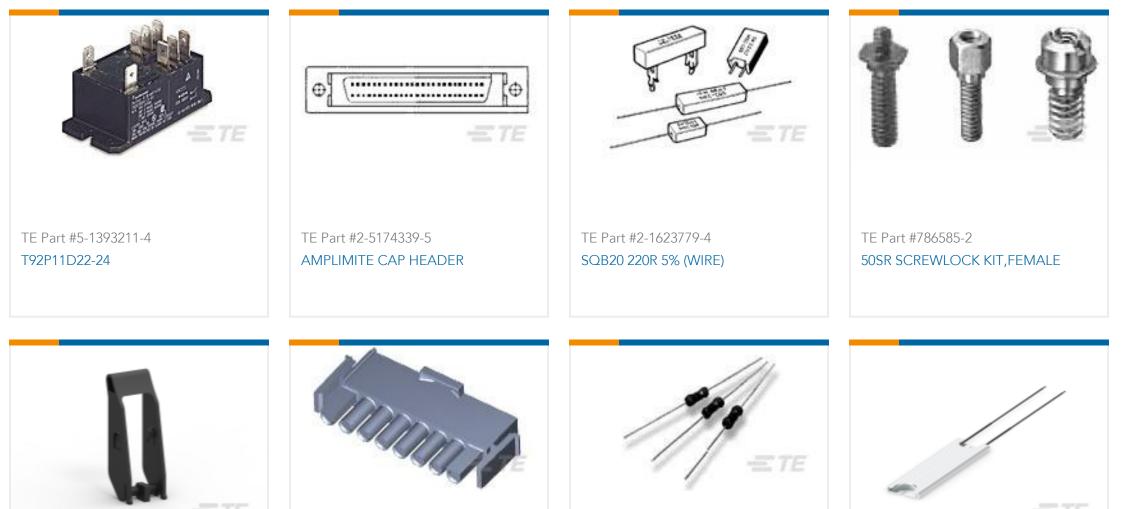

= 12			= / E	
TE Part #2022103-1	TE Part #640586-1	TE Part #5-1625892-5	TE Part #2176489-7	
RT17017	08P UMNL PLUG HSG V2 NATL	3W SM M/OX 5% 4K7	HCL130 70W 10R 5% Cable 150mm	



## Documents

Product Drawings SQB40 15R 5% (WIRE) 6.35MM FAS

English

## Datasheets & Catalog Pages 4-1773460-6\_RESISTIVE\_SOLUTIONS\_RAIL

English

#### SQBW4015RJFASTON

15 Ω, Wire Wound, Power Resistor, 5 %, 10.5 x 8 x 18 mm, 2 Termination, Loose Piece - Box, 40 W, ±300 ppm/°C, Radial-Leaded FASTON, CGS SQ



1309350\_PASSIVE\_COMPONENT

English

8-1773459-4\_POWER\_FILTERING\_AND\_RESISTIVE\_SOLUTIONS\_FOR\_ELEVATORS\_AND\_ESCALATORS

English