1-1924067-2 - ACTIVE

MCON Interconnection System

TE Internal #: 1-1924067-2 Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, MCON Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	2
Number of Rows	1
Body Features	
Primary Product Color	Black
Connector & Keying Code	В
Contact Features	
Contact Size	1.2mm
Contact Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]
Mechanical Attachment	

C For support call+1 800 522 6752

09/18/2023 08:30PM | Page 1

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Connector Height	15.8 mm[.622 in]
Product Width	26.5 mm[1.043 in]
Product Length	15 mm[.591 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 ° F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67
Other	
Other	
Serviceable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




			=TE	
TE Part # 9 MQS SGL	67067-1 WIRE SEAL	TE Part # 967067-2 MQS EINZELLEITDICHT	TE Part # CAT-M4595-T273 MCON Receptacle and Tab	

Also in the Series | MCON Interconnection System

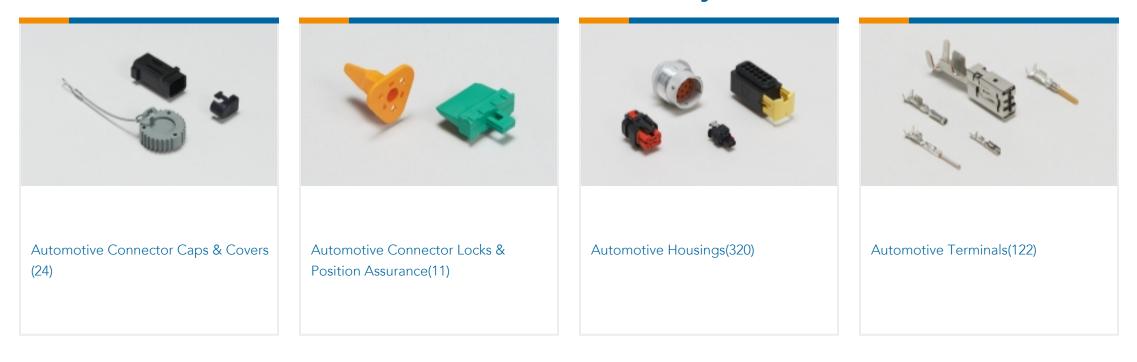

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, MCON Interconnection System



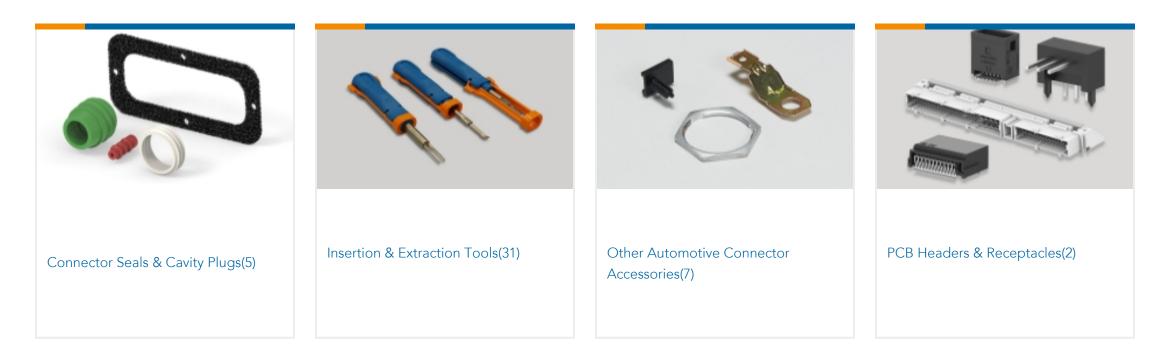

Customers Also Bought



	.187 PLUG HSG ASSY 2P GRAY	2.8MM BLD,SEAL,20AWG	2POS, MCON 1.2 CB REC 2p TL SEALED	2POS, MCON 1.2 CB REC 2p TL SEALED
--	----------------------------	----------------------	---------------------------------------	---------------------------------------



ASSY, PLUG HSG 3 POS, KEY A

Documents

Product Drawings 2POS, MCON 1.2 CB REC 2p TL SEALED

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-1924067-2_C.2d_dxf.zip

English

3D PDF

& For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, MCON Interconnection System



3D

Customer View Model ENG_CVM_CVM_1-1924067-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1924067-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MCON Interconnection System

English

Instruction Sheets Instruction Sheet (U.S.) English Instruction Sheet (U.S.)

English