

Economy Power 2.5 TE Internal #: 1-1969442-1 Housing, Receptacle, Wire-to-Board, 11 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Board Number of Positions: 11 Centerline (Pitch): 2.5 mm [.098 in ]

## Features



### Product Type Features

Connector Product Type	Housing				
Connector & Housing Type	Receptacle				
Connector System	Wire-to-Board				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	11				
Number of Rows	1				
Electrical Characteristics					
Operating Voltage	250 VAC				
Body Features					
Primary Product Color	Natural				
Contact Features					

Housing, Receptacle, Wire-to-Board, 11 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Contact Type	Socket		
Contact Base Material	Copper Alloy		
Contact Current Rating (Max)	4.5 A		
Termination Features			
Termination Method to Wire & Cable	Crimp		
Mechanical Attachment			
Strain Relief	Without		
Panel Mount Feature	Without		
PCB Mount Retention	Without		
Mating Retention Type	Latch		
Mating Retention	With		
Connector Mounting Type	Cable Mount (Free-Hanging)		
Housing Features			
Housing Entry Configuration	Both Ends Closed		
Housing Material	Nylon - GF		
Centerline (Pitch)	2.5 mm[.098 in]		

### Dimensions

Connector Length	29.8 mm[1.173 in]
Connector Height	8 mm[.315 in]
Connector Width	9.58 mm[.377 in]
Wire Size	.13 – .33 mm²
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power
Circuit Application Industry Standards	Power
	Power Standard Part - Not Glow Wire
Industry Standards	
Industry Standards Glow Wire Rating	Standard Part - Not Glow Wire
Industry Standards Glow Wire Rating UL Flammability Rating	Standard Part - Not Glow Wire

Housing, Receptacle, Wire-to-Board, 11 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



Housing, Receptacle, Wire-to-Board, 11 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5









# Also in the Series | Economy Power 2.5



PCB Headers & Receptacles(494)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)	Wire-to-Board Connector Assemblies
			& Housings(311)




# **Customers Also Bought**

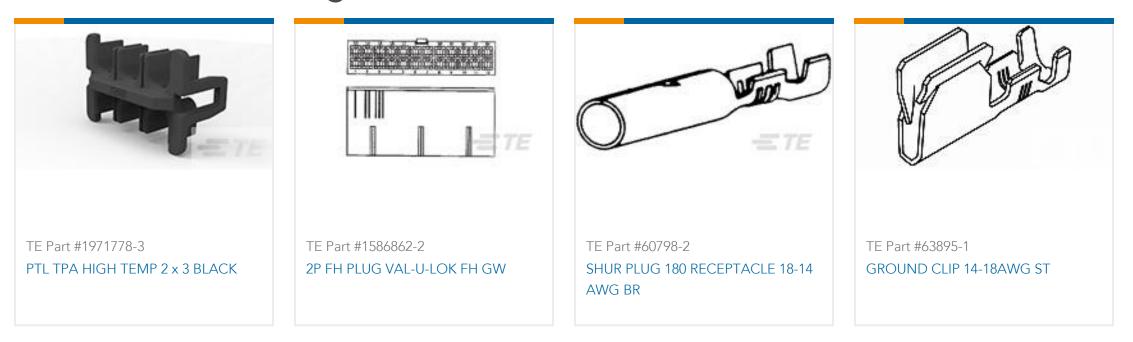

Housing, Receptacle, Wire-to-Board, 11 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



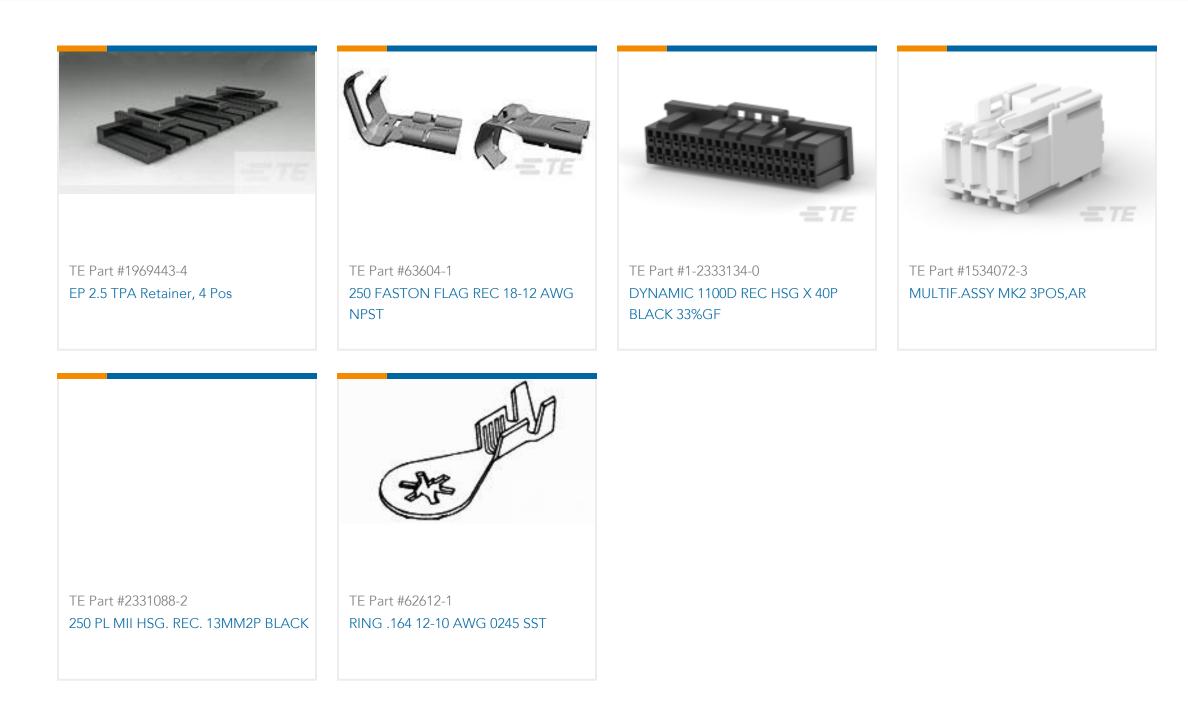

# Documents

Product Drawings

EP 2.5 TPA Housing, 11 Pos

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1-1969442-1\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1969442-1\_C.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1969442-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 7-1773461-6\_EP2.5\_Connector\_Series

English

Product Specifications
Application Specification

English

Product Environmental Compliance TE Material Declaration

Housing, Receptacle, Wire-to-Board, 11 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



English
Instruction Sheets
Instruction Sheet (U.S.)
English
Agency Approvals
UL Report
English