
1-1971776-4 - ACTIVE

Power Triple Lock TE Internal #: 1-1971776-4 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 8 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK Plug, Standard Temperature

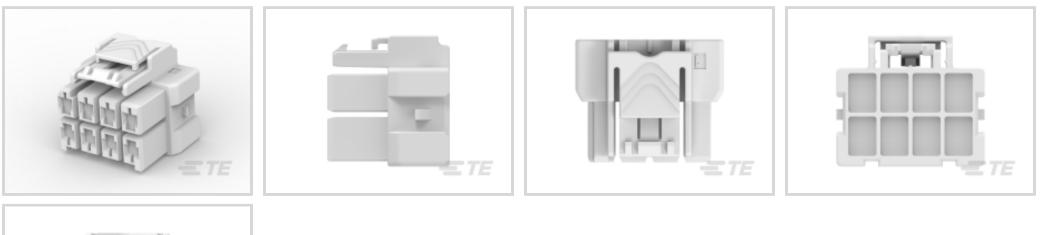



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 8

Centerline (Pitch): 6 mm [.236 in]

All POWER TRIPLE LOCK Plug, Standard Temperature (48)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	8
Number of Power Positions	8
Number of Rows	2
Electrical Characteristics	
Operating Voltage	600 VDC
Body Features	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 8 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°	
Connector & Keying Code	A	
Contact Features		
Contact Layout	Matrix	
Contact Retention Within Housing	Without	
Contact Type	Receptacle	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Panel Mount Feature	Without	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	6 mm[.236 in]	
Housing Color	Natural	
Housing Material	PBT GF	
Dimensions		
Row-to-Row Spacing	8.1 mm[.319 in]	

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Power	
Identification Marking		
Circuit Identification Feature	With	
Industry Standards		
UL Rating	Recognized	
Agency/Standard	UL	
Approved Standards	UL E28476	
UL Flammability Rating	UL 94V-0	
Glow Wire Rating	Standard Part - Not Glow Wire	
Packaging Features		
Packaging Method	Carton	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 8 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Soldor Process Capability	Not reviewed for colder process capability	

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 8 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





Also in the Series | Power Triple Lock

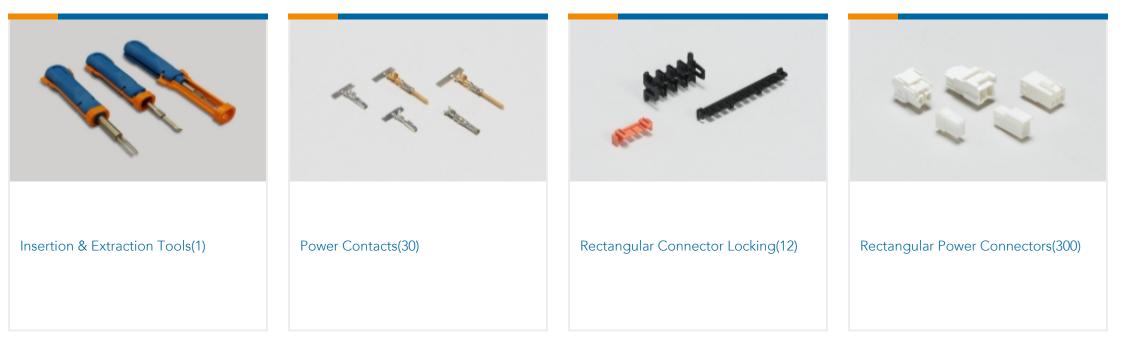

Customers Also Bought



TE Part #T4113001051-000	TE Part #1-1971773-4	TE Part #1-1971772-4	TE Part #1971777-4
M12,MALE,RA,A CODE,5P,PG7,GOLD	POWER TRIPLE LOCK Plug, Standard Temperature	Standard Temperature Caps POWER TRIPLE LOCK	PTL TPA HIGH TEMP 1 x 4 BLACK
-TE		ETE	
TE Part #1971789-1 CPA	TE Part #62336-1 110 FASTON FLAG REC 22-18 AWG TPBR	TE Part #1971779-2 PTL RECEPTACLE CONTACT, 12 AWG	TE Part #626038-2 RING TONGUE 4-6 MM2 0.79 X 16.18 TPBR

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1971776-4_E.2d_dxf.zip

English

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 8 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Customer View Model

ENG_CVM_CVM_1-1971776-4_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1971776-4_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance TE Material Declaration

English