

Power Triple Lock TE Internal #: 1-1971776-6 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK Plug, Standard Temperature



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 6 mm [.236 in]

All POWER TRIPLE LOCK Plug, Standard Temperature (48)



Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	12
Number of Power Positions	12
Number of Rows	2
Electrical Characteristics	
Operating Voltage	600 VDC
Body Features	

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°
Connector & Keying Code	A
Contact Features	
Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Receptacle
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Natural
Housing Material	PBT GF
Dimensions	
Row-to-Row Spacing	8.1 mm[.319 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Power	
Identification Marking		
Circuit Identification Feature	With	
Industry Standards		
UL Rating	Recognized	
Agency/Standard	UL	
Approved Standards	UL E28476	
UL Flammability Rating	UL 94V-0	
Glow Wire Rating	Standard Part - Not Glow Wire	
Packaging Features		
Packaging Method	Carton	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Soldor Process Capability	Not reviewed for colder process capability	

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





Also in the Series | Power Triple Lock

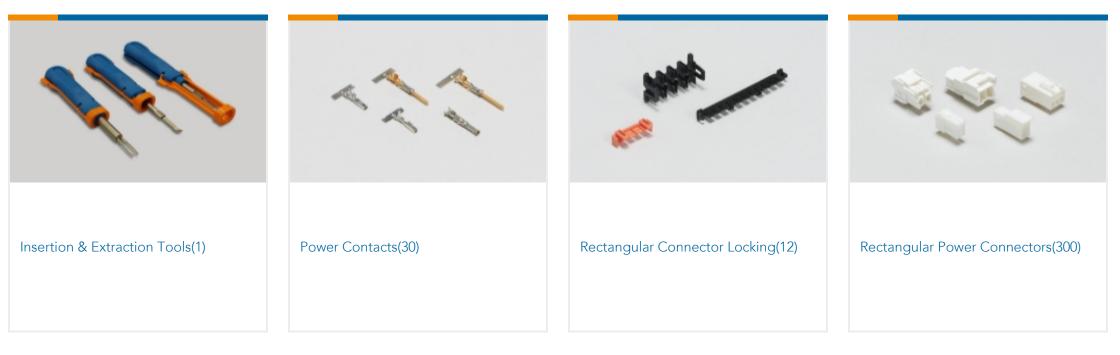

Customers Also Bought



= TE		TE	
TE Part #W4PC Wedgelocks: DEUTSCH DT	TE Part #5-1971776-3 PTL 2X3 PLUG HSG HIGH TEMP KEY A LGR	TE Part #1-1971775-3 POWER TRIPLE LOCK Plug, Standard Temperature	TE Part #1971237-2 PTL RECEPTACLE CONTACT, 2X20 AWG



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1971776-6_E.2d_dxf.zip

English

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Customer View Model

ENG_CVM_CVM_1-1971776-6_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1971776-6_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance TE Material Declaration

English