

GRACE INERTIA 2.5 TE Internal #: 1-1981970-2 Rectangular Connector Housings, Wire-to-Wire, 8 Position, .098 in [2.5 mm] Centerline, 2 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Housings > STD Temp Sig GRACE INERTIA Plug



Connector System: Wire-to-Wire

Number of Positions: 8

Centerline (Pitch): 2.5 mm [.098 in]

Number of Rows: 2

Housing Material: PBT GF

All STD Temp Sig GRACE INERTIA Plug (63)



Features

Product Type Features

Connector System	Wire-to-Wire
Connector & Housing Type	Plug
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Cavities	8
Number of Positions	8
Number of Rows	2
Electrical Characteristics	
Operating Voltage	250 VAC
Contact Features	
Contact Layout	Matrix

Rectangular Connector Housings, Wire-to-Wire, 8 Position, .098 in [2.5 mm] Centerline, 2 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



Contact Type	Socket
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Color	Red
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBT GF
Dimensions	
Connector Height	11 mm[.511 in]
Product Width	15.2 mm[.598 in]
Product Length	13.7 mm[.539 in]
Row-to-Row Spacing	7.6 mm[.3 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Halogen Free	No
Circuit Application	Signal

Identification Marking

Circuit Identification Feature	Without	
Industry Standards		
Glow Wire Rating	Standard Part - Not Glow Wire	
Packaging Features		
Packaging Quantity	1000	
Packaging Method	Bag	
Product Compliance For compliance documentation, visit the product page on TE.com>		
-	Compliant	
For compliance documentation, visit the product page on TE.com>	Compliant Compliant	
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU		

Rectangular Connector Housings, Wire-to-Wire, 8 Position, .098 in [2.5 mm] Centerline, 2 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | GRACE INERTIA 2.5

A Contraction of the second se		C. S. S. S. S.	
Connector Contacts(2)	PCB Headers & Receptacles(138)	PCB Latches, Locks & Retainers(5)	Rectangular Connector Housings(49)

Rectangular Connector Housings, Wire-to-Wire, 8 Position, .098 in [2.5 mm] Centerline, 2 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



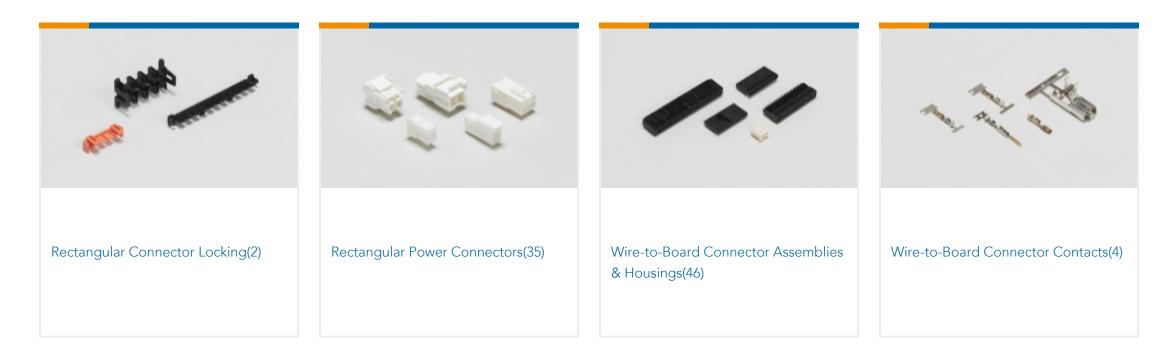

Customers Also Bought



GIC 2.5 W PLUG HSG 3P BLUE

ANVIL



Documents

Product Drawings GIC2.5W PLUG HOUSING 8POS (2-ROW) RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1981970-2_E_c-1-1981970-2-e.2d_dxf.zip

Rectangular Connector Housings, Wire-to-Wire, 8 Position, .098 in [2.5 mm] Centerline, 2 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



English

Customer View Model ENG_CVM_CVM_1-1981970-2_E_c-1-1981970-2-e.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1981970-2_E_c-1-1981970-2-e.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English