




SFP28

TE Internal #: 1-2007394-5

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector,  
Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI  
Enhanced, With Lightpipe

[View on TE.com >](#)

Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+ > SFP+ Stacked Cage Assemblies

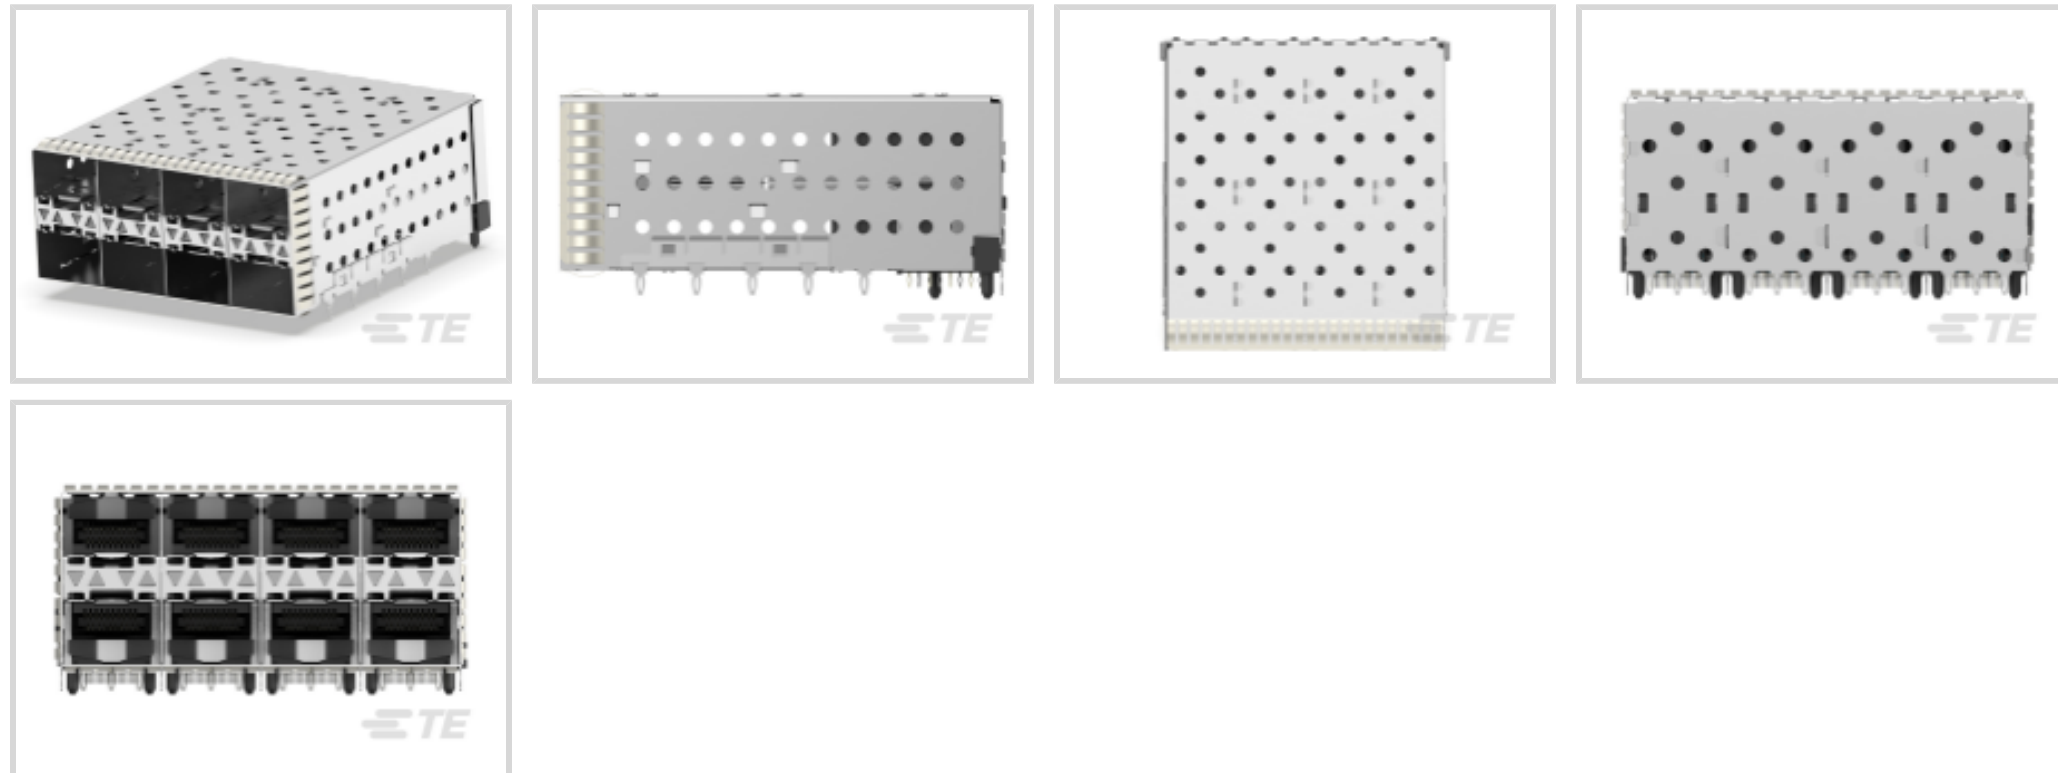

Pluggable I/O Product Type: **Cage Assembly with Integrated Connector**

Data Rate (Max): **16 Gb/s**

EMI Containment Feature Type: **Internal/External EMI Springs**

Pluggable I/O Applications: **EMI Enhanced**

Lightpipe Options: **With Lightpipe**

[All SFP+ Stacked Cage Assemblies \(122\)](#)

**Features**

**Product Type Features**

|                                   |   |
|-----------------------------------|---|
| Form Factor                       | SFP+                                    |
| Cage Type                         | Stacked                                 |
| Pluggable I/O Product Type        | Cage Assembly with Integrated Connector |
| Lightpipe Options                 | With Lightpipe                          |
| Connector System                  | Cable-to-Board                          |
| Sealable                          | No                                      |
| Connector & Contact Terminates To | Printed Circuit Board                   |

**Configuration Features**

|                           |                                 |
|---------------------------|---------------------------------|
| Port Matrix Configuration | 2 x 4                           |
| Lightpipe Configuration   | Four Triangular (Inner & Outer) |
| Number of Ports           | 8                               |
| Number of Positions       | 160                             |



### Electrical Characteristics

|                 |         |
|-----------------|---------|
| Data Rate (Max) | 16 Gb/s |
|-----------------|---------|

### Contact Features

|  |  |
|--|--|
| Tail Plating Material                          | Tin                                      |
| Contact Mating Area Plating Material Thickness | .76 $\mu$ m                              |
| Contact Mating Area Plating Material           | Gold or Gold Flash over Palladium Nickel |

### Termination Features

|   |                          |
|---|--------------------------|
| Termination Post & Tail Length              | 3 mm[.118 in]            |
| Termination Method to Printed Circuit Board | Through Hole - Press-Fit |

### Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Connector Mounting Type | Board Mount |
|-------------------------|-------------|

### Housing Features

|                    |                |
|--------------------|----------------|
| Cage Material      | Nickel Silver  |
| Centerline (Pitch) | .8 mm[.032 in] |

### Dimensions

|                             |                 |
|-----------------------------|-----------------|
| PCB Thickness (Recommended) | 1.5 mm[.059 in] |
|-----------------------------|-----------------|

### Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

### Operation/Application

|                            |              |
|----------------------------|--------------|
| Heat Sink Compatible       | No           |
| Pluggable I/O Applications | EMI Enhanced |
| Circuit Application        | Signal       |

### Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

### Packaging Features

|                  |      |
|------------------|------|
| Packaging Method | Tray |
|------------------|------|

### Other

|                              |                               |
|------------------------------|-------------------------------|
| EMI Containment Feature Type | Internal/External EMI Springs |
|------------------------------|-------------------------------|

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)











|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.  |
| Solder Process Capability                     | Not applicable for solder process capability  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

|   |  |   |   |
|---|--|---|---|
|  <p>TE Part # CAT-C11-H50626<br/>SFP+ to SFP+ I/O Cable Assembly: 30 AWG</p> |  <p>TE Part # CAT-C11-N490333<br/>QSFP28-Four SFP+ Cable Assembly: 30 AWG</p> |  <p>TE Part # CAT-C11-N490325<br/>QSFP28-Four SFP+ Cable Assembly: 26 AWG</p>  |  <p>TE Part # CAT-C11-N4901114<br/>SFP28 to SFP28 Cable Assembly: 30 AWG</p> |
|  <p>TE Part # CAT-C11-N49011<br/>SFP28 to SFP28 Cable Assembly: 26 AWG</p>   |  <p>TE Part # CAT-Q17-N49011<br/>QSFP56-Four SFP56 Cable Assembly: 30 AWG</p> |  <p>TE Part # CAT-Q17-N490333<br/>QSFP56-Four SFP56 Cable Assembly: 26 AWG</p> |  <p>TE Part # 4-2821222-5<br/>SFP56 DIRECT ATTACH CA, 2M, 30AWG</p>          |




TE Part # 4-2821224-5  
SFP56 DIRECT ATTACH CA, 3M, 26AWG



TE Part # 4-2334985-2  
SFP56 DIRECT ATTACH CA, 1M, 32AWG



TE Part # 2007182-1  
SFP Standard 1x2 Light Pipe Assm



TE Part # 2007182-3  
SFP 1x2 Light Pipe Assy, Reduced Length



TE Part # CAT-C11-H5  
SFP+ to SFP+ I/O Cable Assembly: 24 AWG



TE Part # CAT-C11-H506  
SFP+ to SFP+ I/O Cable Assembly: 26 AWG



TE Part # CAT-C11-H5062  
SFP+ to SFP+ I/O Cable Assembly: 28 AWG



TE Part # 2334985-2  
SFP28 DIRECT ATTACH CA, 1M, 32AWG



TE Part # 2007182-2  
SFP 1x2 Light Pipe Assy, Reduced Length



TE Part # 2142970-1  
CABLE ASSY, MICRO SFP+ TO STD SFP+, 0.5M



TE Part # 2142970-2  
CABLE ASSY, MICRO SFP+ TO STD SFP+, 1M



TE Part # 2142970-3  
CABLE ASSY, MICRO SFP+ TO STD SFP+, 2M

### Customers Also Bought



TE Part #2201855-1  
MINI I/O PLUG KIT TYPE I L



TE Part #1-2201855-1  
MINI I/O PLUG KIT TYPE II L



TE Part #2-6609075-1  
6DAS1=F7981 S0



TE Part #K1166104  
Battery Disconnecter 35-414-131-S-900



TE Part #2007251-1  
SFP+ 1x6 Cage Assembly



TE Part #016942-000  
222K121-25/86-0



TE Part #58628-1  
PROCRIMP T&D 26-14 ULTRAFast



TE Part #CSJ-SGFB-100-MHF4  
SMA to MHF4 100mm 0.81 OD



## Documents

### Product Drawings

#### SFP+assy 2x4 Spring Fingers 4

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-2007394-5\\_E.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-2007394-5\\_E.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1-2007394-5\\_E.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

#### Application Specification

English

### Instruction Sheets

#### Instruction Sheet (U.S.)

English

#### Instruction Sheet (U.S.)

English