


SFP28

TE Internal #: 1-2007394-8 SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector, Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI Enhanced, With Lightpipe

View on TE.com >



Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+ > SFP+ Stacked Cage Assemblies

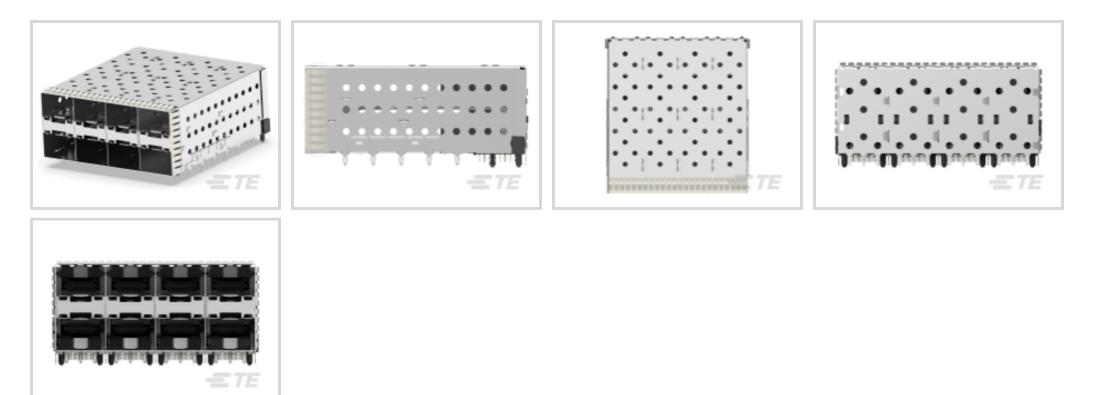

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Data Rate (Max): 16 Gb/s

EMI Containment Feature Type: Internal/External EMI Springs

Pluggable I/O Applications: EMI Enhanced

Lightpipe Options: With Lightpipe

All SFP+ Stacked Cage Assemblies (122)

Features

Product Type Features

Form Factor	SFP+
Cage Type	Stacked
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Lightpipe Options	With Lightpipe
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector & Contact Terminates To Configuration Features	Printed Circuit Board
	Printed Circuit Board 2 x 4
Configuration Features	
Configuration Features Port Matrix Configuration	2 x 4

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector, Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI Enhanced, With Lightpipe



Data Rate (Max)	16 Gb/s
Contact Features	
Tail Plating Material	Tin
Contact Mating Area Plating Material Thickness	.76 µm
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel
Termination Features	
Termination Post & Tail Length	3 mm[.118 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver
Centerline (Pitch)	.8 mm[.032 in]
Dimensions	
PCB Thickness (Recommended)	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Heat Sink Compatible	No
Pluggable I/O Applications	EMI Enhanced
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tray
Other	
EMI Containment Feature Type	Internal/External EMI Springs
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

C For support call+1 800 522 6752

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector, Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI Enhanced, With Lightpipe



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

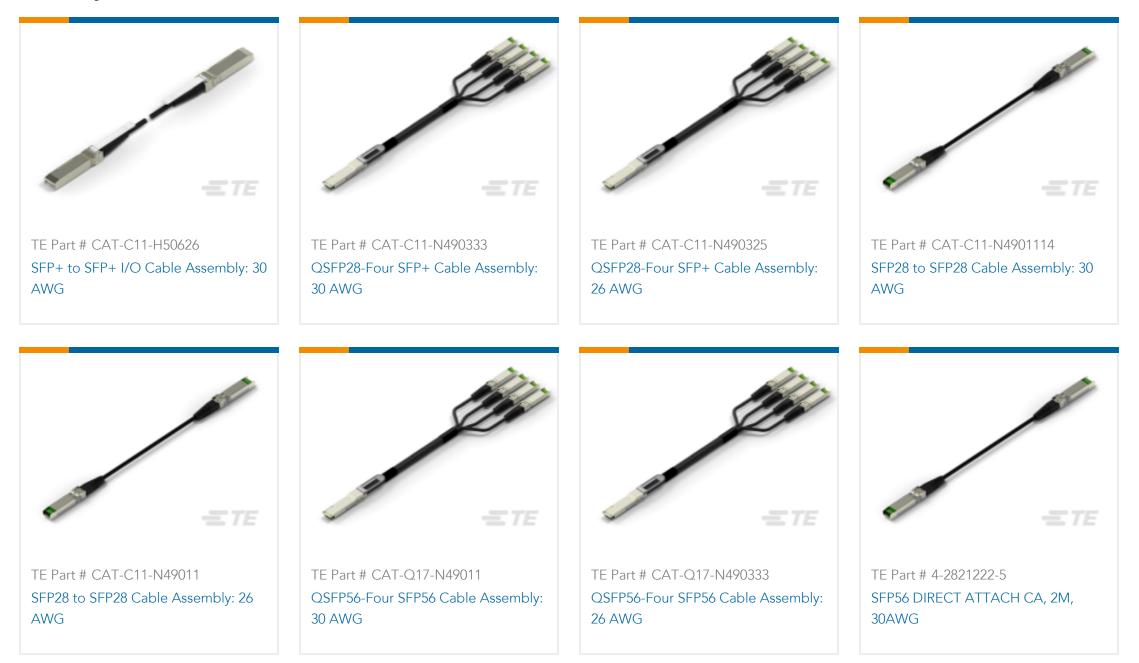

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector, Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI Enhanced, With Lightpipe



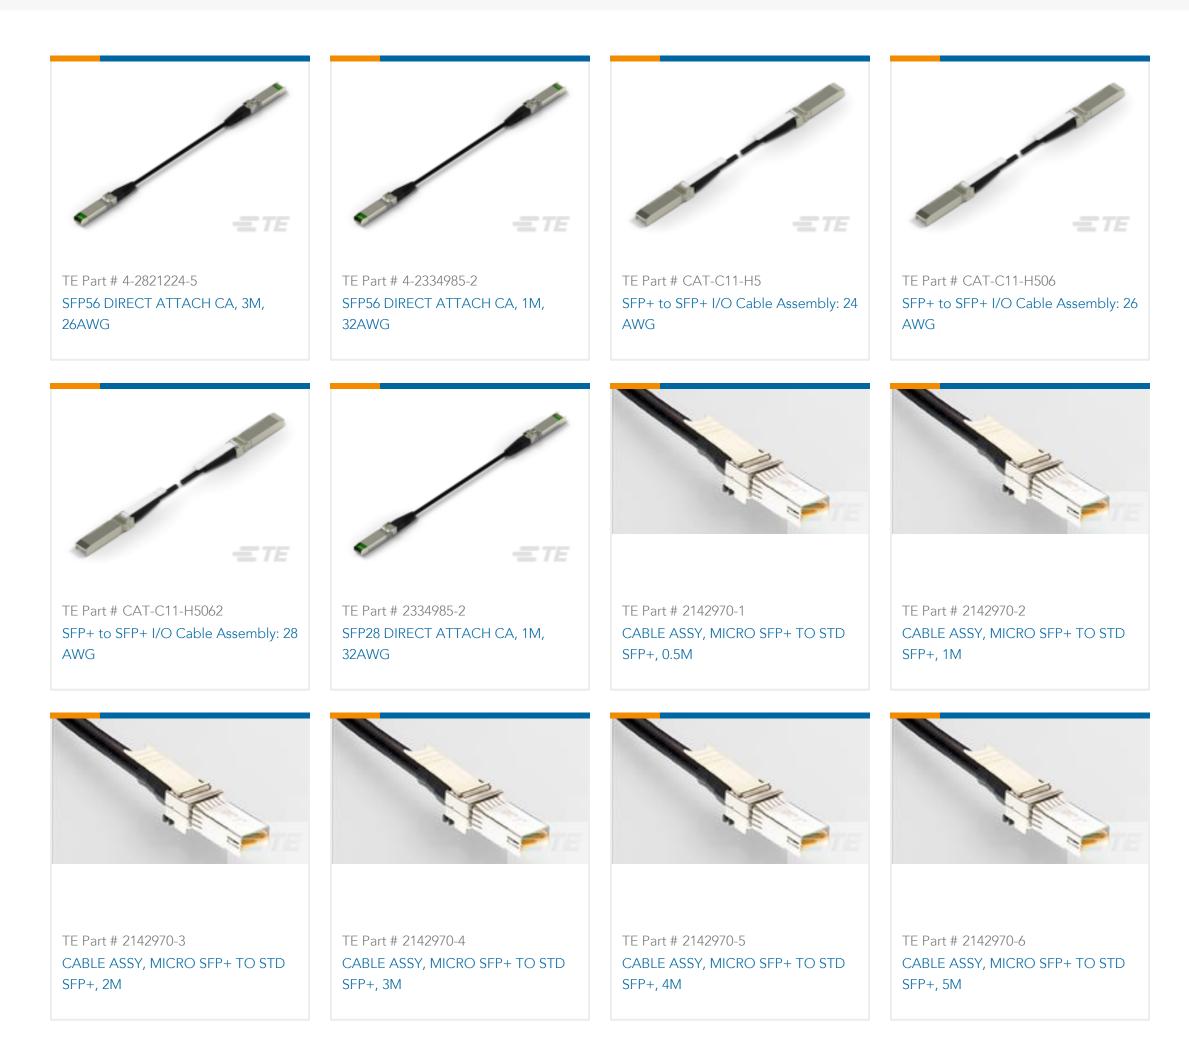

Customers Also Bought



Documents

Product Drawings

SFP+ assy 2x4 EMI Sprg No Lp Sn Enhanced

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2007394-8_E.2d_dxf.zip

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector, Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI Enhanced, With Lightpipe



English Customer View Model ENG_CVM_CVM_1-2007394-8_E.3d_igs.zip English

Customer View Model

ENG_CVM_CVM_1-2007394-8_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.) English Instruction Sheet (U.S.)

English