1-2120959-1 - ACTIVE

TE Internal #: 1-2120959-1 Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, A Polarization Code

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Cable-to-Cable

Number of Positions: 4

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 4A

Features

Product Type Features



Product Type	Connector Assembly
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Plug
Shell Type	Metal
Configuration Features	
Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4
Contacts Preloaded	Yes
Body Features	
Shell Plating Material	Nickel
Shell Base Material	Brass

C For support call+1 800 522 6752

09/27/2023 02:20PM | Page 1

1-2120959-1

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, A Polarization Code



Circular Connector Insulation Material Type	Polyamide
Contact Features	
Contact Current Rating (Max)	4 A
Reverse Gender	Yes
Contact Layout Arrangement	Circular
Circular Connector Contact Type	Socket
Mechanical Attachment	
Polarization Code	A
Mating Alignment Type	Keyed
Mating Retention	With
Dimensions	
Wire Size	.25 mm ²
Usage Conditions	
Operating Temperature Range	-25 – 90 °C[-13 – 194 °F]
Operation/Application	
Circuit Application	Signal
Shielded	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (4% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

C For support call+1 800 522 6752

1-2120959-1

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, A Polarization Code




Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


Compatible Parts




Customers Also Bought

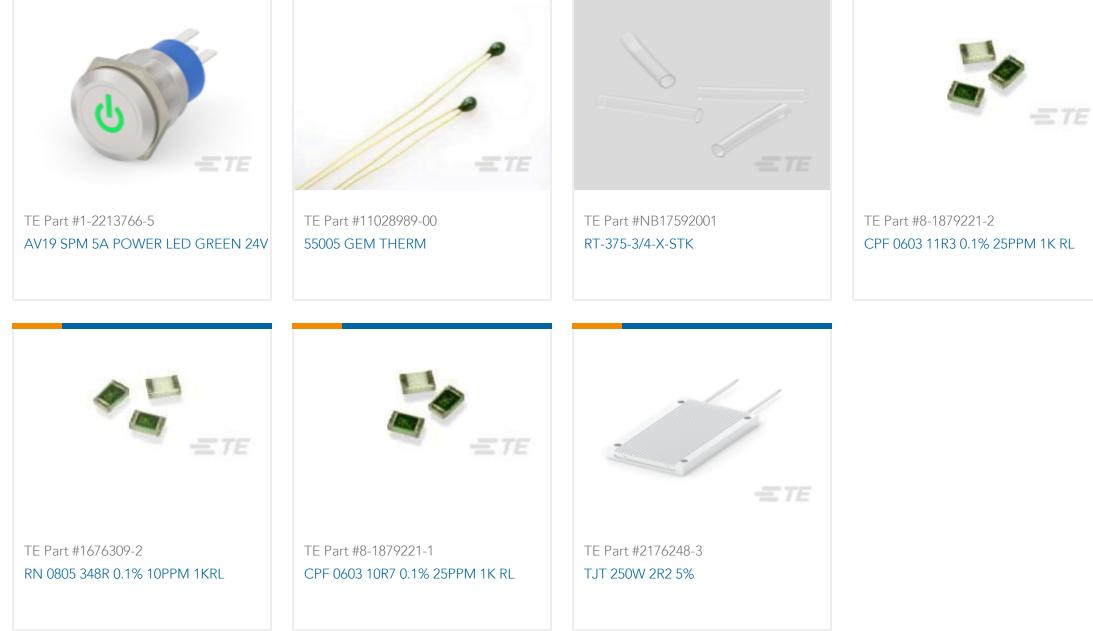

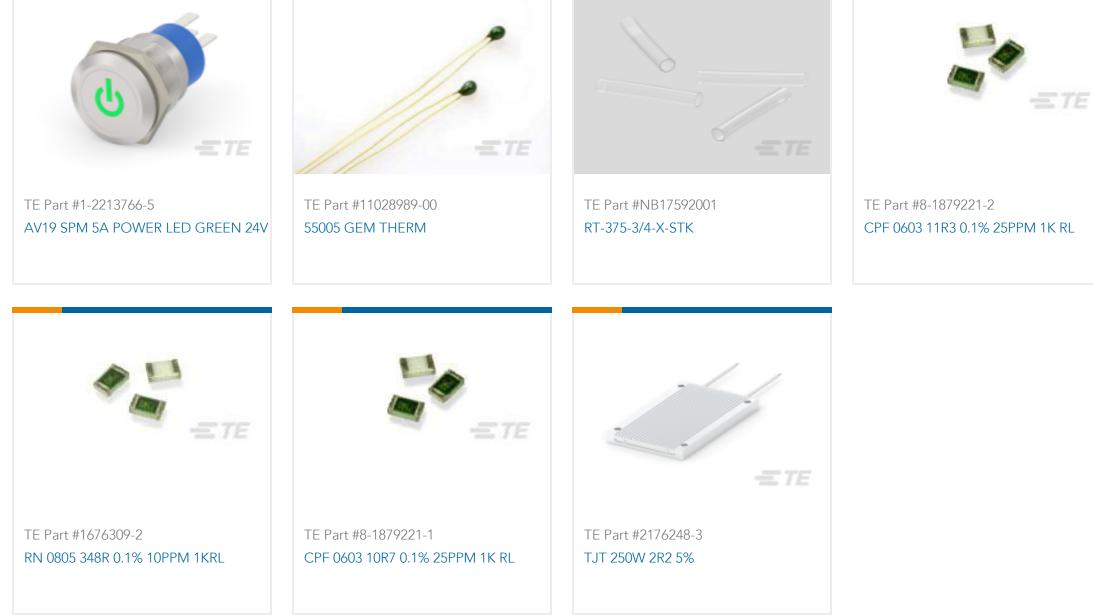

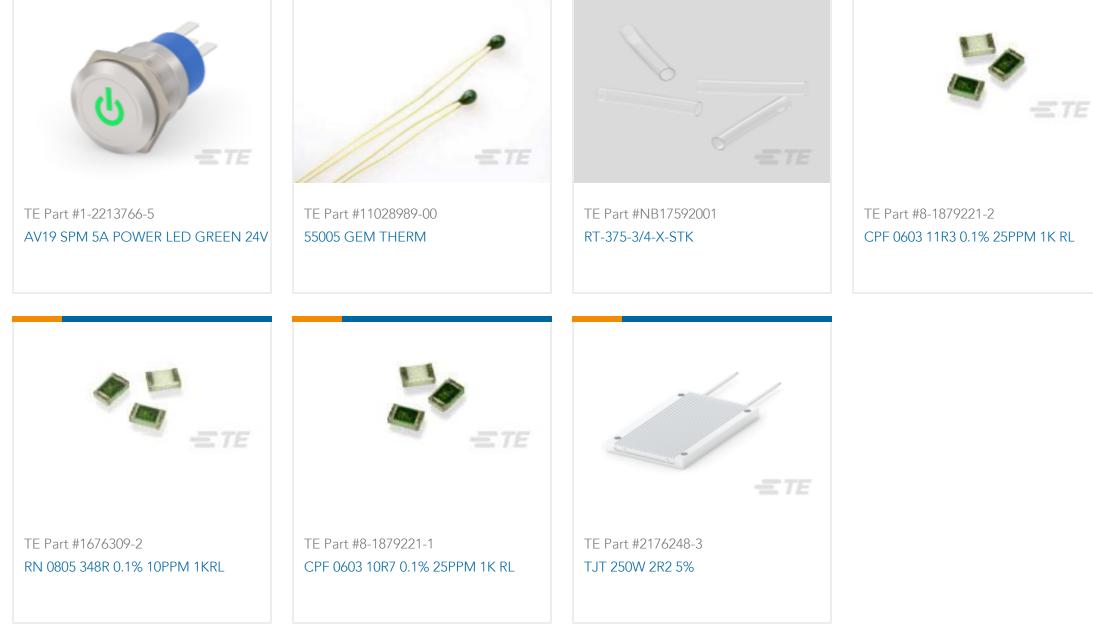

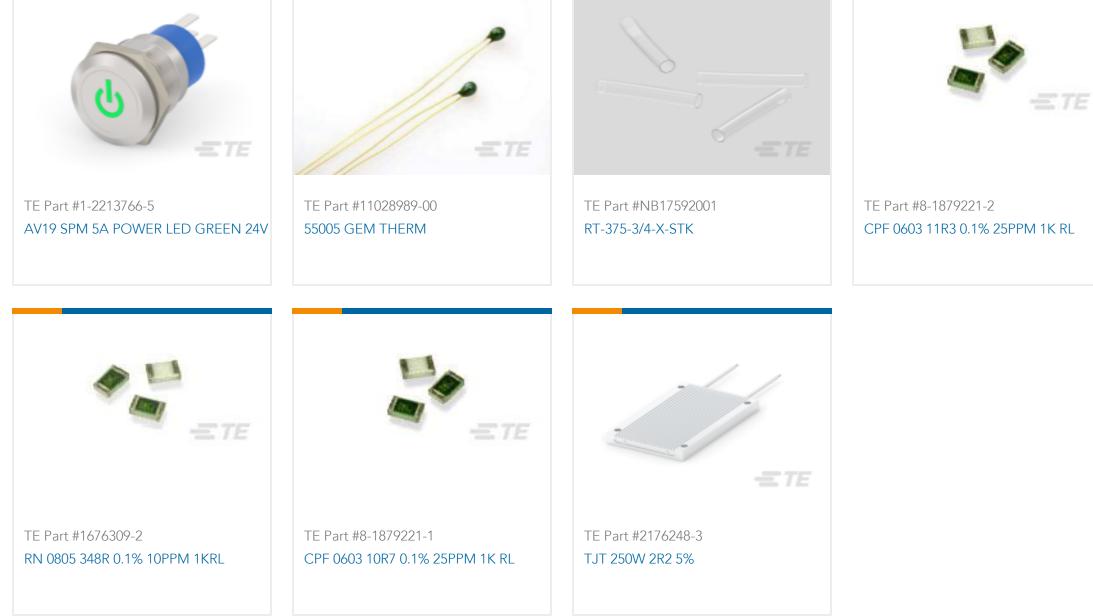

Documents

Product Drawings M8 FEMALE SOCKET WITH WIRES, 0.25 SQMM

English

CAD Files

C For support call+1 800 522 6752

1-2120959-1

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, A Polarization Code



3D PDF

3D

Customer View Model ENG_CVM_CVM_1-2120959-1_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2120959-1_A1.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_1-2120959-1_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog English

M8 / M12 Connector System Catalog

Japanese

1-1773730-5_M8M12_SYSTEM_FLYER

English

Product Specifications Application Specification

English