1-2132403-5 V ACTIVE

SFP28

TE Internal #: 1-2132403-5

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector,

Data Rate (Max) 16 Gb/s, Internal/External EMI Springs, EMI


Enhanced, With Lightpipe

View on TE.com >




Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+ > SFP+ Stacked Cage Assemblies







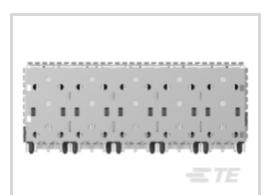



Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Data Rate (Max): 16 Gb/s

EMI Containment Feature Type: Internal/External EMI Springs

Pluggable I/O Applications: EMI Enhanced

Lightpipe Options: With Lightpipe

All SFP+ Stacked Cage Assemblies (122)

Features

Product Type Features

| Form Factor | SFP+ |
|-----------------------------------|---|
| Cage Type | Stacked |
| Pluggable I/O Product Type | Cage Assembly with Integrated Connector |
| Lightpipe Options | With Lightpipe |
| Connector System | Cable-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| Port Matrix Configuration | 2 x 5 |
|---------------------------|---------------------------------|
| Lightpipe Configuration | Four Triangular (Inner & Outer) |
| Number of Ports | 10 |
| Number of Positions | 200 |



Electrical Characteristics

| Electrical Characteristics | |
|--|--|
| Data Rate (Max) | 16 Gb/s |
| Contact Features | |
| Tail Plating Material | Tin |
| Contact Mating Area Plating Material Thickness | .76 µm |
| Contact Mating Area Plating Material | Gold or Gold Flash over Palladium Nickel |
| Termination Features | |
| Termination Post & Tail Length | 3 mm[.118 in] |
| Termination Method to Printed Circuit Board | Through Hole - Press-Fit |
| Mechanical Attachment | |
| Connector Mounting Type | Board Mount |
| Housing Features | |
| Cage Material | Nickel Silver |
| Centerline (Pitch) | .8 mm[.032 in] |
| Dimensions | |
| PCB Thickness (Recommended) | 1.5 mm[.059 in] |
| Usage Conditions | |
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
| Operation/Application | |
| Heat Sink Compatible | No |
| Pluggable I/O Applications | EMI Enhanced |
| Circuit Application | Signal |
| Industry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features | |
| Packaging Method | Tray |
| Other | |
| EMI Containment Feature Type | Internal/External EMI Springs |
| | |

Product Compliance

For compliance documentation, visit the product page on TE.com>




| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

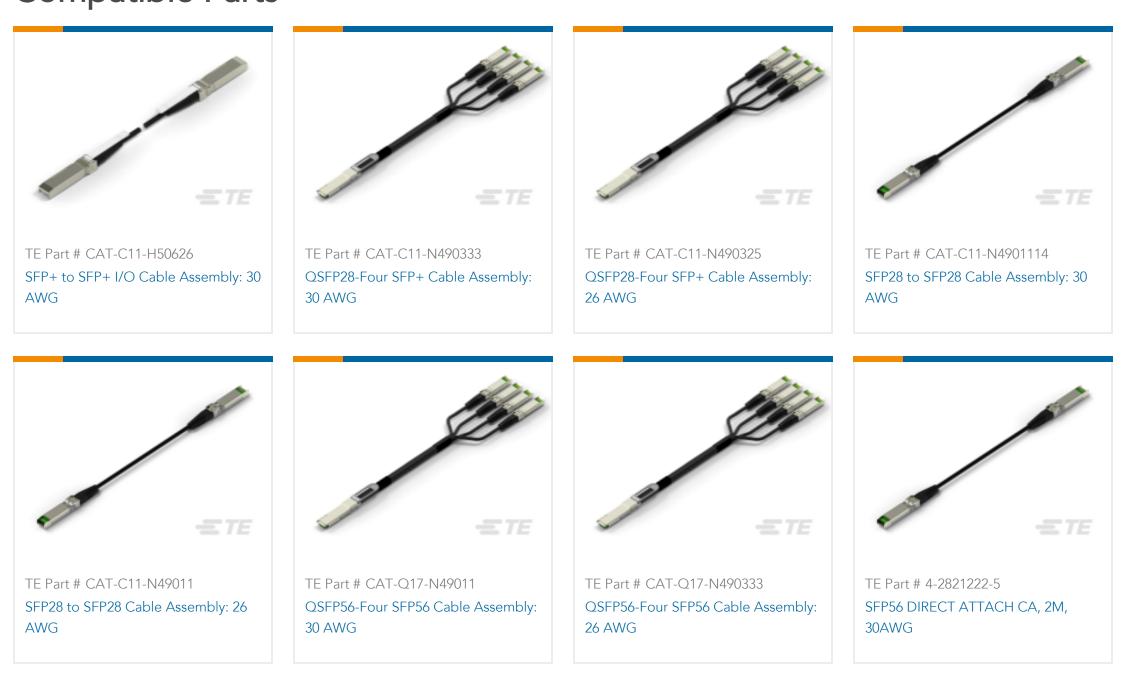





TE Part # 4-2821224-5
SFP56 DIRECT ATTACH CA, 3M,
26AWG



TE Part # 4-2334985-2 SFP56 DIRECT ATTACH CA, 1M, 32AWG



TE Part # CAT-C11-H5 SFP+ to SFP+ I/O Cable Assembly: 24 AWG



TE Part # CAT-C11-H506 SFP+ to SFP+ I/O Cable Assembly: 26 AWG



TE Part # CAT-C11-H5062 SFP+ to SFP+ I/O Cable Assembly: 28 AWG



TE Part # 2334985-2 SFP28 DIRECT ATTACH CA, 1M, 32AWG



TE Part # 2142970-1 CABLE ASSY, MICRO SFP+ TO STD SFP+, 0.5M



TE Part # 2142970-2 CABLE ASSY, MICRO SFP+ TO STD SFP+, 1M



TE Part # 2142970-3 CABLE ASSY, MICRO SFP+ TO STD SFP+, 2M



TE Part # 2142970-4 CABLE ASSY, MICRO SFP+ TO STD SFP+, 3M



TE Part # 2142970-5 CABLE ASSY, MICRO SFP+ TO STD SFP+, 4M



TE Part # 2142970-6 CABLE ASSY, MICRO SFP+ TO STD SFP+, 5M

Customers Also Bought



TE Part #3-647168-3 03P MTA100 HDR ASSY SM 30AU LF



TE Part #2309409-1 DDR4 SODIMM 260P 5.2H STD



TE Part #1469001-1 HM-ZD 4PR RECP 80P



TE Part #2-1761603-5
IDC LOW PRO HDR 14P VERT BLUE



TE Part #5-146280-2 02 MODII HDR SRST B/A .100CL



TE Part #2013289-2 SEMI-HARD TRAY DDR3 204P 5.2H STD Au0.25



TE Part #5-1879337-9 CPF 0603 10K 1% 50PPM 1K RL



TE Part #6-2319848-4
END STACK DIP1PGRECESSSEALT&R





Documents

Product Drawings

2X5 SFP+ EMI Sprg 4 LP Sn Enhanced

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2132403-5_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2132403-5_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2132403-5_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English