1-2232511-5 - ACTIVE

RAST | RAST 5D TE Internal #: 1-2232511-5 PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Natural, RAST 5D

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: Wire-to-Board

Number of Positions: 5

Number of Rows: 1

Centerline (Pitch): 5 mm [.197 in]

PCB Mount Orientation: Vertical

Features

E T E Connectivity

Product Type Features

Connector System	Wire-to-Board			
Header Type	Fully Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Columns	5			
Number of Positions	5			
Number of Rows	1			
PCB Mount Orientation	Vertical			
Electrical Characteristics				
Operating Voltage	250 VAC			
Body Features				
Primary Product Color	Natural			

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Natural, RAST 5D



Contact Features

PCB Contact Termination Area Plating Material Thickness	2 µm[78.74 µin]
Contact Layout	Inline
Mating Tab Width	6.3 mm[.248 in]
Mating Tab Thickness	.8 mm[.032 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	2 µm[78.74 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Rectangular
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	16 A

Termination Features

Square Termination Post & Tail Dimension	.8 mm[.032 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
PCB Mount Alignment Type	Guide Pin
Mating Alignment Type	Keyed
Mating Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without
Housing Features	
Housing Material	Nylon
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Length	27.3 mm[1.07 in]

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Natural, RAST 5D



Connector Height	12.8 mm[.503 in]
Connector Width	14.9 mm[.58 in]
Usage Conditions	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Agency/Standard	UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	150
Packaging Type	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC			
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.			
Solder Process Capability	Not reviewed for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Natural, RAST 5D



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



TE Part # 1-1971845-5 5P, RAST 5 Tab Header, THV



TE Part # 1-2232043-5 5P, RAST 5 Tab Header, THV



TE Part # 1-2322950-5 5P, RAST 5 TAB HEADER SELEC, THV, OPP



TE Part # 2-2232043-5 5P, RAST 5 Tab Header, THV











Also in the Series **RAST 5D**

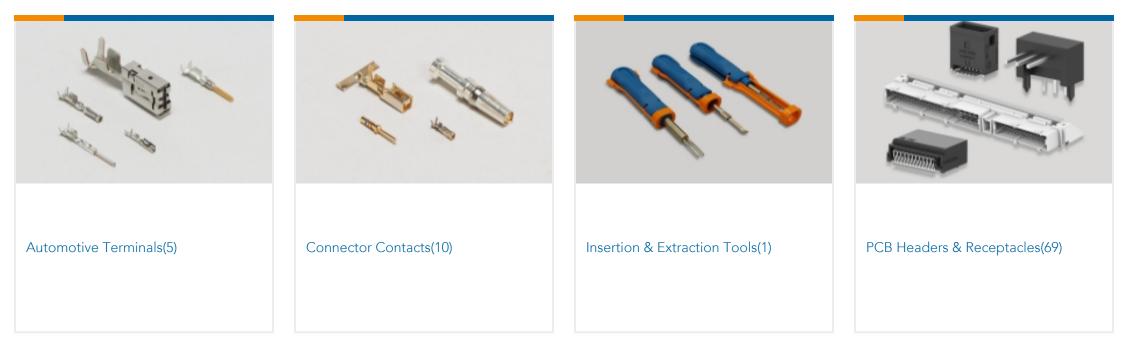

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Natural, RAST 5D



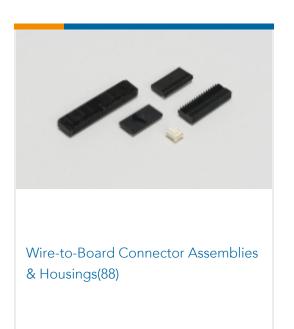

Customers Also Bought



ULTRA-POD 250 ASSY REC 18-14	10P EP SHRD HDR ASMY, WHITE	3P, RAST 5 TAB HEADER, THV	L P OF 583875-5	
AWG NPST				



TE Part #1-1877285-1 11P EP SHRD HDR ASMY, WHITE

Documents

Product Drawings 5P, RAST 5 TAB HEADER, THV

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2232511-5_C.2d_dxf.zip

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Natural, RAST 5D



English

Customer View Model ENG_CVM_CVM_1-2232511-5_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2232511-5_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Standard Power Timer Connector with TPA

English

Product Specifications Product Specification

English

Agency Approvals UL Report

English