
1-2308265-4 - ACTIVE

Rail D-Sub Backshells TE Internal #: 1-2308265-4 Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Accessories > Rectangular Connector Hardware >

Quick Lock Pins for D-Sub with Threaded Inserts

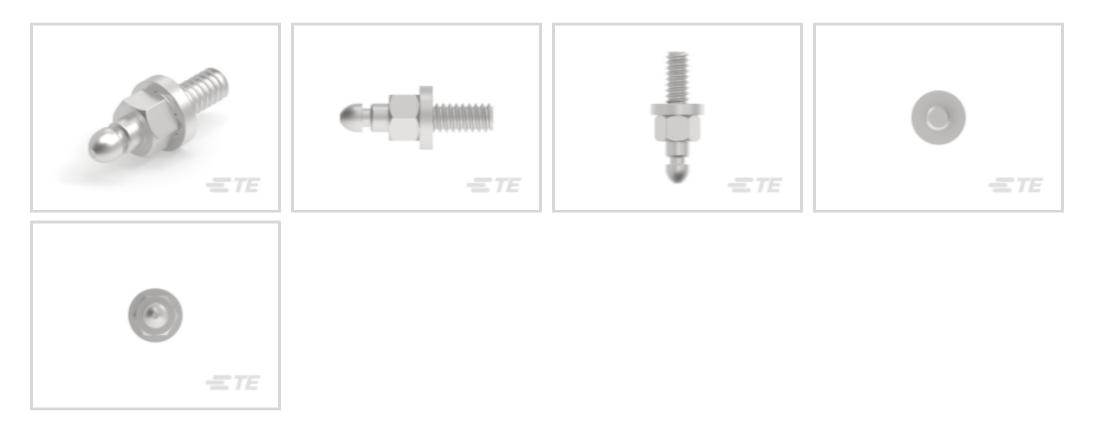

Connector Hardware Type: Quick Lock Pins

Operating Temperature Range: -40 – 90 °C [-40 – 194 °F]

All Quick Lock Pins for D-Sub with Threaded Inserts (10)

Features

Mechanical Attachment



| Thread Size | None |
|--|--|
| Connector Hardware Type | Quick Lock Pins |
| Usage Conditions | |
| Operating Temperature Range | -40 - 90 °C[-40 - 194 °F] |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.5% in Component Part) Article Safe Usage Statements: |

1-2308265-4

Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



| - 12 | | | |
|--|--|--|---|
| TE Part # 1-2308319-1 FULL METAL HOODS SIZE 1 (1) | TE Part # 1-2308330-1 FULL METAL HOODS SIZE 4 (1) | TE Part # 1-2308338-1 QL-FULL METAL HOODS SIZE 5 (1 CABLE CLP) | TE Part # 1-2308321-1 FULL METAL HOODS SIZE 2, (1) |





Also in the Series | Rail D-Sub Backshells

1-2308265-4


Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells



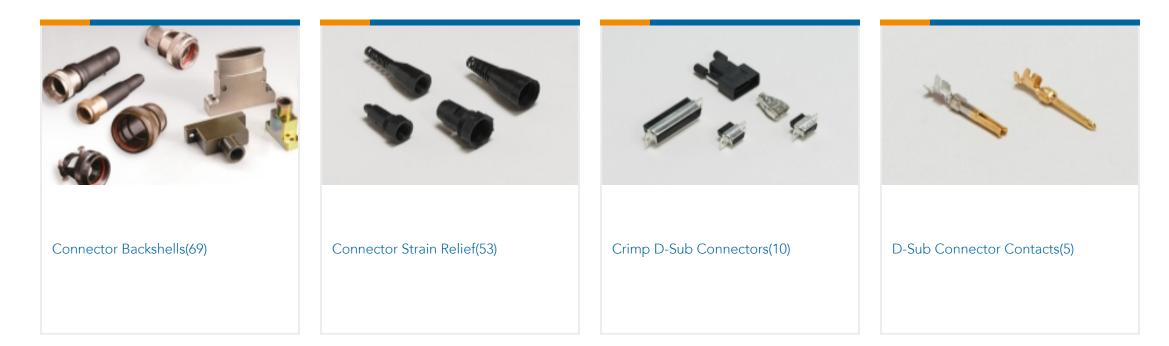


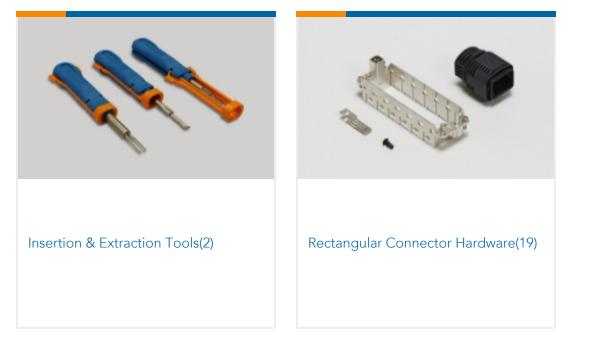

Customers Also Bought

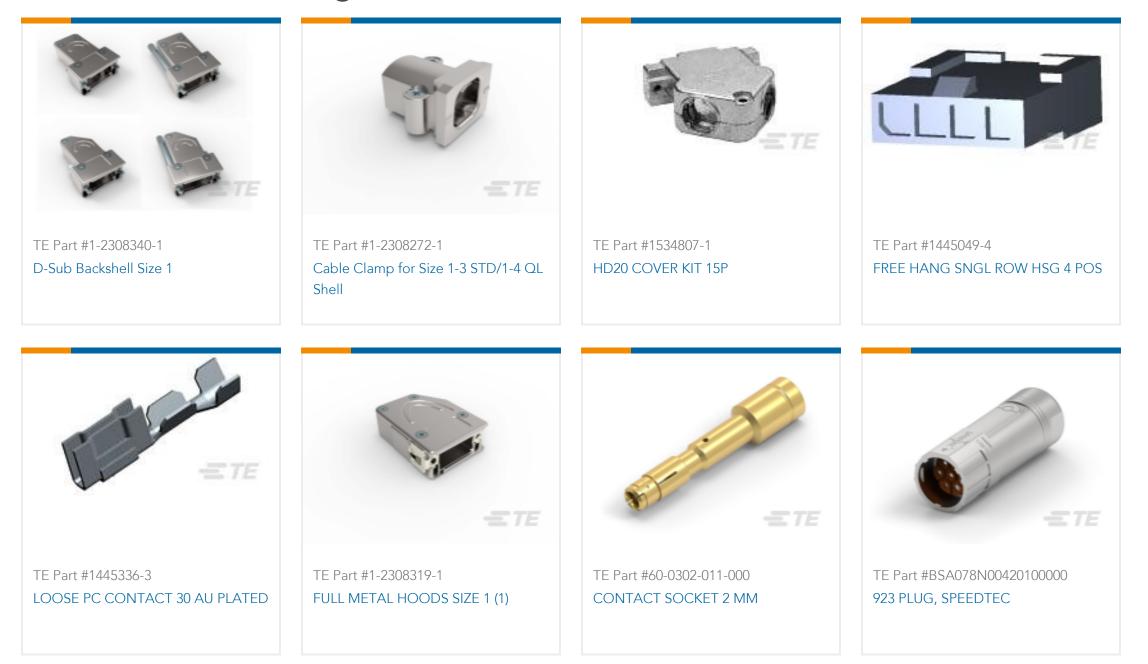

Documents

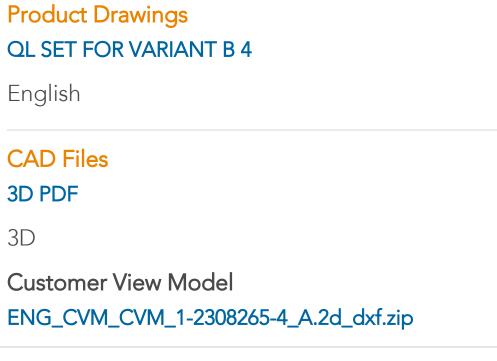

1-2308265-4

Rectangular Connector Hardware, Quick Lock Pins, -40 – 90 °C [-40 – 194 °F], Rail D-Sub Backshells



English

Customer View Model ENG_CVM_CVM_1-2308265-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2308265-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Rail D-Sub Backshells Flyer

English