


RAST | RAST 5 IDC Connectors

TE Internal #: 1-282047-1 Standard Edge Connectors, Wire-to-Board, 7 Position, .196 in [5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, RAST 5 IDC Connectors

View on TE.com >

Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors

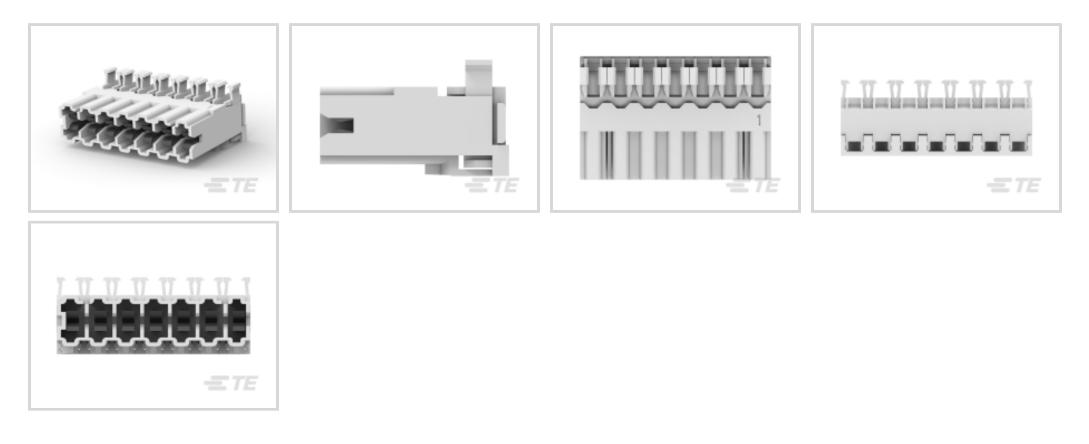

Connector System: Wire-to-Board

Number of Positions: 7

Centerline (Pitch): 5 mm [.196 in]

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Number of Rows: 1

Features

Connectivity

Product Type Features

Connector System	Wire-to-Board				
Connector & Housing Type	Receptacle				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Card Entry Style	Side				
Number of Positions	7				
Number of Rows	1				
Connector Contact Load Condition	Fully Loaded				
Electrical Characteristics					
Operating Voltage	220 VAC				
Body Features					
Primary Product Color	Natural				
Contact Features					

Standard Edge Connectors, Wire-to-Board, 7 Position, .196 in [5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, RAST 5 IDC Connectors



PCB Contact Termination Area Plating Material Thickness	2 μm[78.74 μin]		
Contact Type	Receptacle		
Contact Mating Area Plating Material Thickness	2 μm[78.74 μin]		
Contact Mating Area Plating Material	Tin		
PCB Contact Termination Area Plating Material	Tin		
Contact Base Material	Brass		
Contact Current Rating (Max)	6 A		
Termination Features			
Termination Method to Wire & Cable	Insulation Displacement (IDC)		
Mechanical Attachment			
Mating Alignment Type	Polarizing Slot		
Mating Alignment	With		
Connector Mounting Type	Cable Mount (Free-Hanging)		
Housing Features			
Centerline (Pitch)	5 mm[.196 in]		
Housing Material	Polyamide 6.6 GF		

Dimensions

Compatible Insulation Diameter Range	2 – 2.8 mm[.078 – .11 in]				
Wire Size	.5 – .75 mm²				
Usage Conditions					
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]				
Operation/Application					
Circuit Application	Power				
Industry Standards					
Agency/Standard	UL				
UL Flammability Rating	UL 94V-2				
Packaging Features					
Packaging Quantity	455				
Packaging Method	Tray				

Product Compliance

For compliance documentation, visit the product page on TE.com>

Standard Edge Connectors, Wire-to-Board, 7 Position, .196 in [5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, RAST 5 IDC Connectors



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Standard Edge Connectors, Wire-to-Board, 7 Position, .196 in [5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, RAST 5 IDC Connectors






Also in the Series | RAST 5 IDC Connectors



PCB Headers & Receptacles(417)	Rectangular Connector Housings(1)	Standard Edge Connectors(34)	Standard Rectangular Connectors(68)

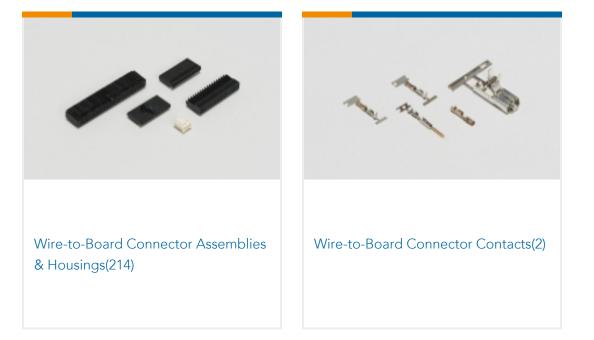

Customers Also Bought



Standard Edge Connectors, Wire-to-Board, 7 Position, .196 in [5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, RAST 5 IDC Connectors







Documents

Product Drawings AMP MONO-SHAPE P.C.B.CONN7P.GL

English

CAD Files **Customer View Model** ENG_CVM_CVM_1-282047-1_U.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-282047-1_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-282047-1_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications Application Specification

English