1-292187-2 - ACTIVE

CT Hybrid Drawer TE Internal #: 1-292187-2 Connector Assembly, Plug, Wire-to-Wire, 8 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Power & Signal, CT Hybrid Drawer

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Connector Assembly

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 8

Centerline (Pitch): 2 mm [.079 in ]

### Features

### Product Type Features

Connector Product Type

Connector & Housing Type

Connector Assembly

Plug



| Connector System                      | Wire-to-Wire    |
|---------------------------------------|-----------------|
| Sealable                              | No              |
| Connector & Contact Terminates To     | Wire & Cable    |
| Configuration Features                |                 |
| Number of Power Positions             | 3               |
| Number of Signal Positions            | 5               |
| Number of Positions                   | 8               |
| Number of Rows                        | 1               |
| Electrical Characteristics            |                 |
| Termination Resistance                | 8 mΩ            |
| Dielectric Withstanding Voltage (Max) | 1800 VAC        |
| Insulation Resistance                 | 100 MΩ          |
| Operating Voltage                     | 250 VAC         |
| Body Features                         |                 |
| Drawer Style                          | Miniature Power |
|                                       |                 |

Connector Assembly, Plug, Wire-to-Wire, 8 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Power & Signal, CT Hybrid Drawer



| Primary Product Color              | Black                      |
|------------------------------------|----------------------------|
| Contact Features                   |                            |
| Contact Layout                     | Inline                     |
| Contact Type                       | Pin                        |
| Contact Base Material              | Copper Alloy               |
| Contact Current Rating (Max)       | 15 A                       |
| Termination Features               |                            |
| Termination Method to Wire & Cable | Crimp                      |
| Mechanical Attachment              |                            |
| Strain Relief                      | Without                    |
| Panel Mount Feature                | With                       |
| PCB Mount Retention                | Without                    |
| Panel Mount Feature Type           | Mounting Ears              |
| Mating Retention                   | Without                    |
| Connector Mounting Type            | Cable Mount (Free-Hanging) |
| Housing Features                   |                            |
| Housing Material                   | Thermoplastic              |

## Centerline (Pitch)

## 2 mm[.079 in]

| Dimensions                           |                               |
|--------------------------------------|-------------------------------|
| Connector Length                     | 47.5 mm[1.87 in]              |
| Connector Height                     | 15 mm[.591 in]                |
| Connector Width                      | 39.62 mm[1.56 in]             |
|                                      | 1.87 in                       |
| Compatible Insulation Diameter Range | 1.4 – 2.4 mm[.055 – .094 in]  |
| Wire Size                            | .2 – 1.25 mm <sup>2</sup>     |
| Usage Conditions                     |                               |
| Operating Temperature Range          | -30 – 105 °C[-22 – 221 °F]    |
| Operation/Application                |                               |
| Circuit Application                  | Power & Signal                |
| Industry Standards                   |                               |
| Glow Wire Rating                     | Standard Part - Not Glow Wire |
| UL Flammability Rating               | UL 94V-0                      |

**C** For support call+1 800 522 6752

Connector Assembly, Plug, Wire-to-Wire, 8 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Power & Signal, CT Hybrid Drawer



### Packaging Features

| Packaging Quantity  | 200   |
|---|---|
| Packaging Method  | Tray  |
| Other   |   |
| Discrete Wire Connector Comment   | Mating Connector - 2-292190-2   |
| Product Compliance<br>For compliance documentation, visit the product page on TE.com> |   |
| EU RoHS Directive 2011/65/EU  | Compliant   |
| EU ELV Directive 2000/53/EC   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016   | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006  | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content   | Not Low Halogen - contains Br or Cl > 900<br>ppm.   |
|   |   |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Connector Assembly, Plug, Wire-to-Wire, 8 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Power & Signal, CT Hybrid Drawer






# Also in the Series | CT Hybrid Drawer

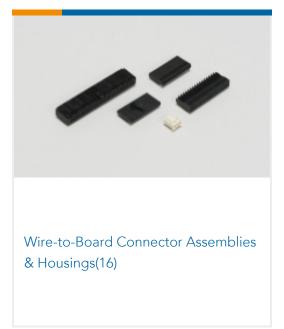

# Customers Also Bought

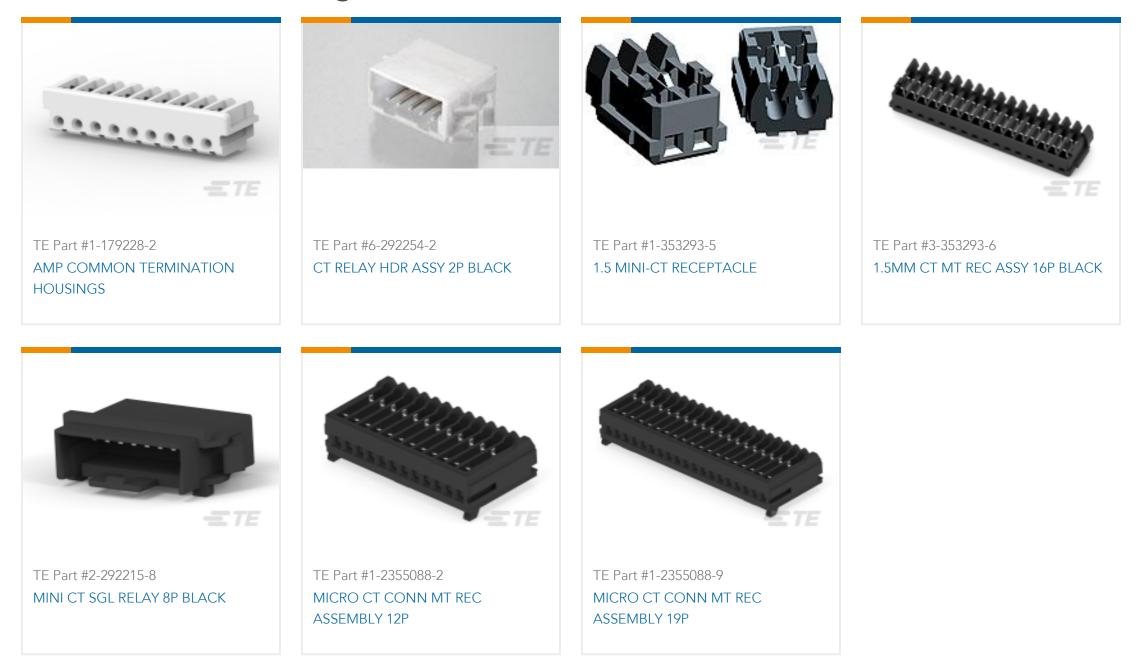

### Documents

### Product Drawings PLUG ASS'Y OF HYB SF DRAWER8P

English

### **CAD** Files

3D PDF

English

**S** For support call+1 800 522 6752

Connector Assembly, Plug, Wire-to-Wire, 8 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Black, Wire & Cable, Power & Signal, CT Hybrid Drawer



Customer View Model

ENG\_CVM\_1-292187-2\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_1-292187-2\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_1-292187-2\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages POWER\_CONNECTORS\_CATALOG\_SEC02\_CABLE\_MOUNTED

English

Low Power Drawer Connectors QRG

English

**Product Specifications** 

**Application Specification** 

English

Crimping Hybrid Mini Drawer Connector Power Line Contact

English

Product Environmental Compliance Product Compliance

English

**Product Compliance** 

English