1-5227161-6 - ACTIVE

TE Internal #: 1-5227161-6 BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount

View on TE.com >



Connectors > RF Connectors > Coax Connectors > BNC RF Connector: Male (Jack), Right Angle



RF Interface: BNC

RF Connector Style: Jack

RF Connector Mated Outer Diameter (Approximate): 14.53 mm [.572 in]

Impedance: 50Ω

RF Connector Coupling Mechanism: Bayonet

All BNC RF Connector: Male (Jack), Right Angle (42)

Features

Product Type Features

Connector ShapeCircularConnector Product TypeConnector Kit

RF Interface	BNC
RF Connector Style	Jack
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Right Angle
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
EMI & RFI Protection & Suppression Type	PCB Ground
Impedance	50 Ω
Body Features	
Body Material	Polyester, PBT
Contact Features	

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



RF Connector Center Contact Underplating Material	Nickel	
	30 µin	
RF Connector Center Contact Plating Material	Gold	
RF Connector Center Contact Material	Phosphor Bronze	
Termination Features		
Termination Post & Tail Length	4.11 mm[.162 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Panel Attachment Style	Rear Mount	
PCB Mount Retention	With	
Panel Mount Feature Type	Lockwasher and Nut	
RF Connector Coupling Mechanism	Bayonet	
Connector Mounting Type	Panel Mount	
RF Contact Captivation Method	Solder	
Detent	With	
Housing Features		

Housing Color

Black

Dimensions

Mounting Post Length	3.48 mm[.137 in]	
Profile Height from PCB	15.88 mm[.625 in]	
RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]	
Usage Conditions		
Insulation Option	Uninsulated	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]	
Operation/Application		
Operating Frequency	4 GHz	
Packaging Features		
Packaging Method	Package	
Other		
Lockwasher Material	Phosphor Bronze	
Coupling Nut Base Material	Brass	
Additional Features	Hardware Included	

C For support call+1 800 522 6752

BNC RF Interface, Jack, 50 Ω , Bayonet, 4 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



Grade	Commercial	
Dielectric Material	Polymethylpentene	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.7% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Wave solder capable to 265°C	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount





Customers Also Bought

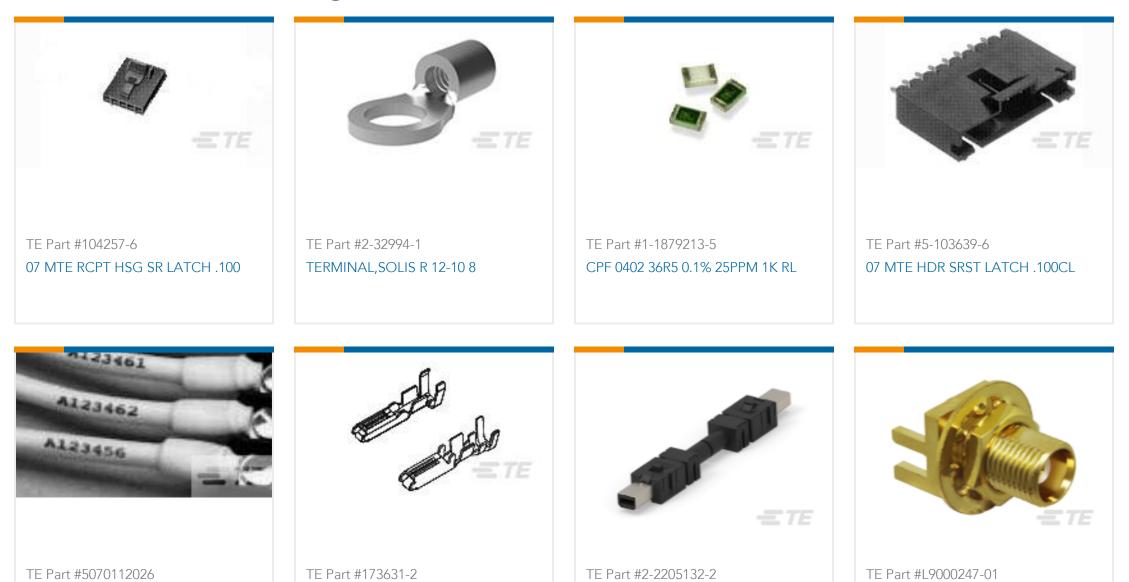

RNF-100-1-1/2-X-STK	070 REC CONTRACT 20-16	CA MINI IO MINI IO TYPE II	MCX Jack 50 Ohm .062 PCB Edge Mount
TE Part #86509-000			
FLS801-51 LIQUID LEVEL SENSOR			
Documents			
CAD Files			
3D PDF			
3D			
Customer View Model			
ENG_CVM_CVM_1-5227161	-6_B.2d_dxf.zip		

English

Customer View Model

ENG_CVM_CVM_1-5227161-6_B.3d_igs.zip

English

BNC RF Interface, Jack, 50 Ω, Bayonet, 4 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



Customer View Model

ENG_CVM_CVM_1-5227161-6_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Product Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English