1-66564-3 - ACTIVE

AMP | AMP Type III+ TE Internal #: 1-66564-3 Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+ View on TE.com >



Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact

Contact Mating Area Plating Material: Tin

Wire Size: .2 – .6 mm²

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

Power Contact Type	Contact				
Connector & Contact Terminates To	Wire & Cable				
Contact Features					
Contact Size	Size 16				
Barrel Type	Open				
Contact Mating Area Plating Material	Tin				
Contact Current Rating (Max)	13 A				
Contact Type	Pin				
Contact Retention Within Housing	With				
Mating Pin Diameter	1.57 mm[.062 in]				
Contact Base Material	Brass				
Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]				
Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]				
Wire Contact Termination Area Plating Material	Tin				
Wire Contact Termination Area Plating Material Finish	Matte				

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



Contact Orientation	Straight				
Contact Underplating Material	Nickel				
Contact Underplating Material Thickness	1.27 μm[50 μin]				
Termination Features					
Termination Method to Wire & Cable	Crimp				
Mechanical Attachment					
Wire Insulation Support	With				
Dimensions					
Wire Size	.2 – .6 mm²				
Compatible Insulation Diameter Range	1.52 – 3.05 mm[.06 – .12 in]				
Usage Conditions					
Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]				
Operation/Application					
Circuit Application	Power & Signal				
	Power & Signal				
Circuit Application	Power & Signal Yellow				

Packaging Features

Packaging Quantity	4000					
Packaging Method	Reel					
Other						
Power Connectors Comment	Contacts can only be used in Metrimate, Series 1 (Arr. 23-24), Series 4 (Arr. 23-13M, 23-16M, 23-22M), and VDE connectors.					
Product Compliance For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant					
EU ELV Directive 2000/53/EC	Compliant					
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold					
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC					

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



INSERTION TOOL CONT	EXTRACT TOOL TYPE 2 20-16	CCII TYPE III+ PIN SKT 24-22 ASSY	EXTRACTION TOOL


Also in the Series AMP Type III+

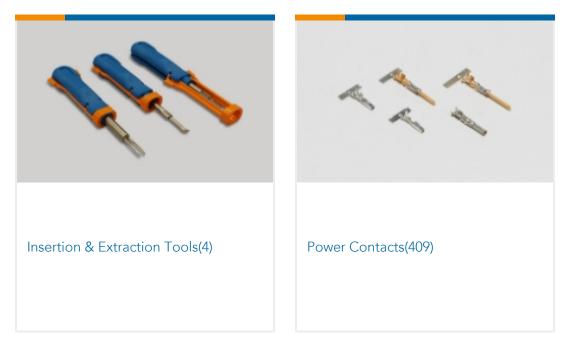

Customers Also Bought

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



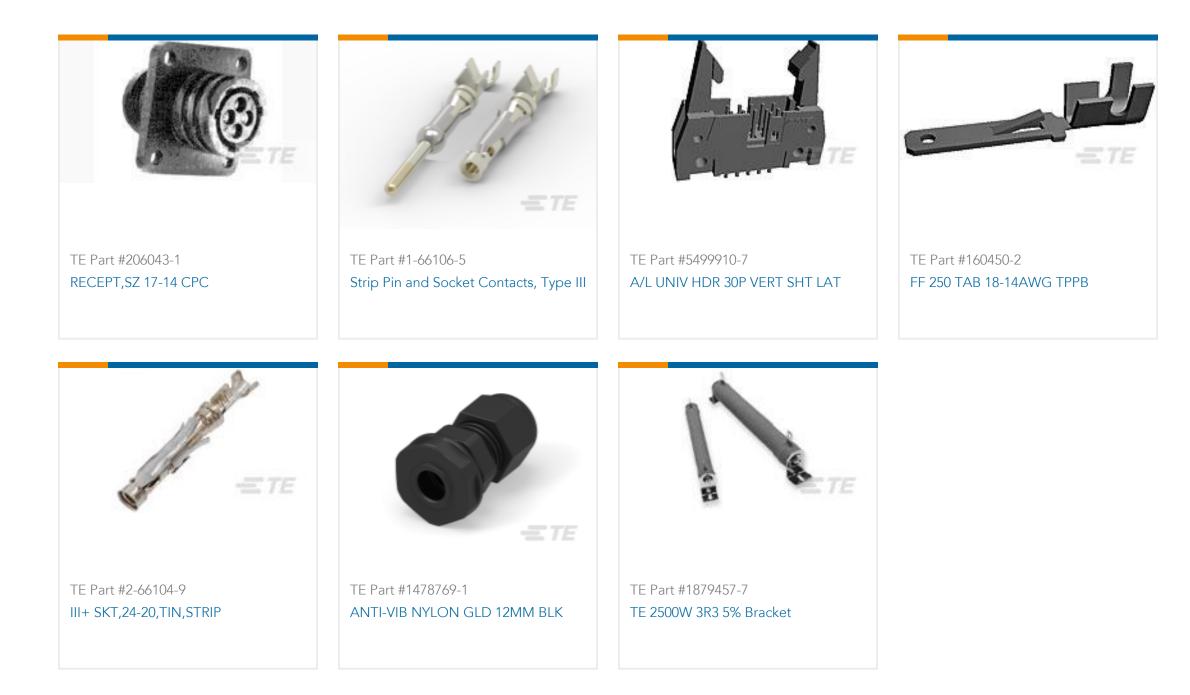

Documents

Product Drawings III+PIN,24-20,TIN,STRIP

English

CAD Files Customer View Model ENG_CVM_CVM_1-66564-3_AC.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-66564-3_AC.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-66564-3_AC.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications
Application Specification

English

Product Environmental Compliance Product Compliance Document

English

Product Compliance Document

English

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+

