

1-964575-3 ✓ ACTIVE




RAST

TE Internal #: 1-964575-3

PCB Connector Mounting, 3 Position, .098 in [2.5 mm] Centerline,  
Black, Printed Circuit Board, -40 – 221 °F [-40 – 105 °C]

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Connector Accessories > PCB Connector Hardware > PCB Connector Mounting

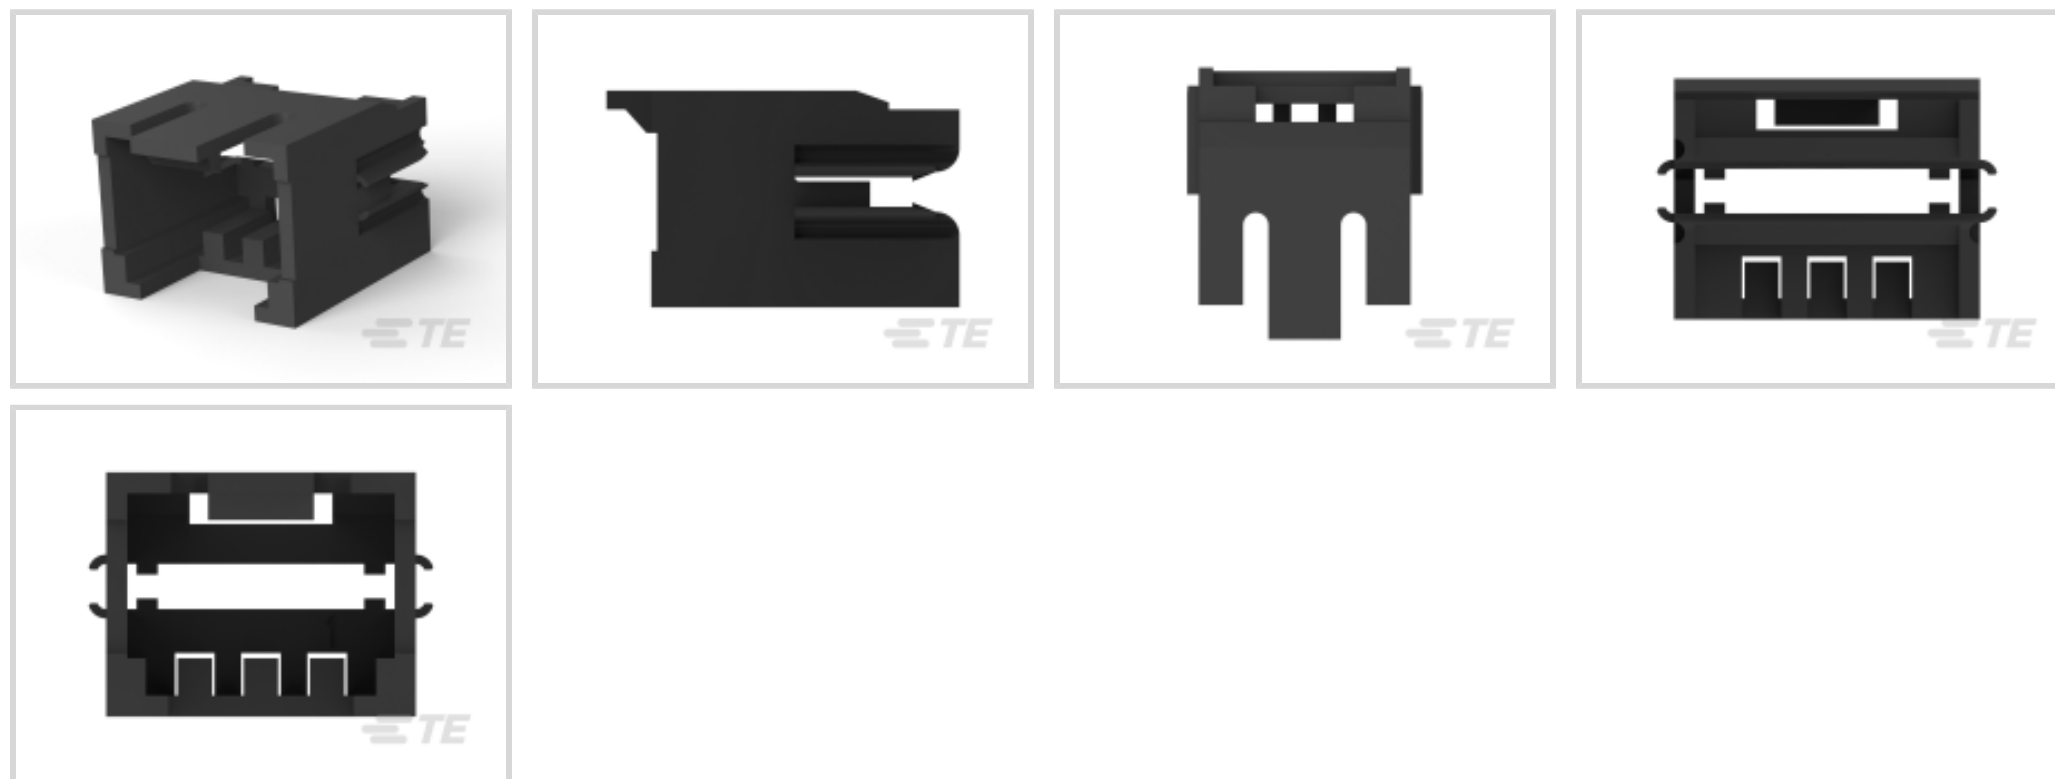

Number of Positions: 3

Centerline (Pitch): 2.5 mm [.098 in ]

Primary Product Color: **Black**

Connector & Contact Terminates To: **Printed Circuit Board**

Operating Temperature Range: -40 – 105 °C [-40 – 221 °F]

**Features**

**Product Type Features**

Connector & Contact Terminates To	Printed Circuit Board
-----------------------------------	-----------------------

**Configuration Features**

Number of Positions	3
---------------------	---

**Body Features**

Primary Product Color	Black
-----------------------	-------

**Housing Features**

Centerline (Pitch)	2.5 mm[.098 in]
--------------------	-----------------

**Dimensions**

PCB Thickness (Recommended)	1.5 mm[.059 in]
-----------------------------	-----------------

**Usage Conditions**

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

**Industry Standards**

UL Flammability Rating	UL 94V-0
------------------------	----------

## Packaging Features

Packaging Quantity	7000
Packaging Method	Carton

## Product Compliance





[For compliance documentation, visit the product page on TE.com>](#)


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts

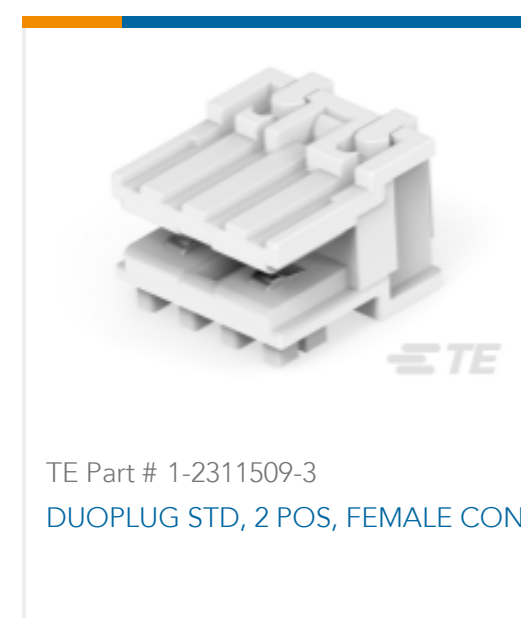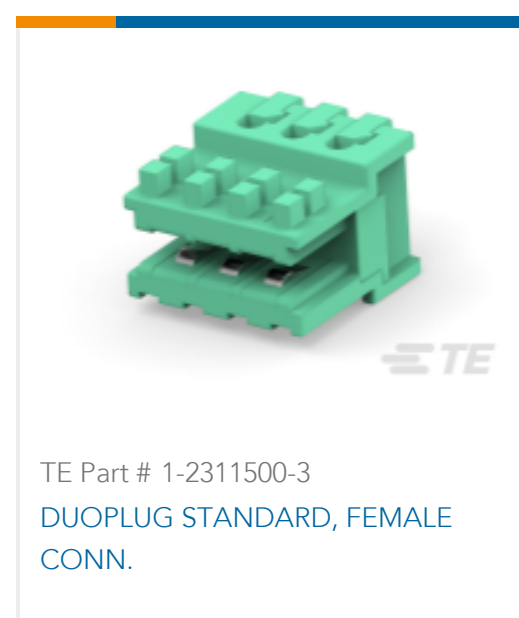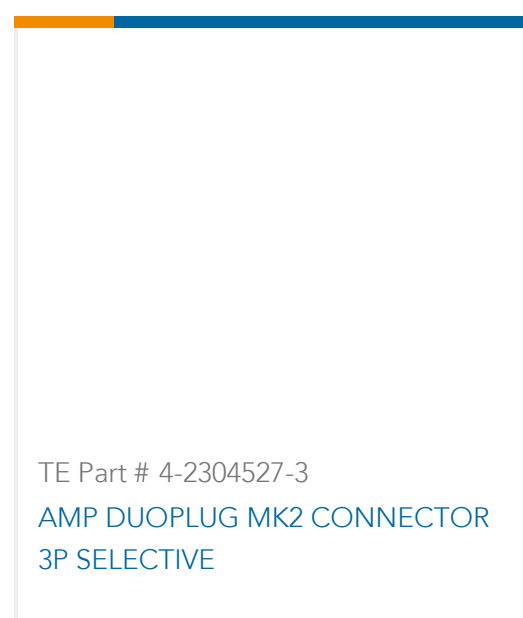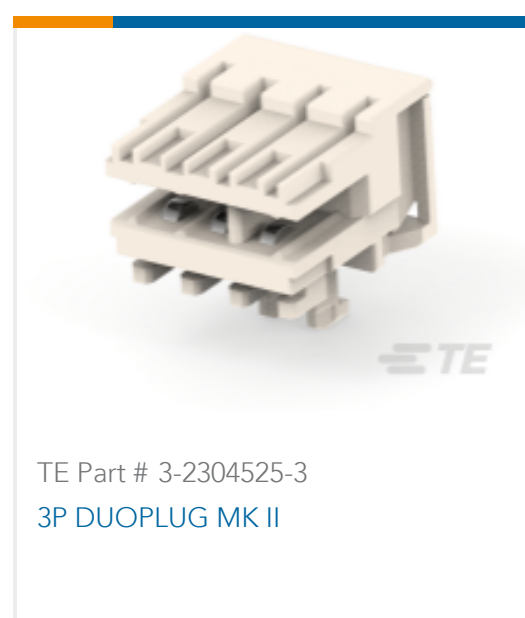

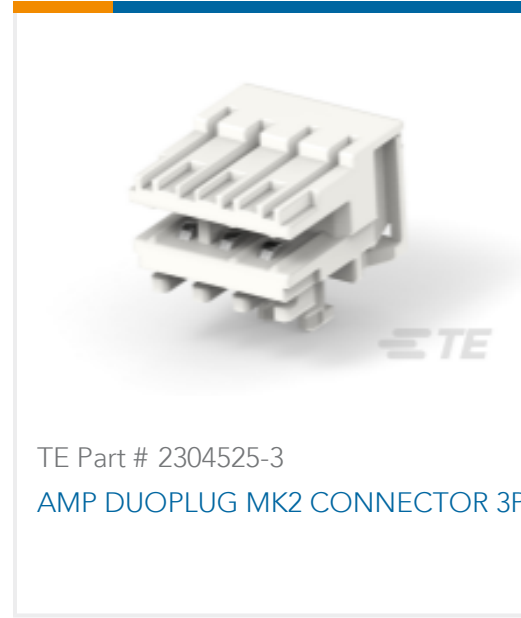

### Customers Also Bought



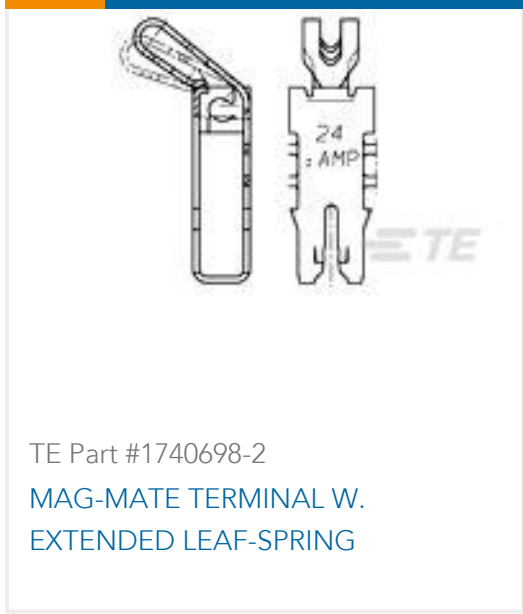

## Documents

### CAD Files

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1-964575-3\\_C.2d\\_dxf.zip](#)

English

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1-964575-3\\_C.3d\\_igs.zip](#)

English

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1-964575-3\\_C.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[1654742\\_HOUSEHOLD\\_APPLIANCES\\_RAST5](#)

English

### Product Specifications

[Product Specification](#)

English

### Product Environmental Compliance

[TE Material Declaration](#)

English

### Agency Approvals

[Agency Approval Document](#)

1-964575-3

PCB Connector Mounting, 3 Position, .098 in [2.5 mm] Centerline, Black, Printed  
Circuit Board, -40 – 221 °F [-40 – 105 °C]



English