
1-966194-3 - ACTIVE

RAST

TE Internal #: 1-966194-3 Standard Edge Connectors, Wire-to-Board, 3 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, PBTP, Fully Loaded

View on TE.com >

Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors

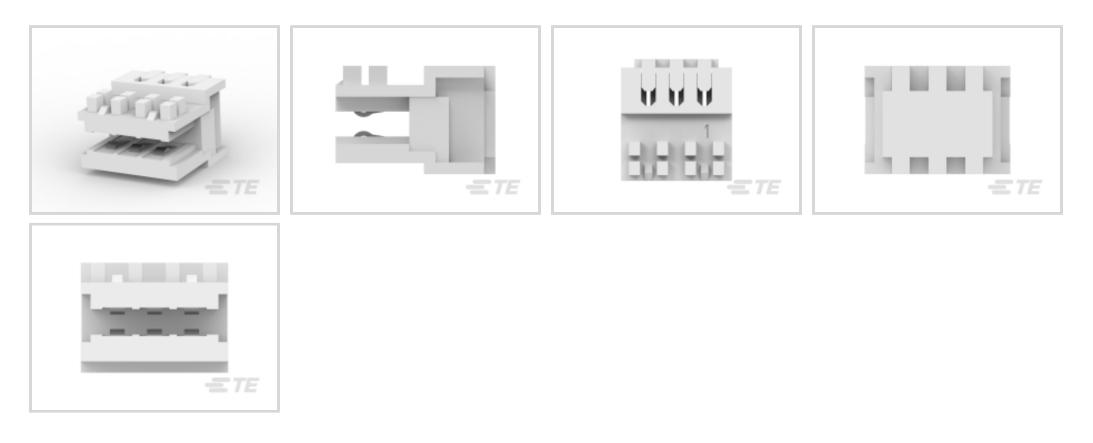

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 2.5 mm [.098 in]

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Number of Rows: 1

Features

connectivity

Product Type Features

Connector System	Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Card Entry Style	Side
Number of Insulation Displacement Slots	3
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	3
Number of Positions Number of Rows	3 1
Number of Rows	1
Number of Rows Connector Contact Load Condition	1 Fully Loaded
Number of Rows Connector Contact Load Condition PCB Mount Orientation	1 Fully Loaded

Standard Edge Connectors, Wire-to-Board, 3 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, PBTP, Fully Loaded



Primary Product Color	Natural
Contact Features	
Contact Retention Within Housing	Without
Contact Type	Socket
Contact Mating Area Plating Material Thickness	5 – 12 µm
Contact Mating Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	2 A
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Retention	Without
Mating Alignment	With
PCB Mount Alignment	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Entry Configuration	Both Ends Open
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBTP
Dimensions	
Card Slot Depth	5 mm[.2 in]
Connector Height	7.35 mm[.29 in]
PCB Thickness (Recommended)	1.5 mm[.059 in]
Compatible Insulation Diameter Range	1.3 mm[.051 in]
Wire Size	.35 mm²
Usage Conditions	
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	

Standard Edge Connectors, Wire-to-Board, 3 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, PBTP, Fully Loaded



Packaging Quantity	4480
Packaging Method	Carton
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

TE Part # 1-2403118-3 Same as 1-966194-3 w/ alternative resin

Customers Also Bought

C For support call+1 800 522 6752

Standard Edge Connectors, Wire-to-Board, 3 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, PBTP, Fully Loaded







Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-966194-3_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-966194-3_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-966194-3_D.3d_stp.zip

English

Customer View Model

ENG_CVM_1-966194-3_C1.2d_dxf.zip

English

Customer View Model

ENG_CVM_1-966194-3_C1.3d_igs.zip

English

Standard Edge Connectors, Wire-to-Board, 3 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Natural, PBTP, Fully Loaded



Customer View Model

ENG_CVM_1-966194-3_C1.3d_stp.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals Agency Approval Document

English