1-967627-2 - ACTIVE


# AMP | Timer Connector System

TE Internal #: 1-967627-2 Housing for Male Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Yellow, Signal, Panel Mount, Timer Connector System

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing

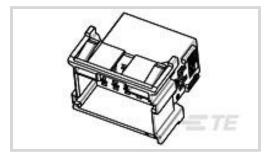

Connector System: Wire-to-Wire

Number of Positions: **12** 

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5 mm [.197 in ]

Sealable: No

All Timer Connector Housing (585)

# Features

### **Product Type Features**

Mixed & Hybrid Connector

Connector Shape

No

Rectangular

Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	12
Number of Rows	3
Electrical Characteristics	
Operating Voltage	28 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Yellow
Connector & Keying Code	A

Housing for Male Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Yellow, Signal, Panel Mount, Timer Connector System



### **Contact Features**

Contact Size	2.8mm
Contact Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
	PAGF
Housing Features	PA GF 5 mm[.197 in]
Housing Material	
Housing Features Housing Material Centerline (Pitch)	
Housing Features Housing Material Centerline (Pitch) Dimensions	5 mm[.197 in]

# Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Bag
Other	
Serviceable	No
Connector Position Assurance Capable	No

# Product Compliance

For compliance documentation, visit the product page on TE.com>

Housing for Male Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Yellow, Signal, Panel Mount, Timer Connector System



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**





Also in the Series | Timer Connector System

Housing for Male Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Yellow, Signal, Panel Mount, Timer Connector System



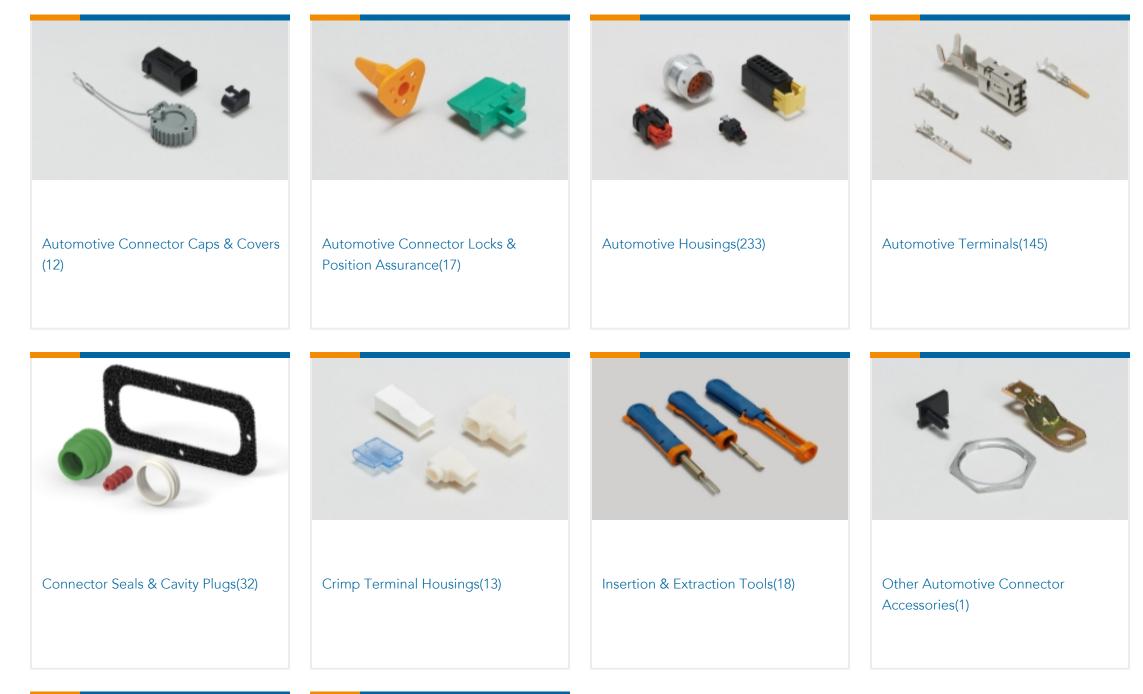





PCB Headers & Receptacles(82)

Quick Disconnects(4)

# Customers Also Bought





# Documents

Housing for Male Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Yellow, Signal, Panel Mount, Timer Connector System



Product Drawings

FLACHSTE-GEH2,8 12P

English

FLACHSTE-GEH2,8 12P

English

# **CAD** Files

## 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-967627-2\_D.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_1-967627-2\_D.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-967627-2\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Timer Interconnection System

English

**Product Specifications** 

Application Specification

English