

MotorMan

TE Internal #: 1103426-2

Circular Connector Contact Inserts, Pin, 4, Wire-to-Wire, 4 Position, Cable Mount (Free-Hanging), -4 – 176 °F [-20 – 80 °C], MotorMan

View on TE.com >



Connectors > Circular Connectors > Circular Connector Contact Inserts









Cable Mount (Free-Hanging)



Circular Connector Insert Type: Pin

Pole Configuration: 4

Connector System: Wire-to-Wire

Number of Positions: 4

Connector & Contact Terminates To: Wire & Cable

Features

| Product Type Features | |
|------------------------------------|----------------|
| Connector System | Wire-to-Wire |
| Connector & Contact Terminates To | Wire & Cable |
| Configuration Features | |
| Number of Positions | 4 |
| Body Features | |
| Primary Product Color | Gray |
| Circular Connector Insert Type | Pin |
| Contact Features | |
| Pole Configuration | 4 |
| Contact Current Rating (Max) | 10 A |
| Termination Features | |
| Termination Method to Wire & Cable | Crimp Terminal |

Mechanical Attachment

Connector Mounting Type



Housing Features

| Housing Material | PBT GF10 |
|----------------------------------|--------------------------|
| Dimensions | |
| Wire Size | $.084 \text{ mm}^2$ |
| Usage Conditions | |
| Operating Temperature Range | -20 - 80 °C[-4 - 176 °F] |
| Operation/Application | |
| Compatible With Connector Series | Motorman |
| Circuit Application | Power & Signal |
| Packaging Features | |
| Packaging Quantity | 40 |
| Packaging Method | Carton |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|---|--|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Pb (3.5% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content | Not Yet Reviewed for halogen content |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



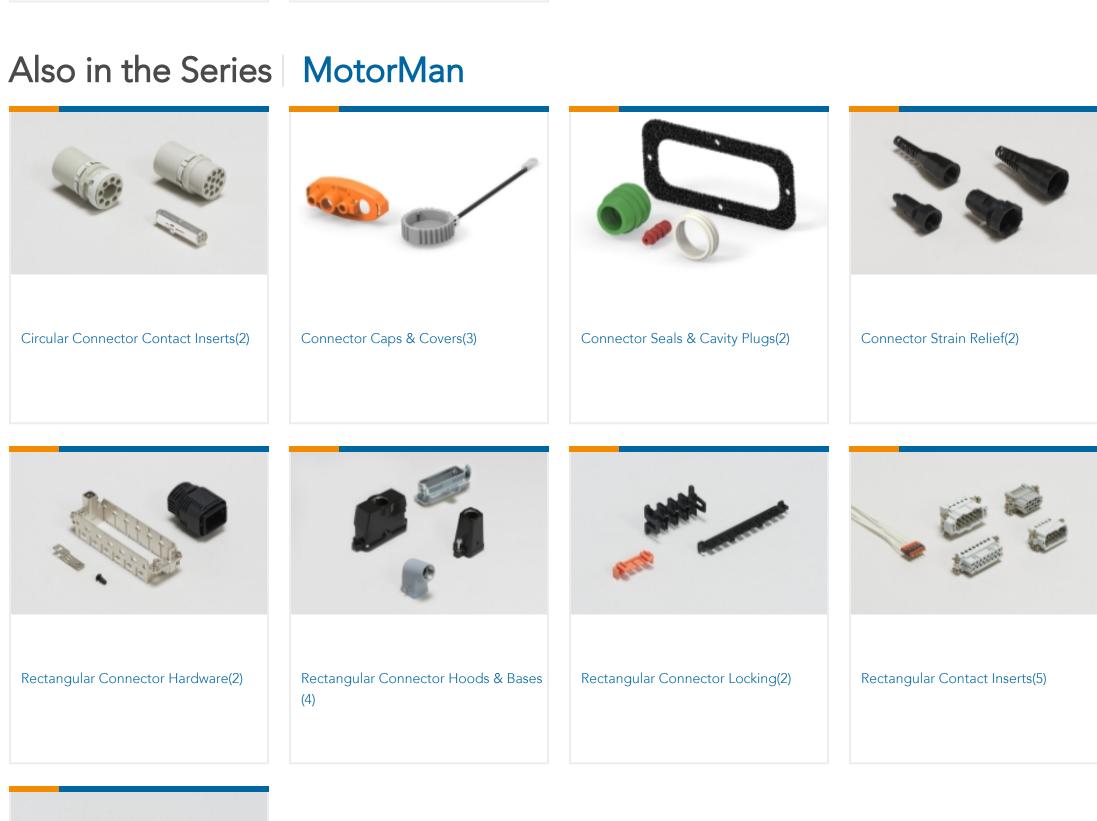



Customers Also Bought







TE Part #2295893-1 MALE INSERT HOUSING



TE Part #2295894-1 SIGNAL HOUSING















Documents

Product Drawings

MALE INSERT, CRIMP, 4-POS. 22DF CONTACTS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1103426-2_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1103426-2_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1103426-2_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Circular Connector Contact Inserts, Pin, 4, Wire-to-Wire, 4 Position, Cable Mount (Free-Hanging), -4 – 176 °F [-20 – 80 °C], MotorMan



Product Specification

English