
1247003-2 - ACTIVE

MAG-MATE

TE Internal #: 1247003-2 Magnet Wire Terminals, Multispring Pin, .63 – .85 mm Magnet Wire, 22 – 19.5 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE

View on TE.com >

Terminals & Splices > Magnet Wire Terminals

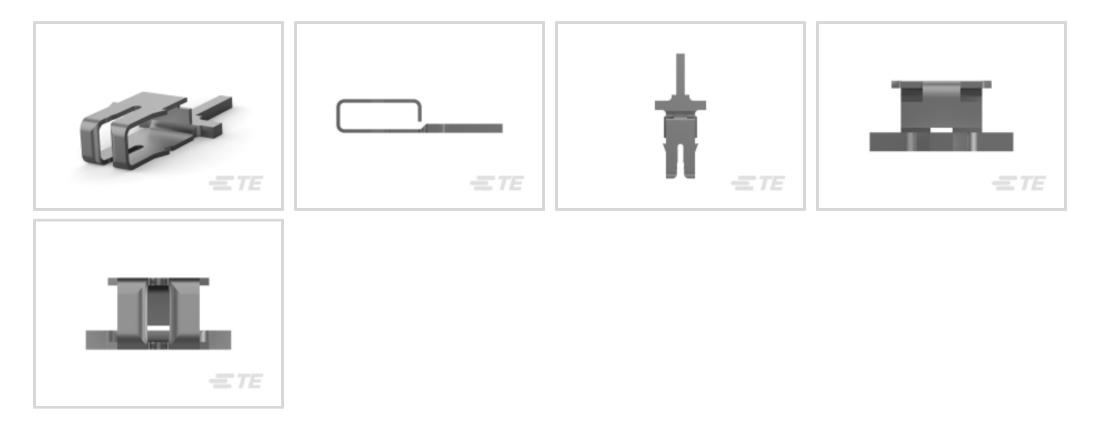

Magnet Wire Terminal Type: Multispring Pin

Mating Pin Diameter: .8 mm [.031 in]

Stock Thickness (Magnet Wire Side)

Product Length

Usage Conditions

Magnet Wire Size: .63 – .85 mm

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Features



| Product Type Features | |
|------------------------------------|-------------------------------|
| Compatible With Discrete Wire Type | Magnet Wire, Solid |
| Contact Features | |
| Magnet Wire Terminal Type | Multispring Pin |
| Mating Pin Diameter | .8 mm[.031 in] |
| Terminal Plating Material | Tin |
| Terminal Orientation | Straight |
| Termination Features | |
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
| Dimensions | |
| Terminal Height | 7.6 mm[.3 in] |
| Magnet Wire Size | .63 – .85 mm |

.32 mm[.013 in]

14.8 mm[.582 in]

C For support call+1 800 522 6752

09/20/2023 07:16PM | Page 1

Magnet Wire Terminals, Multispring Pin, .63 – .85 mm Magnet Wire, 22 – 19.5 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



| Insulation Option | Uninsulated |
|---|--|
| Operating Temperature Range | -65 – 150 °C[-85 – 302 °F] |
| Operation/Application | |
| Compatible With Wire Base Material | Copper |
| Packaging Features | |
| Packaging Method | Reel, Reel/Carton |
| For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU | Compliant |
| For compliance documentation, visit the product page on TE.com> | |
| | · |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | |
| | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Magnet Wire Terminals, Multispring Pin, .63 – .85 mm Magnet Wire, 22 – 19.5 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE








Also in the Series | MAG-MATE



Customers Also Bought

Magnet Wire Terminals, Multispring Pin, .63 – .85 mm Magnet Wire, 22 – 19.5 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



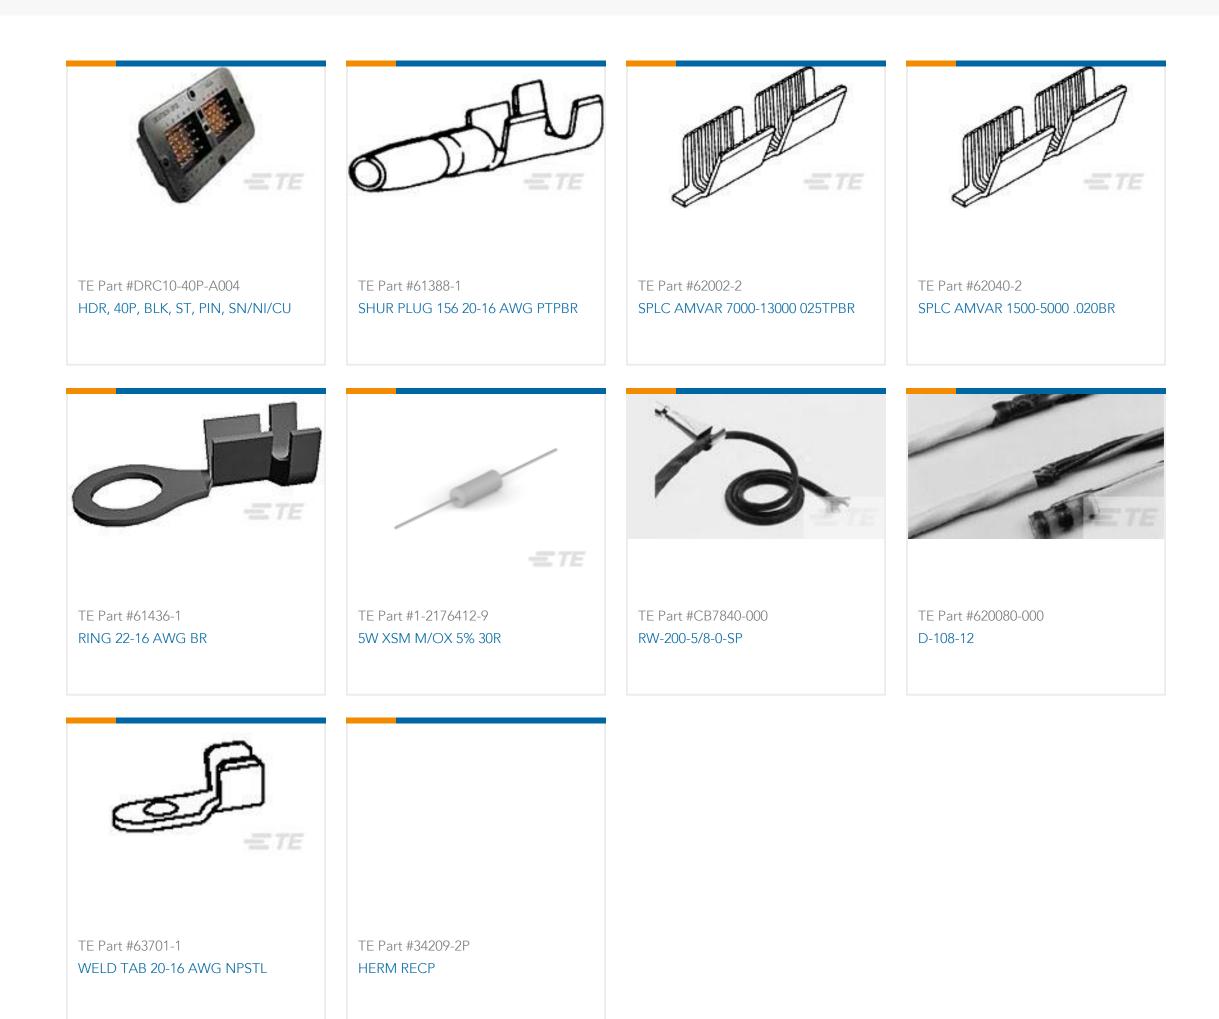

Documents

Product Drawings MAGMATE "300 SERIES" W/H MULTISPRING PIN

English

MAGMATE "300 SERIES" W/H MULTISPRING PIN

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1247003-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1247003-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1247003-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

C For support call+1 800 522 6752

Magnet Wire Terminals, Multispring Pin, .63 – .85 mm Magnet Wire, 22 – 19.5 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



Datasheets & Catalog Pages MAG-MATE Connector with Multispring-Japanese

Japanese

4-1773700-1MAG-MATE Connector with Multispring Pin-CN

4-1773700-2MAG-MATE Connector with Multispring-German

German

Product Specifications

Product Specification

English

Product Specification

English

Product Environmental Compliance
Product Compliance
English
Product Compliance
English