

SCHRACK | SCHRACK V23148

TE Internal #: 1393204-7

Power Relays, Standard, Bistable, 1 Coil, 1210 mW Coil Power Rating DC, 119 Ω Coil Resistance, 12 VDC Coil Voltage, 1 Form C

(CO), SCHRACK V23148

View on TE.com >



Relays, Contactors & Switches > Relays > Power Relays



Power Relay Type: Standard

Coil Magnetic System: Bistable, 1 Coil

Coil Power Rating DC: 1210 mW

Coil Resistance: 119Ω

Coil Voltage Rating: 12 VDC

Features

Product Type Features

| Power Relay Type | Standard |
|--|------------------|
| Electrical Characteristics | |
| Insulation Initial Dielectric Between Coil & Contact Class | 1500 – 2500 V |
| Insulation Initial Dielectric Between Open Contacts | 1000 Vrms |
| Contact Limiting Making Current | 12 A |
| Insulation Creepage Class | 1.5 – 3 mm |
| Contact Limiting Continuous Current | 7 A |
| Coil Power Rating Class | 1000 – 1500 mW |
| Insulation Initial Dielectric Between Contacts & Coil | 2000 Vrms |
| Insulation Creepage Between Contact & Coil | 2.5 mm[.098 in] |
| Coil Magnetic System | Bistable, 1 Coil |
| Coil Power Rating DC | 1210 mW |
| Coil Resistance | 119 Ω |
| Coil Voltage Rating | 12 VDC |
| Contact Switching Voltage (Max) | 400 VAC |
| Contact Voltage Rating | 250 VAC |
| Body Features | |
| Product Weight | 9 g[.317 oz] |



Contact Features

| Contact Arrangement | 1 Form C (CO) |
|------------------------------|-----------------------|
| Contact Current Class | 5 – 10 A |
| Contact Current Rating (Max) | 7 A |
| Contact Material | AgNi90/10 |
| Contact Number of Poles | 1 |
| Relay Terminal Type | PCB-THT |
| Mechanical Attachment | |
| Relay Mounting Type | Printed Circuit Board |

Dimensions

| Length Class (Mechanical) | 20 – 25 mm |
|---|------------------|
| Insulation Clearance Class | 2.5 – 4 mm |
| Height Class (Mechanical) | 14 – 15 mm |
| Insulation Clearance Between Contact & Coil | 2.5 mm[.098 in] |
| Width Class (Mechanical) | 16 – 20 mm |
| Product Width | 16.2 mm[.638 in] |
| Product Length | 21.2 mm[.834 in] |
| Product Height | 14.9 mm[.587 in] |

Usage Conditions

| Environmental Ambient Temperature (Max) | 70 °C[158 °F] |
|---|---------------------------|
| Operating Temperature Range | -25 – 70 °C[-13 – 158 °F] |

Packaging Features

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |



| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC |
|-----------------|---|
| | Free |

Solder Process Capability

Wave solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | SCHRACK V23148

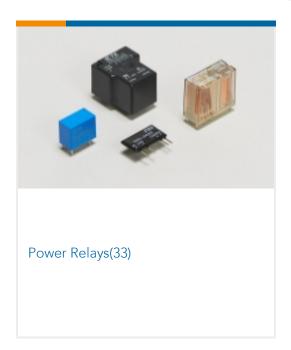

Customers Also Bought























Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393204-7_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1393204-7_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393204-7_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Power PCB Relay U/UB

English

Product Specifications

Power Relays, Standard, Bistable, 1 Coil, 1210 mW Coil Power Rating DC, 119 Ω Coil Resistance, 12 VDC Coil Voltage, 1 Form C (CO), SCHRACK V23148



Definitions General Purpose Relays

English