


SCHRACK

TE Internal #: 1393219-5 Power Relays, Standard, Monostable, DC, 200 mW Coil Power Rating DC, 405 Ω Coil Resistance, 9 VDC Coil Voltage, 1 Form C (CO)

View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays

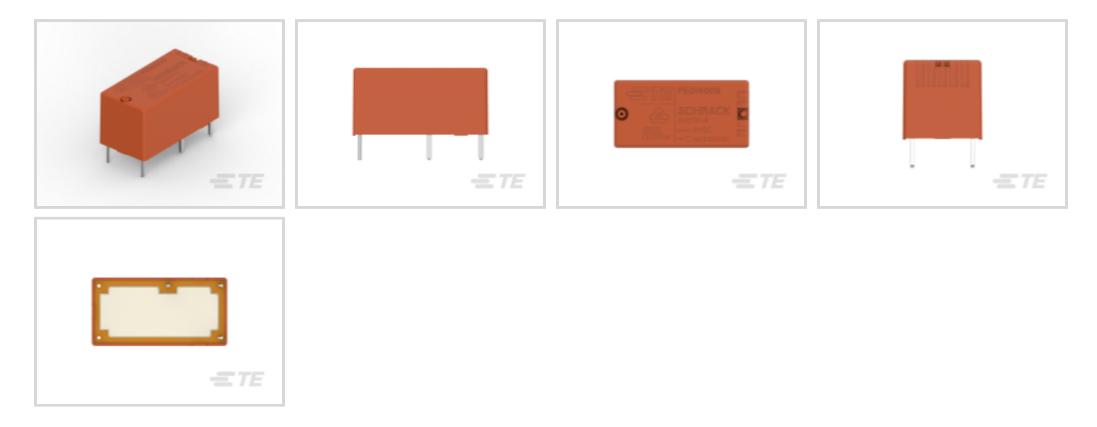

Power Relay Type: Standard

Coil Magnetic System: Monostable, DC

Coil Power Rating DC: 200 mW

Coil Resistance: 405 Ω

Coil Voltage Rating: 9 VDC

Features

connectivity

Product Type Features

Power Relay Type	Standard
Electrical Characteristics	
Coil Power Rating Class	200 – 300 mW
Coil Magnetic System	Monostable, DC
Coil Power Rating DC	200 mW
Coil Resistance	405 Ω
Coil Voltage Rating	9 VDC
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC
Contact Features	
Contact Arrangement	1 Form C (CO)
Contact Current Class	5 – 10 A, 16 A
Contact Current Rating (Max)	5 A
Contact Material	AgNi90/10

1393219-5

Power Relays, Standard, Monostable, DC, 200 mW Coil Power Rating DC, 405 Ω Coil Resistance, 9 VDC Coil Voltage, 1 Form C (CO)



Contact Number of Poles	1
Relay Terminal Type	PCB-THT
Mechanical Attachment	
Relay Mounting Type	Printed Circuit Board
Packaging Features	
Packaging Method	Box & Tube, Carton
EU RoHS Directive 2011/65/EU	Compliant
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE
	2023 (235) Does not contain REACH SVHC
Halogen Content	

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


1393219-5

Power Relays, Standard, Monostable, DC, 200 mW Coil Power Rating DC, 405 Ω Coil Resistance, 9 VDC Coil Voltage, 1 Form C (CO)





Customers Also Bought

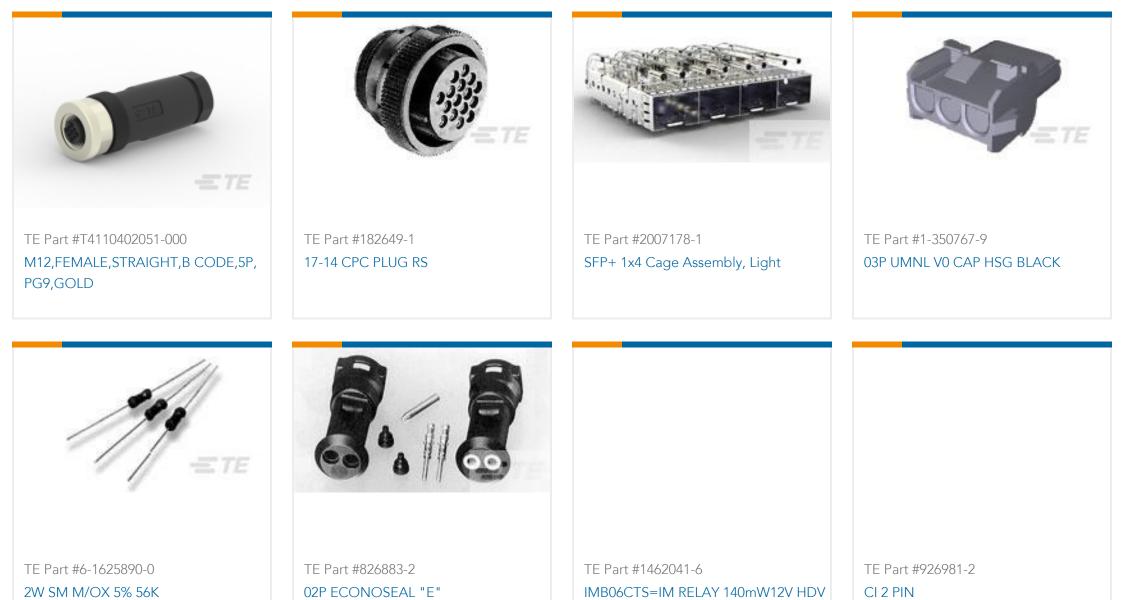

CAD Files

Customer View Model

ENG_CVM_CVM_1393219-5_C2.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393219-5_C2.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1393219-5_C2.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

Miniature PCB Relay PE

English

S For support call+1 800 522 6752

1393219-5

Power Relays, Standard, Monostable, DC, 200 mW Coil Power Rating DC, 405 Ω Coil Resistance, 9 VDC Coil Voltage, 1 Form C (CO)



Product Specifications Definitions General Purpose Relays

English

Agency Approvals VDE Certificate

English