
# 1445049-9 - ACTIVE

### MATE-N-LOK | Micro MATE-N-LOK

TE Internal #: 1445049-9 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK

### View on TE.com >

#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

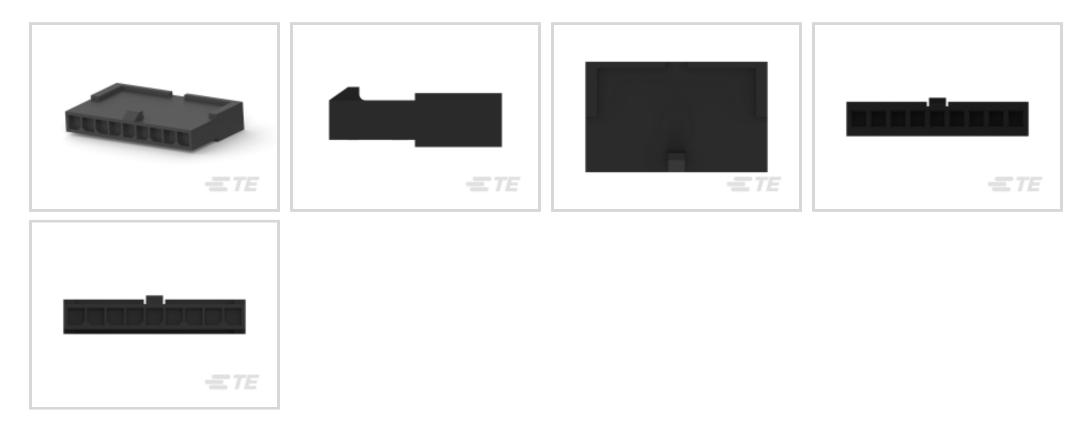

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 9

Centerline (Pitch): 3 mm [.118 in ]

## Features



### **Product Type Features**

| Rectangular Power Connector Type  | Housing      |  |  |  |  |  |  |  |
|-----------------------------------|--------------|--|--|--|--|--|--|--|
| Connector & Housing Type          | Plug         |  |  |  |  |  |  |  |
| Connector System                  | Wire-to-Wire |  |  |  |  |  |  |  |
| Sealable                          | No           |  |  |  |  |  |  |  |
| Connector & Contact Terminates To | Wire & Cable |  |  |  |  |  |  |  |
| Configuration Features            |              |  |  |  |  |  |  |  |
| Number of Positions               | 9            |  |  |  |  |  |  |  |
| Number of Rows                    | 1            |  |  |  |  |  |  |  |
| Electrical Characteristics        |              |  |  |  |  |  |  |  |
| Operating Voltage                 | 250 VDC      |  |  |  |  |  |  |  |
| Contact Features                  |              |  |  |  |  |  |  |  |
| Multiple Contact Types            | Without      |  |  |  |  |  |  |  |
| Contact Layout                    | Inline       |  |  |  |  |  |  |  |
| Contact Retention Within Housing  | Without      |  |  |  |  |  |  |  |

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



| Contact Type                         | Pin                           |
|--------------------------------------|-------------------------------|
| Termination Features                 |                               |
| Termination Method to Wire & Cable   | Crimp                         |
| Mechanical Attachment                |                               |
| Strain Relief                        | Without                       |
| Mating Alignment Type                | Polarization                  |
| Mating Retention                     | With                          |
| Mating Alignment                     | With                          |
| Mating Retention Type                | Locking Tab                   |
| Connector Mounting Type              | Cable Mount (Free-Hanging)    |
| Housing Features                     |                               |
| Centerline (Pitch)                   | 3 mm[.118 in]                 |
| Housing Color                        | Black                         |
| Housing Material                     | Nylon 66/6                    |
| Dimensions                           |                               |
| Compatible Insulation Diameter (Max) | 1.52 mm                       |
| Connector Height                     | 16.89 mm                      |
| Product Width                        | 3.86 mm                       |
| Product Length                       | 27.85 mm                      |
| Usage Conditions                     |                               |
| Operating Temperature Range          | -40 - 105 °C[-40 - 221 °F]    |
| Operation/Application                |                               |
| Circuit Application                  | Power & Signal                |
| Industry Standards                   |                               |
| CSA Rating                           | Certified, LR 7189            |
| UL Rating                            | Recognized                    |
| Agency/Standard                      | CNR, USR                      |
| Approved Standards                   | UL E28476, VDE 40005280       |
| UL Flammability Rating               | UL 94V-0                      |
| Glow Wire Rating                     | Standard Part - Not Glow Wire |

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



| Packaging Quantity  | 1000  |
|---|---|
| Packaging Method  | Tray  |
| Product Compliance<br>For compliance documentation, visit the product page on TE.com> |   |
| EU RoHS Directive 2011/65/EU  | Compliant   |
| EU ELV Directive 2000/53/EC   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016   | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006  | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content   | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free   |
| Solder Process Capability   | Not applicable for solder process capability  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**



# Also in the Series | Micro MATE-N-LOK

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



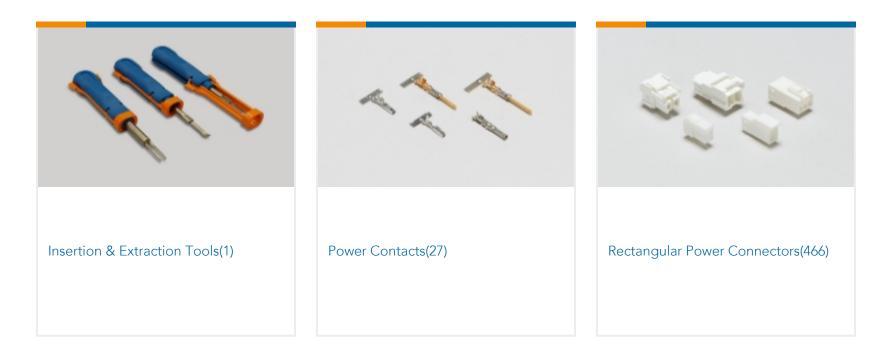

# Customers Also Bought



| RPS-1K-10-2/2.0-9 | K-Type Tie-On Markers | FREE HANG SNGL ROW HSG 10 POS | 04P MR HDR ASSY V0 |
|-------------------|-----------------------|-------------------------------|--------------------|
|                   |                       |                               |                    |
|                   |                       |                               |                    |

### Documents

Product Drawings FREE HANG SNGL ROW HSG 9 POS

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1445049-9\_B1.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1445049-9\_B1.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1445049-9\_B1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9 Position, 3 mm [.118 in] Centerline, Wire & Cable, UL 94V-0, Micro MATE-N-LOK



Datasheets & Catalog Pages

SOFT\_SHELL\_PIN\_AND\_SOCKET\_CONNECTORS\_CATALOG

English

MICRO MATE-N-LOK CONNECTOR SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance TE Material Declaration

English