RITS | RITS Header Connectors PCB Mount

TE Internal #: 1473567-3

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 6.5 mm [.

255 in] Centerline, Partially Shrouded, Gold, RITS Header


Connectors PCB Mount

View on TE.com >




Connectors > PCB Connectors > PCB Headers & Receptacles











Connector System: Wire-to-Board

Number of Positions: 3

Number of Rows: 3

Centerline (Pitch): 6.5 mm [.255 in]
PCB Mount Orientation: Vertical

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Configuration Features	
Number of Columns	4
Number of Loaded Positions	3
Connector Contact Load Condition	Fully Loaded
Number of Positions	3
Number of Rows	3
PCB Mount Orientation	Vertical
Electrical Characteristics	

32 VDC

Operating Voltage



Body Features

Primary Product Color	Black
Contact Features	
Contact Layout	Matrix
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.2 μm[7.87 μin]
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
Contact Mating Area Plating Material	Gold
Contact Type	Receptacle
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.2 mm[.007 in]
Rectangular Termination Post & Tail Width	.6 mm[.023 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	Without
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	6.5 mm[.255 in]
Dimensions	
Connector Length	25.9 mm[1.019 in]
Connector Height	13 mm[.511 in]
Connector Width	15.8 mm[.622 in]
Usage Conditions	
Operating Temperature Range	-30 – 75 °C[-22 – 167 °F]

Operation/Application



Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Type	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts





Also in the Series | RITS Header Connectors PCB Mount



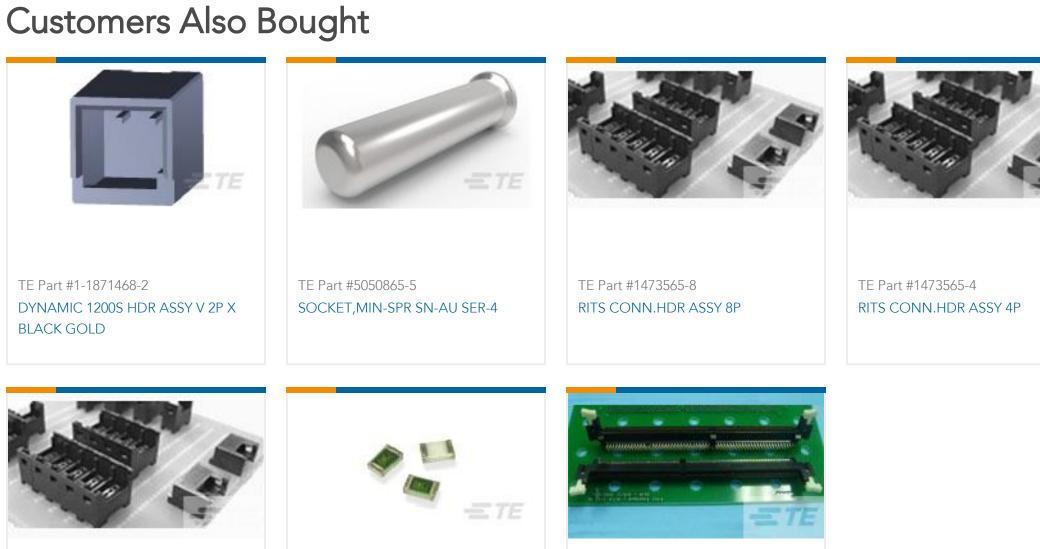

TE Part #3-1489841-2

DDR2 240P PB FREE 3.18 15AU HD

TE Part #6-2176088-0

RP 1J 0.166W 3K65 0.1% 25PPM 1K RL

Documents

TE Part #1473565-3

RITS CONN.HDR ASSY 3P

Product Drawings RITS CONN.HDR ASSY 4ROW 3P

Japanese

CAD Files

Customer View Model ENG_CVM_CVM_1473567-3_D.2d_dxf.zip



English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1473567-3_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1473567-3_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Remote Input Output Terminal System (RITS) Connectors

English

Product Specifications

Product Specification

Japanese

Product Environmental Compliance

MD_1473567-3_070120141015_dmtec

English

MD_1473567-3_070120141015_dmtec

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

RITS Connector Interconnection System/e-CON Connector

Japanese