

EUROCARD | Eurocard Type R

TE Internal #: 148295-5 Eurocard Connectors, Receptacle, Board-to-Board, 150 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Right Angle, Eurocard Type R

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors



Connector & Housing Type: Receptacle Connector System: Board-to-Board Termination Post & Tail Length: 2.92 mm [.115 in] Number of Positions: 150 Centerline (Pitch): 2.54 mm [.1 in]

Features



Product Type Features

Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Standard
DIN Level	II
Configuration Features	
Number of Positions	150
Number of Rows	3
PCB Mount Orientation	Right Angle
Number of Columns	16
Number of Signal Positions	150
Rows Loaded	А, В, С
Body Features	
Primary Product Color	Gray

Eurocard Connectors, Receptacle, Board-to-Board, 150 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Right Angle, Eurocard Type R



Contact Features

Contact Type	Socket
Contact Mating Area Plating Material	Tin-Lead
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Termination Post & Tail Length	2.92 mm[.115 in]
Mechanical Attachment	
Mating Retention	With
Mating Alignment	Without
Mating Alignment PCB Mount Alignment	Without
PCB Mount Alignment	Without
PCB Mount Alignment Panel Mount Feature	Without Without

Housing Features

Housing Material	Polyester - GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Height	18.54 mm
PCB Thickness (Recommended)	1.57 mm[.062 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	

Eurocard Connectors, Receptacle, Board-to-Board, 150 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Right Angle, Eurocard Type R



Box
Not Compliant
Compliant with Exemptions
Restricted Materials Above Threshold
Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicabl governmental regulations relevant to your geographic location.
Not Low Halogen - contains Br or Cl > 900 ppm.
Not applicable for solder process capabili

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | Eurocard Type R

Eurocard Connectors, Receptacle, Board-to-Board, 150 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Right Angle, Eurocard Type R



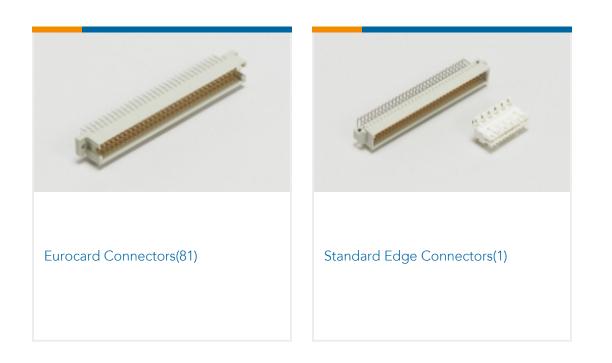

Customers Also Bought



15P AMPMODU II STIFT LEI

Documents

Product Drawings 150 EURO TYP R RECEPT EON ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_148295-5_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_148295-5_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_148295-5_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Eurocard Connectors, Receptacle, Board-to-Board, 150 Position, .1 in [2.54 mm] Centerline, Printed Circuit Board, 3 Row, Right Angle, Eurocard Type R



Product Specifications Application Specification

English