# 1563123-1 ~ ACTIVE

### AMP | MCON Interconnection System

TE Internal #: 1563123-1 Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 10 Position, .1 in / .205 in [2.54 mm / 5.2 mm] Centerline, MCON Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 10

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 2.54 mm, 5.2 mm [ .1 in, .205 in ]

Sealable: No

### Features

### **Product Type Features**

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Wire

Connector & Housing Type	Housing for Female Terminals
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	10
Number of Rows	3
Electrical Characteristics	
Operating Voltage	14 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	Neutral
Contact Features	

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 10 Position, .1 in / .205 in [2.54 mm / 5.2 mm] Centerline, MCON Interconnection System



Contact Size	1.2mm, 2.8mm
Contact Type	Receptacle
Mating Tab Width	1.2 mm, 2.8 mm[.047 in][.11 in]
Contact Current Rating (Max)	12 A, 35 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	2.54 mm, 5.2 mm[.1 in][.205 in]
Dimensions	
Row-to-Row Spacing	4.24 mm[.167 in]
Usage Conditions	
Operating Temperature (Max)	120 °C[248 °F]

Operating	Temperature	Range
-----------	-------------	-------

## -40 - 120 °C[-40 - 248 °F]

Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	1500
Packaging Method	Box & Carton
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 10 Position, .1 in / .205 in [2.54 mm / 5.2 mm] Centerline, MCON Interconnection System




EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


# **Compatible Parts**



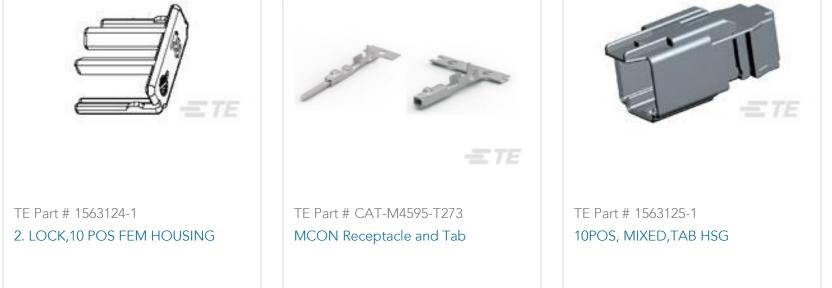




# Also in the Series | MCON Interconnection System

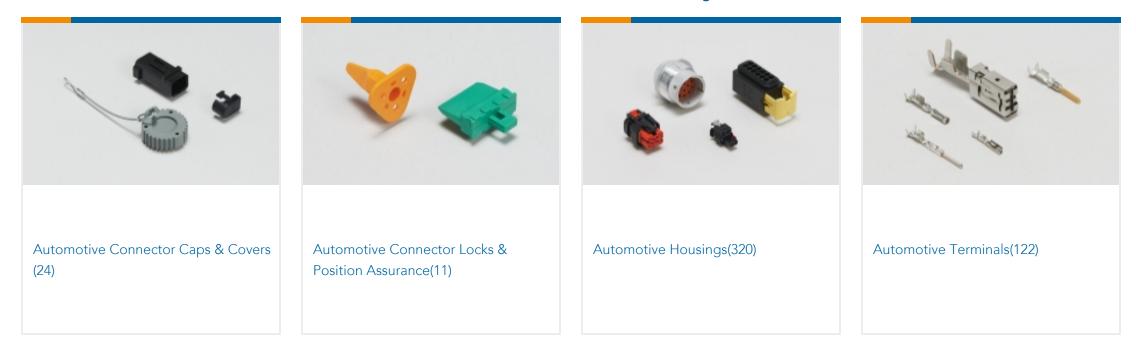

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 10 Position, .1 in / .205 in [2.54 mm / 5.2 mm] Centerline, MCON Interconnection System



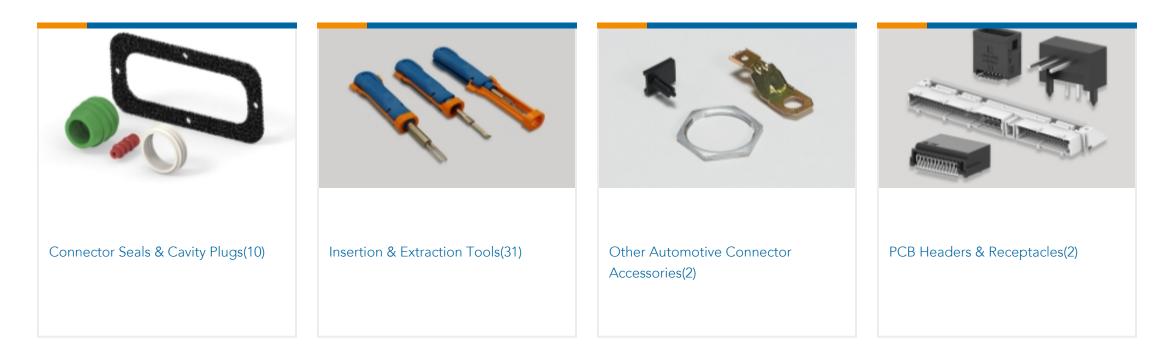

# Customers Also Bought



2W RECEPTACLE HPSL CONNECTOR GREEN	40POS,TAB0.64X0.64,HDR ASSY, 180DEG,SLDR	V23134A1052X294-EV-CBOX	EDS OVERMOLDED 2P ASSY, BLUE
TE Part #E206743001 ACW0219-0.50-56(NS)			
Documents			
Product Drawings 10POS, MIXED,REC HSG			

English

### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_1563123-1\_A.2d\_dxf.zip

English

3D PDF

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire, 10 Position, .1 in / .205 in [2.54 mm / 5.2 mm] Centerline, MCON Interconnection System



3D

Customer View Model ENG\_CVM\_CVM\_1563123-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1563123-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MCON Interconnection System

English

**Product Specifications** 

Application Specification

English

**Application Specification** 

English

Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English