


VAL-U-LOK

TE Internal #: 1586104-3 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-0 View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

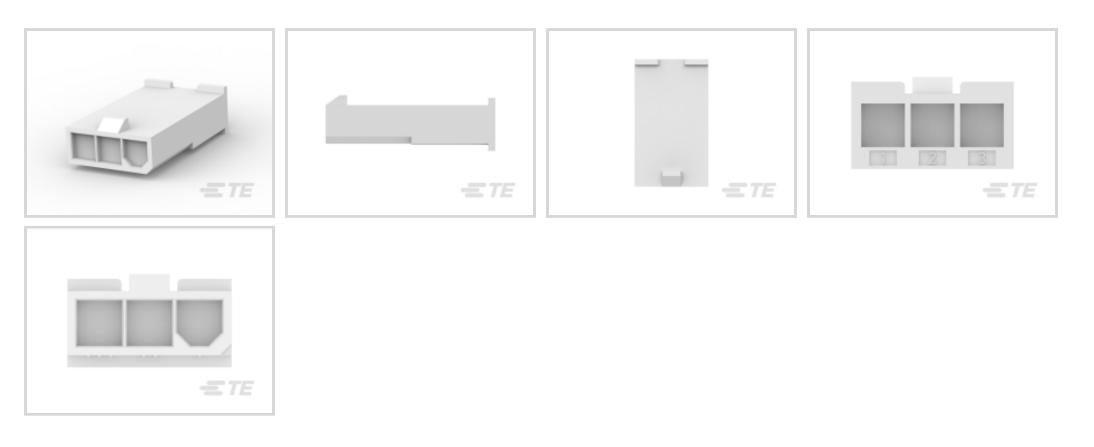

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: **3**

Centerline (Pitch): 4.2 mm [.165 in]

Features

Product Type Features

Rectangular Power Connector Type	Housing			
Connector & Housing Type	Plug			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Insertion Force	15 Newton			
Compatible With Wire & Cable Type	Discrete Wire			
Number of Positions	3			
Number of Rows	1			
Electrical Characteristics				
Operating Voltage	600 VAC			
Contact Features				
Contact Layout	Inline			

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-0



Contact Retention Within Housing	Without
Contact Type	Pin
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	4.2 mm[.165 in]
Housing Color	White
Housing Material	Nylon 66
Dimensions	
Connector Height	7.4 mm[.291 in]
Product Width	23.9 mm[.94 in]
Product Length	13.8 mm[.543 in]
Compatible Insulation Diameter Range	1.2 – 3.1 mm[.047 – .122 in]
Usage Conditions	

Operating Temperature Range

-40 – 105 °C[-40 – 221 °F]

Operation/Application

Circuit Application	Power & Signal				
Identification Marking					
Circuit Identification Feature	With				
Industry Standards					
CSA Rating	208567				
UL Rating	Recognized				
Agency/Standard	CSA, UL				
Approved Standards	UL E28476				
UL Flammability Rating	UL 94V-0				
Glow Wire Rating	Standard Part - Not Glow Wire				
Packaging Features					
Packaging Quantity	1000				
Packaging Method	Bag				

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-0



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Canability	Not applicable for solder process capability

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-0



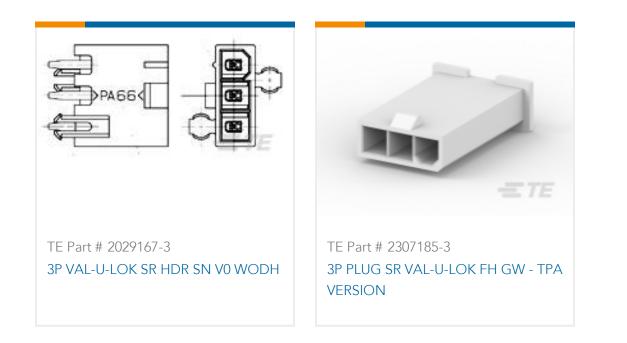

Customers Also Bought



MR RECEPTACLE PTPPHBZ	03P MINI-UMNL ASSY VO SNNI*	DYNAMIC D-5 TAB CONTACT L SIZE	CELLO,PIN,48P,TH,RA,FG,DIP3.0,CLIP	
		0.38Au		



Documents

Product Drawings 3P PLUG VAL-U-LOK SR FH V0

English

CAD Files

Customer View Model

ENG_CVM_CVM_1586104-3_B.2d_dxf.zip

English

3D PDF

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-0



3D

Customer View Model ENG_CVM_CVM_1586104-3_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1586104-3_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Agency Approvals UL Report

English