




SIAMEZE

TE Internal #: 1601046-1

Magnet Wire Terminals, Wire-to-Wire, Lead Wire Size 22 – 18 AWG,
Lead Wire Size .3 – .8 mm², .16 – 1.02 mm Magnet Wire, SIAMEZE

[View on TE.com >](#)

Terminals & Splices > Magnet Wire Terminals

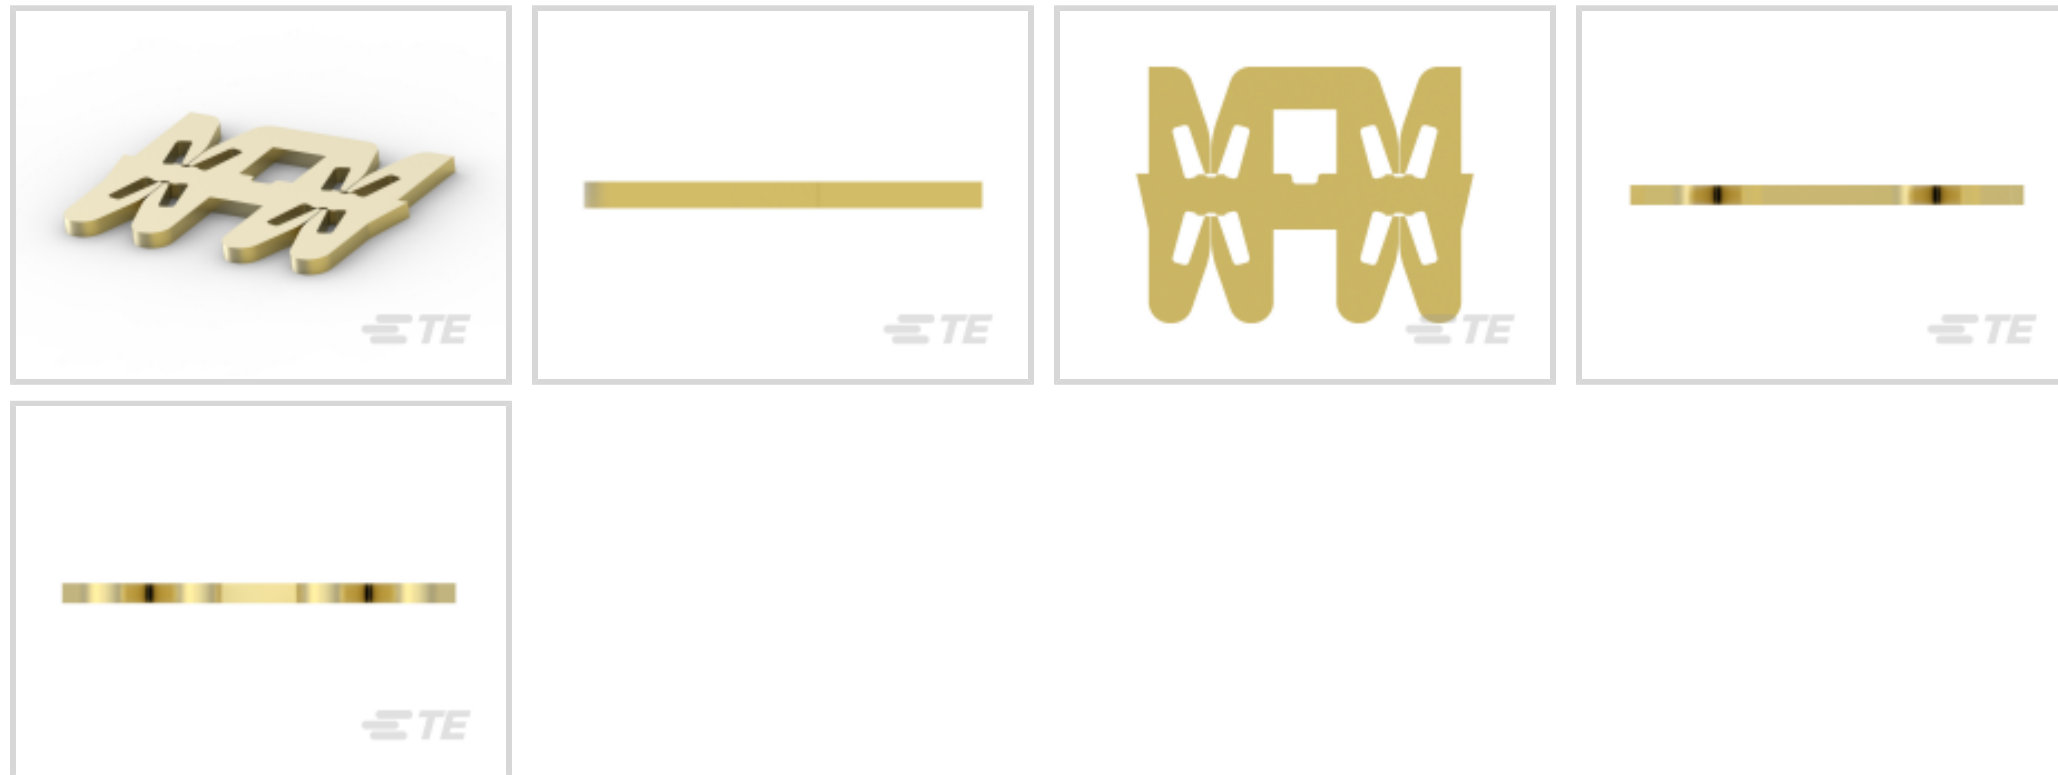

Magnet Wire Terminal Type: **Wire-to-Wire**

Compatible Insulation Diameter (Max): **2.9 mm [.115 in]**

Compatible Insulation Diameter Range: **2.9 mm [.115 in]**

Lead Wire Size: **.3 – .8 mm²**

Features

Product Type Features

| | |
|------------------------------------|-------------------------|
| Compatible With Discrete Wire Type | Magnet Wire & Lead Wire |
|------------------------------------|-------------------------|

Contact Features

| | |
|---------------------------|--------------|
| Magnet Wire Terminal Type | Wire-to-Wire |
| Terminal Plating Material | Unplated |
| Terminal Orientation | Straight |

Termination Features

| | |
|------------------------------------|-------------------------------|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
|------------------------------------|-------------------------------|

Mechanical Attachment

| | |
|-----------------------|-------|
| Mating Retention Type | Barbs |
|-----------------------|-------|

Dimensions

| | |
|--------------------------------------|-------------------------|
| Terminal Height | 3.17 mm[.125 in] |
| Compatible Insulation Diameter (Max) | 2.9 mm[.115 in] |
| Compatible Insulation Diameter Range | 2.9 mm[.115 in] |
| Lead Wire Size | .3 – .8 mm ² |
| Magnet Wire Size | .16 – 1.02 mm |



| | |
|------------------------------------|----------------|
| Stock Thickness (Magnet Wire Side) | .51 mm[.02 in] |
|------------------------------------|----------------|

| | |
|----------------|----------------|
| Product Length | 7.62 mm[.3 in] |
|----------------|----------------|

Usage Conditions

| | |
|-------------------|-------------|
| Insulation Option | Uninsulated |
|-------------------|-------------|

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 175 °C[-40 – 347 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|------------------------------------|--------|
| Compatible With Wire Base Material | Copper |
|------------------------------------|--------|

Packaging Features

| | |
|--------------------|-------|
| Packaging Quantity | 50000 |
|--------------------|-------|

| | |
|------------------|------|
| Packaging Method | Reel |
|------------------|------|

Other

| | |
|-----------------------------|--|
| Terminals & Splices Comment | Lead wire may be stranded, solid or bonded with 105° C PVC insulation. Contact TE when using lead wires with other types of insulation., Magnet wire 30 AWG or smaller also requires a wrap post per P/N 1601447, Recommended Pocket P/N 1601433, Recommended Pocket P/N 1601440 |
|-----------------------------|--|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
|------------------------------|-----------|

| | |
|-----------------------------|-----------|
| EU ELV Directive 2000/53/EC | Compliant |
|-----------------------------|-----------|

| | |
|---|---|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
|---|---|

| | |
|--|---|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
|--|---|

| | |
|-----------------|---|
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
|-----------------|---|


| | |
|---------------------------|--|
| Solder Process Capability | Not applicable for solder process capability |
|---------------------------|--|

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 8-1601046-1
331-101-000=WIRE2WIRE,STD,SMZ



TE Part # 6-1601046-2
WIRE2WIRE,STD,SMZ



TE Part # 1601046-3
STANDARD WIRE TO WIRE SIAMEZE,
HIGH TEMP,



TE Part # 2322343-2
WIRE2WIRE,STD,SMZ FOR AL WIRE



TE Part # 4-1601056-1
031-119-000=WIRE2WIRE,STD,SMZ




TE Part # 8-1601046-2
331-101-000=WIRE2WIRE,STD,SMZ




TE Part # 1601433
531-101-002= POCKET
SPECIFICATION

Also in the Series | SIAMEZE



Insertion & Extraction Tools(1)



Magnet Wire Terminals(196)

Customers Also Bought



Documents

Product Drawings

[131-101-000=WIRE2WIRE,STD,SMZ](#)

English

[131-101-000=WIRE2WIRE,STD,SMZ](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1601046-1_H.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1601046-1_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1601046-1_H.3d_stp.zip](#)

English



Datasheets & Catalog Pages

Magnet Wire Terminals & Splices

English

1-1773702-7 _IDC_Magnet_Wire

English

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals

UL Report

English