


## AMP Power Series - 175 TE Internal #: 1604044-3 Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175

#### View on TE.com >



#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

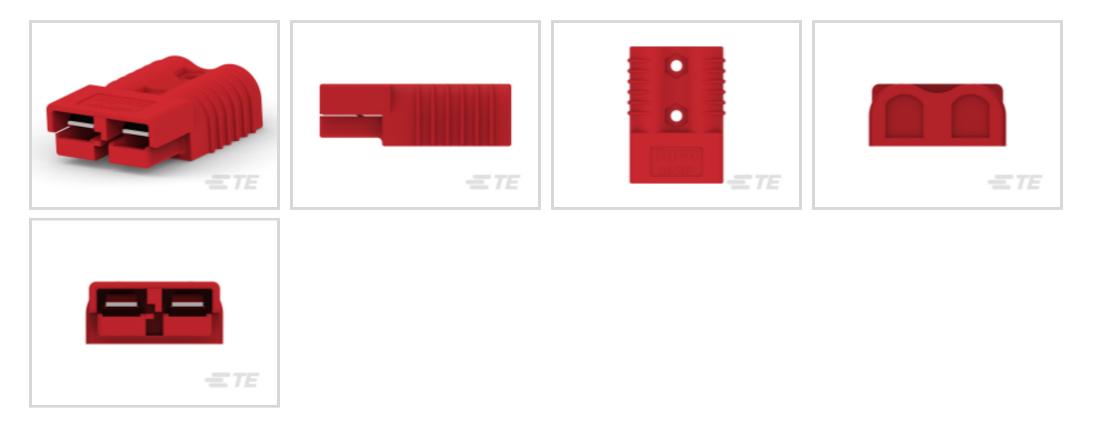

Rectangular Power Connector Type: Connector Assembly

Connector & Housing Type: Plug, Receptacle

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 19.06 mm [.75 in ]

### Features

### **Product Type Features**

Assembly Requirement	Unassembled Kit							
Compatible With Discrete Wire Type	Stranded							
Rectangular Power Connector Type	Connector Assembly							
Connector & Housing Type	Plug, Receptacle							
Connector System	Wire-to-Wire							
Sealable	No							
Connector & Contact Terminates To	Wire & Cable							
Configuration Features								
Number of Positions	2							
Electrical Characteristics								
Operating Voltage	600 VDC							
Contact Features								
Contact Current Rating (Max)	175 A							
Contact Type	Blade							

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175



### **Termination Features**

Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Retention	With
Mating Alignment	With
Panel Mount Feature	Without
Mating Retention Type	Latch
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	19.06 mm[.75 in]
Housing Color	Red
Housing Material	Polycarbonate
Dimensions	
Connector Height	25.4 mm[1 in]
Product Width	53.5 mm[2.11 in]
Product Length	78.2 mm[3.08 in]
Wire Size	41444 CMA
Usage Conditions	
Operating Temperature Range	-20 – 105 °C[-4 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Method	Package

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175



### Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not applicable for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




## Also in the Series | AMP Power Series - 175

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175





# Customers Also Bought

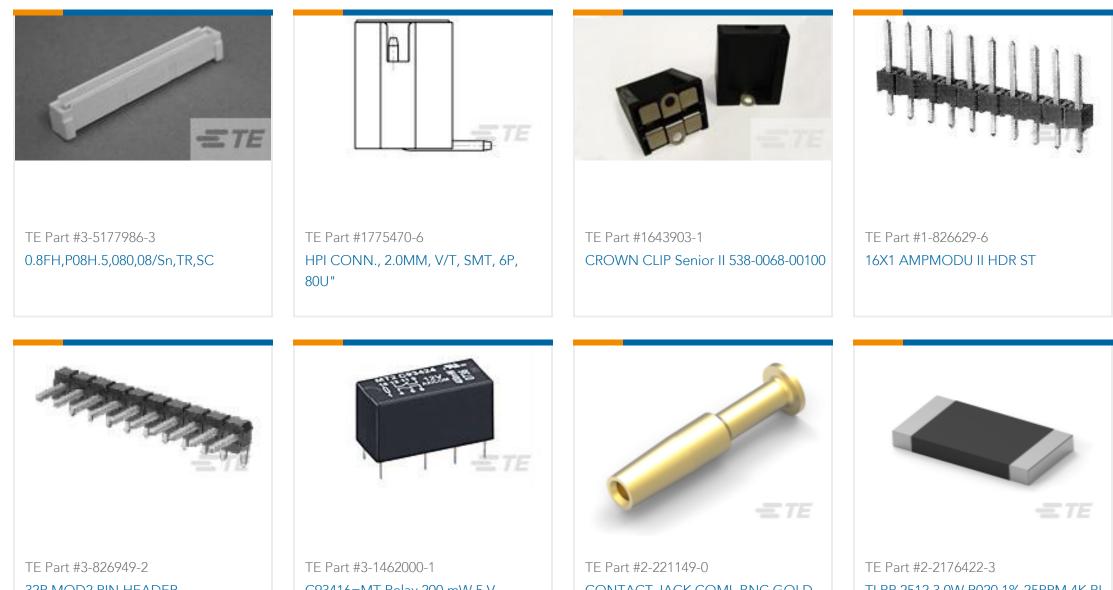

32P MOD2 PIN HEADER	C93416=MT Relay 200 mW 5 V	CONTACT, JACK, COML BNC, GOLD	TLRP 2512 3.0W R020 1% 25PPM 4K RL
		PL	

### Documents

Product Drawings

### KIT,175A, 4 AWG,RED

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1604044-3\_O.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1604044-3\_O.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1604044-3\_O.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, 19.06 mm [.75 in] Centerline, AMP Power Series - 175



Datasheets & Catalog Pages POWER\_CONNECTORS\_CATALOG\_SEC02\_CABLE\_MOUNTED

English

2\_PIECE\_POWER\_CONNECTORS\_qrg\_4-1773458-1

English

Product Specifications Application Specification

English