


AMP Power Series - 180 TE Internal #: 1604396-4 Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180

View on TE.com >



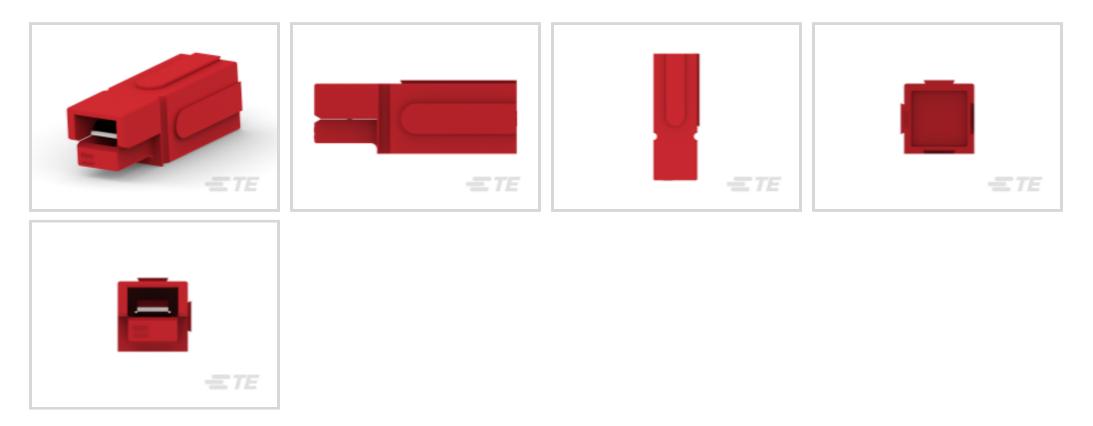

Rectangular Power Connector Type: Connector Assembly

Connector & Housing Type: Plug, Receptacle

Connector System: Wire-to-Wire

Number of Positions: 2

Sealable: No

Features

connectivity

Product Type Features

Assembly Requirement	Unassembled Kit
Compatible With Discrete Wire Type	Stranded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Plug, Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	2
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 VDC

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180



Contact Features

Contact Mating Area Plating Material	Silver
Contact Current Rating (Max)	180 A
Contact Retention Within Housing	Without
Contact Type	Blade
Wire Contact Termination Area Plating Material	Silver
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Mating Retention	With
Mating Alignment	Without
Panel Mount Feature	Without
Mating Retention Type	Latch
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Housing Color

Red

Housing Material

Polycarbonate

Dimensions	
Connector Height	28.25 mm[1.112 in]
Product Width	28.56 mm[1.12 in]
Product Length	82.6 mm[3.25 in]
Wire Size	67100 – 69073 CMA
Usage Conditions	
Operating Temperature Range	-20 – 105 °C[-4 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL
Agency/Standard Approved Standards	UL E28476

C For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180



Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Method	Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge

based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | AMP Power Series - 180

C For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180





Customers Also Bought



Documents

Product Drawings KIT,180A,2 AWG,RED

English

CAD Files

Customer View Model

ENG_CVM_1604396-4_O.3d_igs.zip

English

Customer View Model

ENG_CVM_1604396-4_O.3d_stp.zip

English

Customer View Model

ENG_CVM_1604396-4_O.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Application Specification

S For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180



English

Application Specification

English