


AMP Power Series - 180 TE Internal #: 1604398-2 Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180

#### View on TE.com >

#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

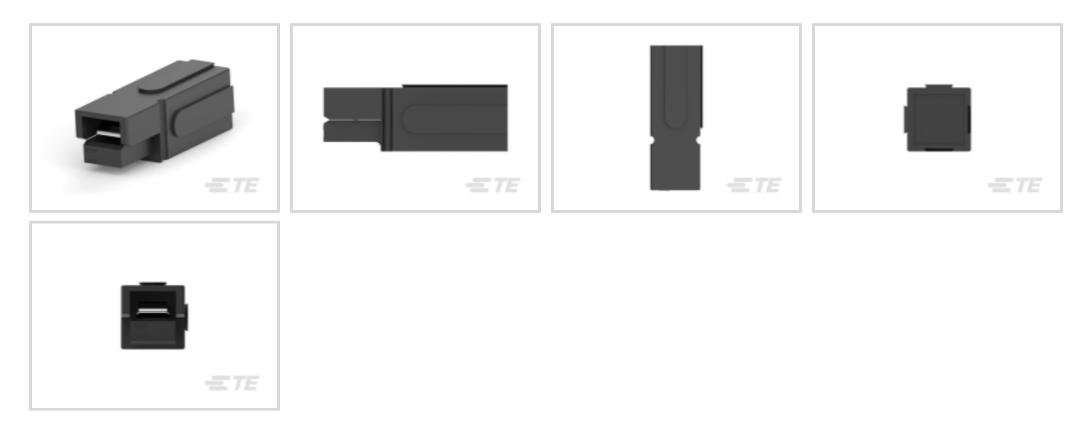

Rectangular Power Connector Type: Connector Assembly

Connector & Housing Type: Plug, Receptacle

Connector System: Wire-to-Wire

Number of Positions: 2

Sealable: No

# Features



### **Product Type Features**

Assembly Requirement	Unassembled Kit
Compatible With Discrete Wire Type	Stranded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Plug, Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	2
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 VDC

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180



### **Contact Features**

Contact Mating Area Plating Material	Silver
Contact Current Rating (Max)	180 A
Contact Retention Within Housing	Without
Contact Type	Blade
Wire Contact Termination Area Plating Material	Silver
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Mating Retention	With
Mating Alignment	Without
Panel Mount Feature	Without
Mating Retention Type	Latch
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Housing Color

Black

# Housing Material

# Polycarbonate

Dimensions	
Connector Height	28.25 mm[1.112 in]
Product Width	28.56 mm[1.12 in]
Product Length	82.6 mm[3.25 in]
Wire Size	78941 – 118412 CMA
Usage Conditions	
Operating Temperature Range	-20 – 105 °C[-4 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180




Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Method	Package
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# Also in the Series | AMP Power Series - 180



# **Customers Also Bought**

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180



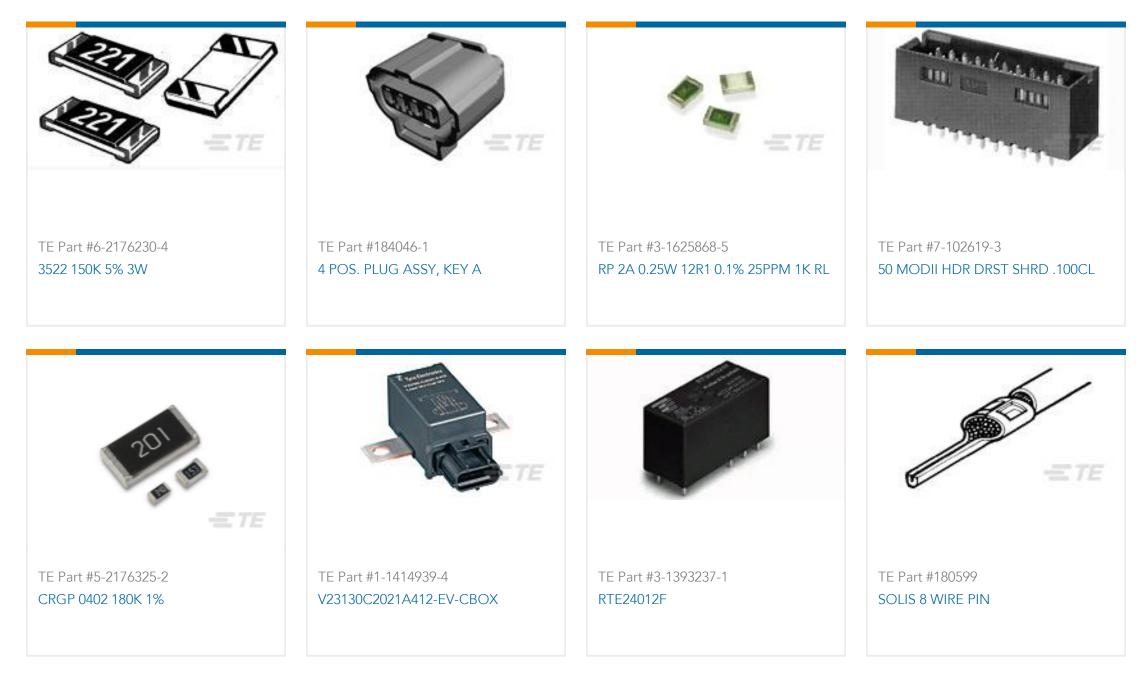



TE Part #184030-3 RECPT, CONTACT 070, PTPPHBZ

## Documents

Product Drawings KIT,180A,1/0 AWG,BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1604398-2\_P.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1604398-2\_P.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1604398-2\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Connector Assembly, Plug / Receptacle, Wire-to-Wire, 2 Position, Wire & Cable, UL 94V-0, AMP Power Series - 180



### POWER\_CONNECTORS\_CATALOG\_SEC02\_CABLE\_MOUNTED

English

**Product Specifications Application Specification** English

Application Specification

English