

# HFW4A1201D00 ✓ ACTIVE



CII

TE Internal #: 1617036-6

Half-Size Relays, 2 Form C, DPDT, 2 C/O, 26.5 – 32 VDC Input, 4 A, 26.5 – 32 VDC Coil Voltage, 1250  $\Omega$  Coil Resistance, 684 mW Coil Power (DC)

[View on TE.com >](#)

Relays, Contactors & Switches > Relays > Mil-Aero Relays > Half-Size Relays



Half-Size Relay Contact Arrangement: **2 Form C, DPDT, 2 C/O**

Half-Size Relay Input Voltage: **26.5 – 32 VDC**

Half-Size Relay Contact Current Rating: **4 A**

Half-Size Relay Coil Voltage Rating: **26.5 – 32 VDC**

Half-Size Relay Coil Resistance: **1250  $\Omega$**

## Features

### Product Type Features

Enclosure Type	Hermetically Sealed
Relay Type	Military/Aerospace High Performance
Coil Latching	Without
Product Type	Relay
MOSFET Driver	Without

### Configuration Features

Transistor Driver	Without
-------------------	---------

### Electrical Characteristics

Coil Magnetic System	Non-Polarized, Monostable
Actuating System	DC
Vibration	20G's, 10 – 2000Hz
Shock	100G's, 6ms
Coil Suppression Diode	Without
Coil Power Measurement	Milliwatts
Coil Polarity Protection Diode	Without
Half-Size Relay Input Voltage	26.5 – 32 VDC
Half-Size Relay Coil Voltage Rating	26.5 – 32 VDC



Half-Size Relay Coil Resistance	1250 Ω
Half-Size Relay Coil Power Rating (DC)	684 mW

**Contact Features**

Half-Size Relay Contact Arrangement	2 Form C, DPDT, 2 C/O
Half-Size Relay Contact Current Rating	4 A

**Termination Features**

Termination Type	PC Pins
------------------	---------

**Mechanical Attachment**

Half-Size Relay Mounting Type	Printed Circuit Board
-------------------------------	-----------------------

**Usage Conditions**

Operating Temperature Range	-65 – 125 °C
-----------------------------	--------------

**Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2-1617118-0  
J1MACD-26XM = M39016/23-030M



TE Part # 1-1617122-2  
JMACD-26XM = M39016/15-081M



TE Part # 1617125-5  
JMAW-26XL = M39016/9-018L



TE Part # 1617122-9  
JMACD-26XL = M39016/15-081L



TE Part # 1-1617164-0  
JMACT-5XMS = M28776/1-031M



TE Part # 1617126-6  
JMAWD-26XP = M39016/15-033P



TE Part # 5-1617542-3  
JMAWDD-26XL=M39016/20-012L



TE Part # 3-1617351-7  
JMAWDG-18XP=M39016/15-068P



TE Part # 1-1617148-3  
JMGAPDD-18P = M39016/19-029P



TE Part # 1617132-8  
JMSWD-5XP = M39016/16-017P



TE Part # 1-1617118-4  
J1MACD-12XM = M39016/23-028M



TE Part # 1617118-7  
J1MAC-26XPS = M39016/7-036P



TE Part # 1617130-5  
JMSPD-26XM = M39016/16-028M



TE Part # 7-1617531-7  
HC3-5B=HC RELAY



TE Part # 7-1617350-7  
J1MAC-18XL=M39016/7-029L



TE Part # 4-1617118-1  
J1MAP-26XP = M39016/7-024P



TE Part # 3-1617541-8  
J1MSW-18XP=M39016/10-031P



TE Part # 1-1617120-4  
J1MSWD-5XP = M39016/25-017P






TE Part # 1-1617121-2  
JMAC-26XPS = M39016/9-076P



TE Part # 1617163-5  
JMACDD-18XP = M39016/20-053P

## Customers Also Bought

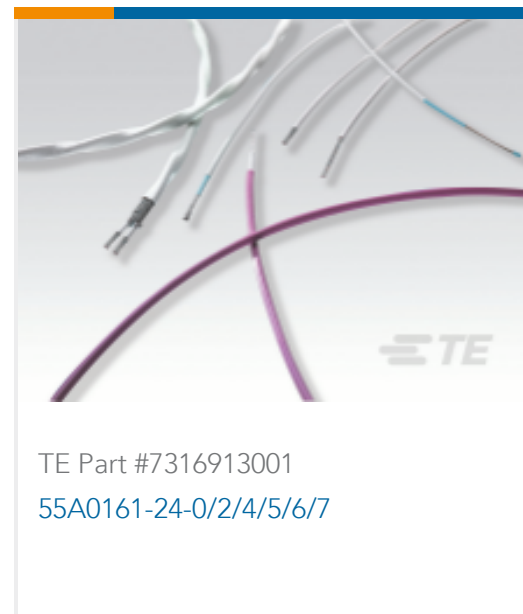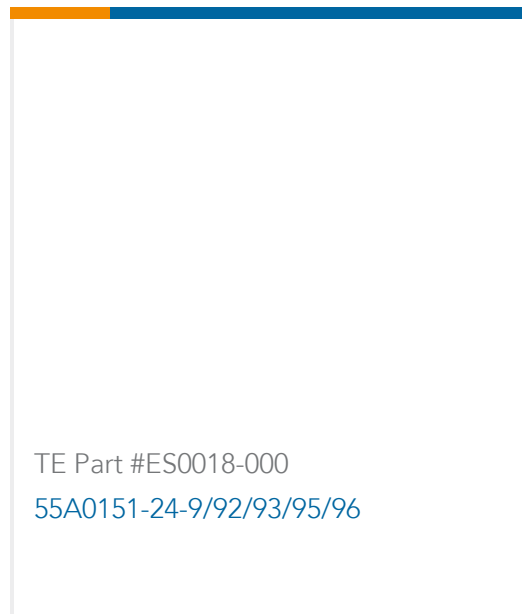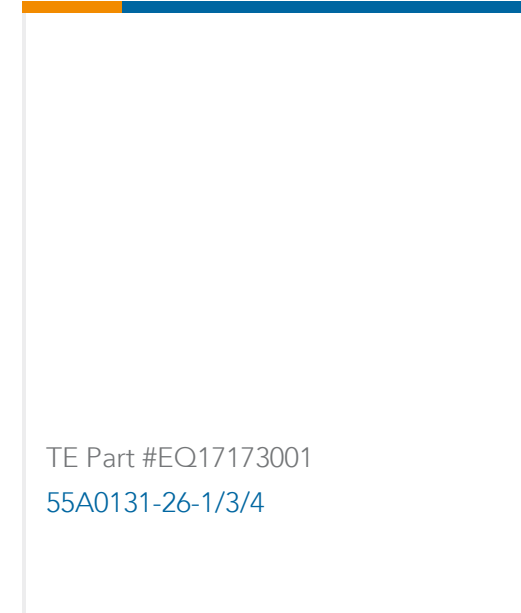

## Documents

### CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1617036-6\\_7.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1617036-6\\_7.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1617036-6\\_7.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[5-1773450-5\\_sec1\\_HFW4A](#)

English

**RELAY**

English

HF4A1201D00

Half-Size Relays, 2 Form C, DPDT, 2 C/O, 26.5 – 32 VDC Input, 4 A, 26.5 – 32 VDC Coil Voltage, 1250  $\Omega$  Coil Resistance, 684 mW Coil Power (DC)

