# SBCHE15100RJ <

### CGS | CGS SBC

TE Internal #: 1623729-1 100 Ω, Wire Wound, Power Resistor, 5 %, 75 x 10 x 9 mm, 2 Termination, Loose Piece - Box, 17 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Vertical Mount



Resistor Type: Power Resistor

Passive Component Dimensions: 75 x 10 x 9 mm

Number of Terminations: 2

Packaging Method: Loose Piece - Box

Passive Component Tolerance: 5%

All Wirewound Resistor: Vertical Mount (166)

## Features

## Product Type Features

Product Type

Resistor Type

Fixed Resistor

Power Resistor

Element Type	Wire Wound	
Configuration Features		
Number of Resistors	1	
Electrical Characteristics		
Passive Component Tolerance	5 %	
Resistance Class	Up to 1kΩ	
Resistance Value	100 Ω	
Power Rating	17 W	
Body Features		
Passive Component Lead Type	Axial-Leaded	
Termination Features		
Number of Terminations	2	
Passive Component Termination Material Type	Tinned Copper Leads	
Dimensions		

**C** For support call+1 800 522 6752

09/23/2023 05:08PM | Page 1

## SBCHE15100RJ

100  $\Omega$ , Wire Wound, Power Resistor, 5 %, 75 x 10 x 9 mm, 2 Termination, Loose Piece - Box, 17 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC



Passive Component Dimensions	75 x 10 x 9 mm
Usage Conditions	
Operating Temperature Range	-55 – 350 °C
Temperature Coefficient	±200 ppm/°C
Packaging Features	
Packaging Method	Loose Piece - Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


## SBCHE15100RJ

100 Ω, Wire Wound, Power Resistor, 5 %, 75 x 10 x 9 mm, 2 Termination, Loose Piece - Box, 17 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC




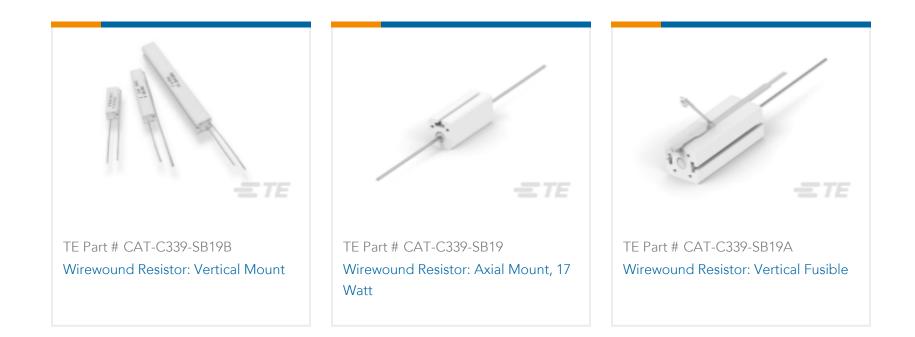

# Also in the Series | CGS SBC

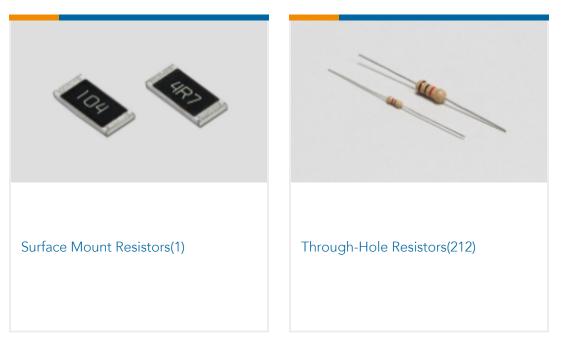

# Customers Also Bought

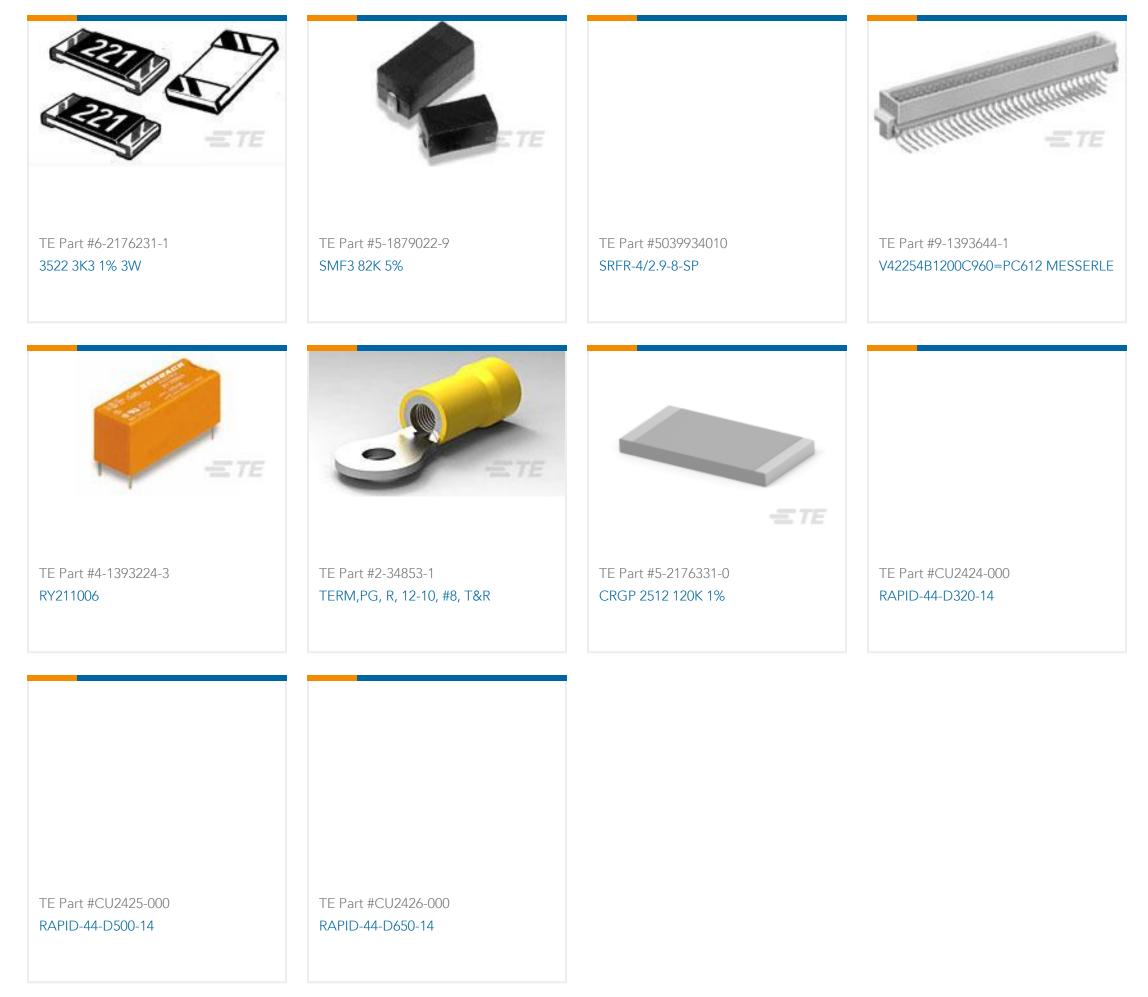

## SBCHE15100RJ

100 Ω, Wire Wound, Power Resistor, 5 %, 75 x 10 x 9 mm, 2 Termination, Loose Piece - Box, 17 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC



## Documents

Product Drawings BCHE 17 W 100R 5%

English

Datasheets & Catalog Pages 4-1773460-6\_RESISTIVE\_SOLUTIONS\_RAIL

English

1309350\_PASSIVE\_COMPONENT

English

High Power Resistor - Type SBC (Square Ceramic) Series - Tyco Electronics Passives

English

8-1773459-4\_POWER\_FILTERING\_AND\_RESISTIVE\_SOLUTIONS\_FOR\_ELEVATORS\_AND\_ESCALATORS

English