

Sigma | Sigma SC TE Internal #: 1624013-4 22 μH, Radio Frequency Inductor, 232 mA, 3.3 Ω DC Resistance, Axial-Leaded, Wire Wound, 10 %, 7 x 2.8 mm, Ammo Packed, Through Hole - Solder, Sigma SC

View on TE.com >



Passive Components > Inductors > High Frequency & RF Inductors



Inductor Type: Radio Frequency

Termination Method to Printed Circuit Board: Through Hole - Solder

Packaging Method: Ammo Packed

Passive Component Dimensions: 7 x 2.8 mm

Passive Component Tolerance: 10 %

Features

Product Type Features

Inductor Type

Element Type

Radio Frequency

Wire Wound

Electrical Characteristics

Self Resonant Frequency	.025 GHz
Passive Component Tolerance	10 %
Inductance	22 μΗ
Current Rating (Max)	232 mA
DC Resistance	3.3 Ω
Body Features	
Passive Component Lead Type	Axial-Leaded
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Dimensions	
Passive Component Dimensions	7 x 2.8 mm
Usage Conditions	
Operating Temperature Range	-55 – 100 °C
Packaging Features	

C For support call+1 800 522 6752

09/20/2023 05:09PM | Page 1

SC30220KT

22 μ H, Radio Frequency Inductor, 232 mA, 3.3 Ω DC Resistance, Axial-Leaded, Wire Wound, 10 %, 7 x 2.8 mm, Ammo Packed, Through Hole - Solder, Sigma SC



Packaging Method	Ammo Packed
Other	
Inductor Quality Factor	50
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Halogen Content

Solder Process Capability

Wave solder capable to 265°C

other sources.

BFR/CFR/PVC Free, but Br/Cl >900 ppm in

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



SC30220KT

22 μH, Radio Frequency Inductor, 232 mA, 3.3 Ω DC Resistance, Axial-Leaded, Wire Wound, 10 %, 7 x 2.8 mm, Ammo Packed, Through Hole - Solder, Sigma SC



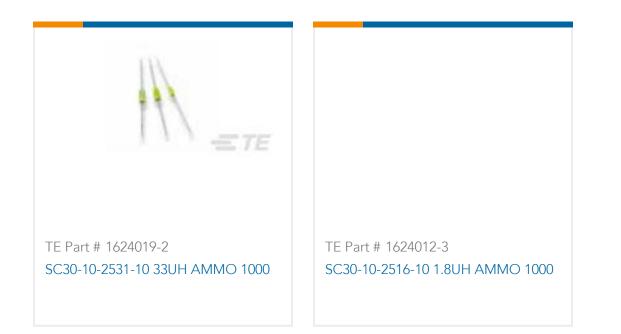


Also in the Series | Sigma SC



Customers Also Bought



TE Part #5050865-6 TE Part #2-1625971-3 TE Part #1676153-3 TE Part #1676250-3 SOCKET,MIN-SPR SN SER-4 HSA25 20K 5% RN 0805 10K 0.1% 10PPM 5KRL RN 0805 20K 0.1% 10PPM 5KRL
--

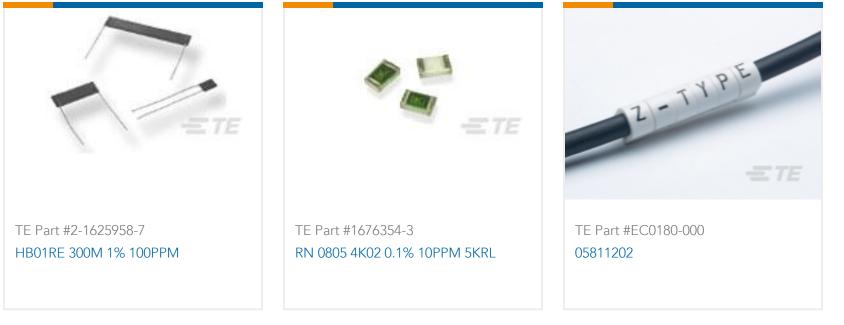

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1624013-4_BA.2d_dxf.zip

English

SC30220KT

22 μ H, Radio Frequency Inductor, 232 mA, 3.3 Ω DC Resistance, Axial-Leaded, Wire Wound, 10 %, 7 x 2.8 mm, Ammo Packed, Through Hole - Solder, Sigma SC



Customer View Model

ENG_CVM_CVM_1624013-4_BA.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_1624013-4_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages 1309350_PASSIVE_COMPONENT

English

Axial Leaded Power Inductors - Type SC10, SC15, SC30 Series - Tyco Electronics Passives

English