CGS | CGS HS TE Internal #: 1630013-3 6.8 Ω, Wire Wound, Power Resistor, 122 x 47.5 x 26 mm, 2 Termination, Loose Piece - Tray, 5 %, 150 W, ±50 ppm/°C, Solder Lug Termination, CGS HS

View on TE.com >



Passive Components > Resistors > Chassis Mount Resistors > Power Resistors: Aluminum Housed, NHS



Resistor Type: Power Resistor

Passive Component Dimensions: 122 x 47.5 x 26 mm

Number of Terminations: 2

Packaging Method: Loose Piece - Tray

Passive Component Tolerance: 5%

All Power Resistors: Aluminum Housed, NHS (4)

#### Features

#### Product Type Features

Resistor Type

Element Type

Power Resistor

Wire Wound

#### **Configuration Features**

Number of Resistors	1
Electrical Characteristics	
Voltage Rating	2500 VDC
Passive Component Tolerance	5 %
Resistance Class	Up to 1kΩ
Resistance Value	6.8 Ω
Power Rating	150 W
Termination Features	
Number of Terminations	2
Chassis Mount Resistor Termination Type	Solder Lug
Mechanical Attachment	
Chassis Mount Resistor Mount Style	Chassis Mount
Dimensions	

6.8  $\Omega,$  Wire Wound, Power Resistor, 122 x 47.5 x 26 mm, 2 Termination, Loose Piece - Tray, 5 %, 150 W, ±50 ppm/°C, Solder Lug Termination, CGS HS



Passive Component Dimensions	122 x 47.5 x 26 mm			
Jsage Conditions				
Temperature Coefficient	±50 ppm/°C			
Packaging Features				
Packaging Method	Loose Piece - Tray			
Product Compliance				
EU RoHS Directive 2011/65/EU	Compliant			
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant Compliant			
EU ELV Directive 2000/53/EC	Compliant			

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


### **Compatible Parts**


6.8 Ω, Wire Wound, Power Resistor, 122 x 47.5 x 26 mm, 2 Termination, Loose Piece -Tray, 5 %, 150 W, ±50 ppm/°C, Solder Lug Termination, CGS HS





### Also in the Series | CGS HS

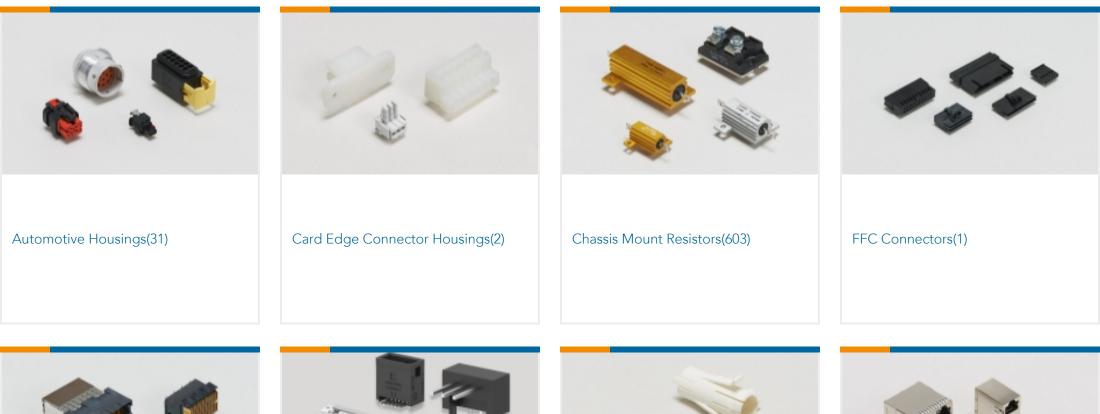











High Speed Backplane Connectors(11)	PCB Headers & Receptacles(2)	Plug & Socket Lighting Connector	RJ45 Connectors(1)	
		Accessories(1)		

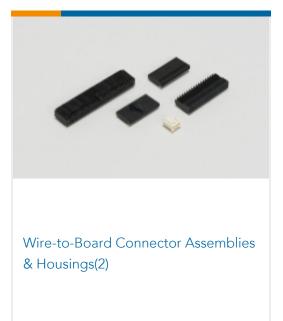

## Customers Also Bought

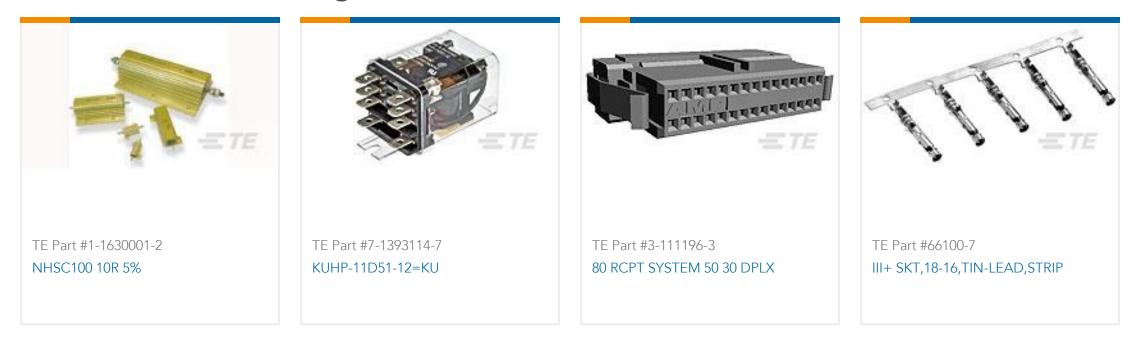

6.8  $\Omega$ , Wire Wound, Power Resistor, 122 x 47.5 x 26 mm, 2 Termination, Loose Piece -Tray, 5 %, 150 W, ±50 ppm/°C, Solder Lug Termination, CGS HS







### Documents

**Product Drawings** NHSC150 6R8 5%

English

Datasheets & Catalog Pages 1309350\_PASSIVE\_COMPONENT

English

#### 8-1773459-4\_POWER\_FILTERING\_AND\_RESISTIVE\_SOLUTIONS\_FOR\_ELEVATORS\_AND\_ESCALATORS

English