



Positive Lock | Positive Lock 250

TE Internal #: 170452-2

Quick Disconnects, Receptacle, 22 – 20 AWG Wire Size, .32 – .51 mm² Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, Brass, Positive Lock 250

[View on TE.com >](#)

Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .51 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Extraction Force	4.9 – 29.4 Newton
------------------	-------------------

Wire Insulation Support	With
-------------------------	------

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
-----------------------------	-----------------

Product Length	22.8 mm[.89 in]
----------------	-----------------

Compatible Insulation Diameter Range	1.5 – 2.4 mm[.059 – .094 in]
--------------------------------------	------------------------------

Wire Size	.32 – .51 mm ²
-----------	---------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
-----------------------------	----------------------------

Industry Standards

Agency/Standard	UL
-----------------	----

Packaging Features

Packaging Quantity	5000
--------------------	------

Packaging Method	Loose Piece/Carton
------------------	--------------------

Other

Terminals & Splices Comment	Heavy Duty
-----------------------------	------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 172320-1 POSITIVE LOCK 250 (6.3 MM) HOUSING</p>	 <p>TE Part # 172863-2 POSITIVE LOCK (PL) .250 (6.3 MM) HOUSING</p>	 <p>TE Part # 172320-2 POSITIVE LOCK 250 (6.3 MM) HOUSING</p>	 <p>TE Part # 174090-2 PL .250 (6.3 MM) HOUSING</p>
 <p>TE Part # 724659-2 EXT TOOL FOR POSITIVE .250</p>	 <p>TE Part # 172864-2 250 HSG. REC. 6mm 2P BLACK</p>	 <p>TE Part # 172434-2 POSITIVE LOCK 250 (6.3 MM) HOUSING</p>	 <p>TE Part # 174090-1 1P POSITIVE LOCK HSG</p>
 <p>TE Part # 172320-4 POSITIVE LOCK 1P GREEN</p>	 <p>TE Part # 172433-2 250 AUTOMOTIVE POSITIVE LOCK 2P</p>	 <p>TE Part # 172434-1 POSITIVE LOCK 250 (6.3 MM) HOUSING</p>	 <p>TE Part # 9-172320-2 POSIT LOCK HSG 1P BLACK VO94</p>




TE Part # 2-2150786-1
OCEAN_2.0_Applicator-E-070F1200V



TE Part # 2-2150786-2
OCEAN_2.0_Applicator-E-070F1200V



TE Part # 2150067-1
OCEAN_2.0_Applicator-E-070F1200



TE Part # 2150067-2
OCEAN_2.0_Applicator-E-070F1200



TE Part # 2150786-1
OCEAN_2.0_Applicator-E-070F1200V



TE Part # 2150786-2
OCEAN_2.0_Applicator-E-070F1200V




TE Part # 7-2150067-1
OCEAN_2.0_Applicator-E-070F1200




TE Part # 7-2150067-2
OCEAN_2.0_Applicator-E-070F1200


Also in the Series | Positive Lock 250

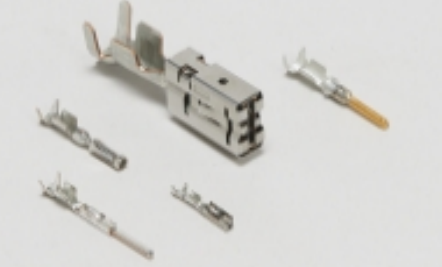

Automotive Terminals(1)

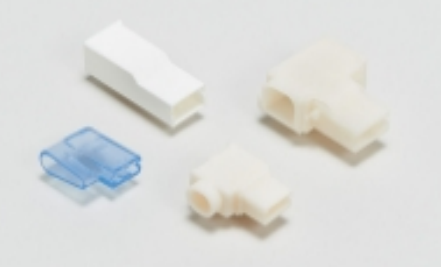


Crimp Terminal Housings(193)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)



Quick Disconnects(186)

Customers Also Bought



TE Part #1674312-1
TH/.025 CONNECTOR SYSTEM,
HOUSING




TE Part #622197-000
ES2000-NO.1-C1-0-50MM



TE Part #172434-2
POSITIVE LOCK 250 (6.3 MM)
HOUSING



TE Part #1612122-1
SQUIB LOCKING BUTTON

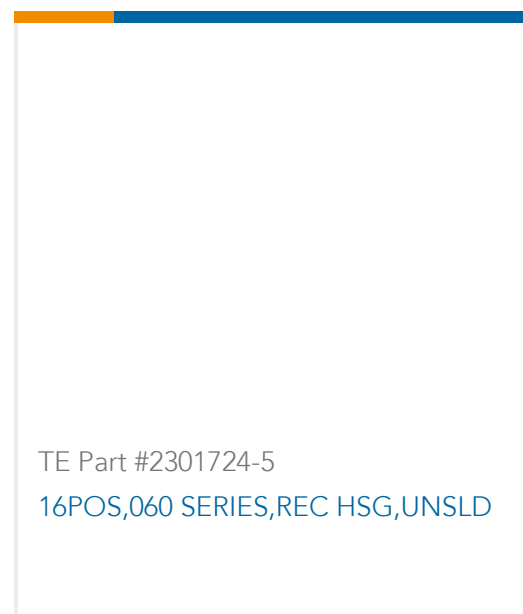

Documents

Product Drawings

[PL 250 AUTOMOTIVE REC 22-20 AWG PRE TPBR](#)

English

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)

[ENG_CVM_CVM_170452-2_N.2d_dxf.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_170452-2_N.3d_igs.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_170452-2_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Crimping of 250 Series, Automotive Positive Lock Receptacle Contact](#)

English

[Application Specification](#)

English

Product Environmental Compliance

[MD_170452-2_09212015135_dmtec](#)

English

[MD_170452-2_09212015135_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[Instruction Sheet \(non U.S.\)](#)

Japanese

170452-2

Quick Disconnects, Receptacle, 22 – 20 AWG Wire Size, .32 – .51 mm² Wire Size,
Mating Tab Width 6.35 mm [.25 in], Straight, Brass, Positive Lock 250

