

1717567-5 ✓ ACTIVE

AMP Signal Double Lock

TE Internal #: 1717567-5


PCB Latches, Locks & Retainers, Double Lock Plate, 5 Position, 1 Row, -22 – 221 °F [-30 – 105 °C], AMP Signal Double Lock

[View on TE.com >](#)



[Connectors >](#) [PCB Connectors >](#) [PCB Connector Accessories >](#) [PCB Connector Hardware >](#) [PCB Latches, Locks & Retainers >](#)

Signal Double Lock TPA

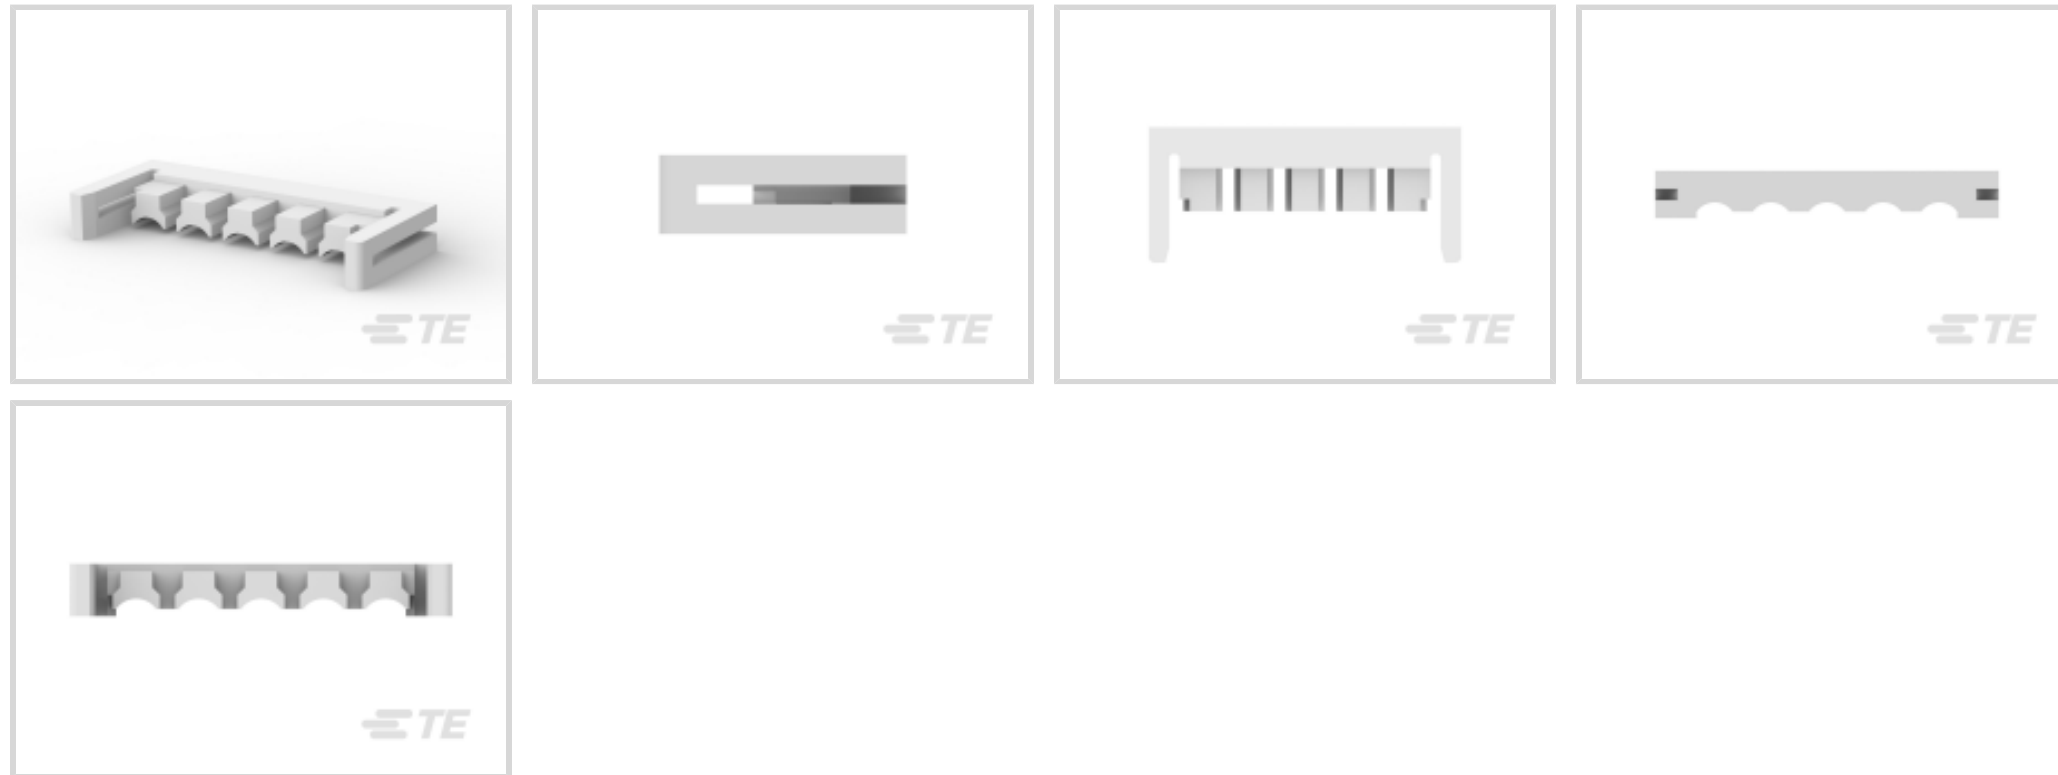

Connector & Contact Retention Accessory Type: **Double Lock Plate**

Number of Positions: **5**

Number of Rows: **1**

Operating Temperature Range: **-30 – 105 °C [-22 – 221 °F]**

[All Signal Double Lock TPA \(14\)](#)

Features

Product Type Features

Connector & Contact Retention Accessory Type	Double Lock Plate
--	-------------------

Configuration Features

Number of Positions	5
Number of Rows	1

Body Features

Primary Product Material	PBT GF
Primary Product Color	Natural

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability











Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | [AMP Signal Double Lock](#)

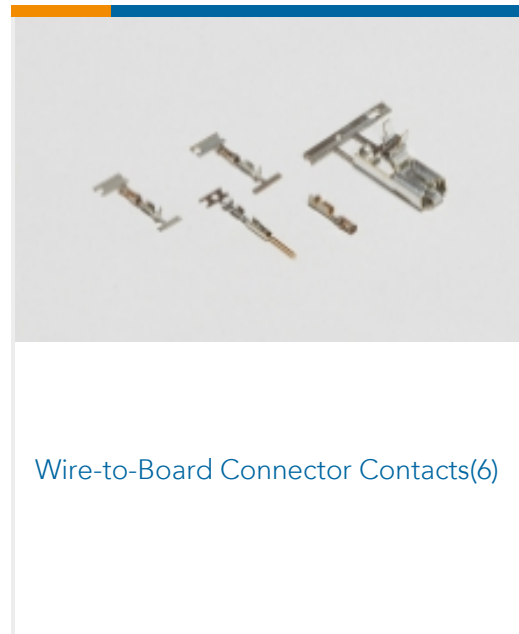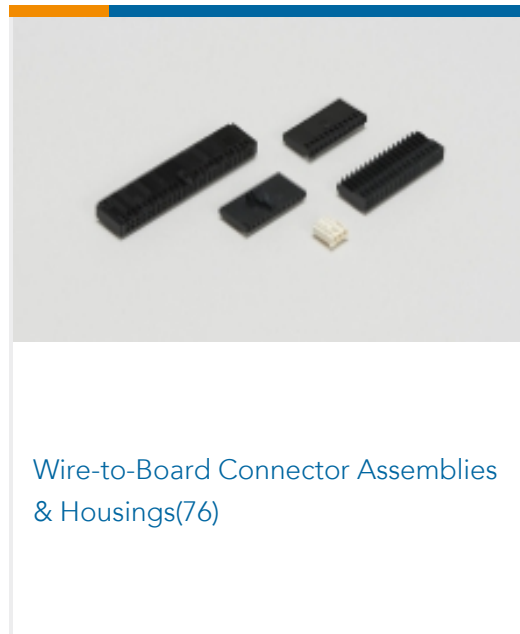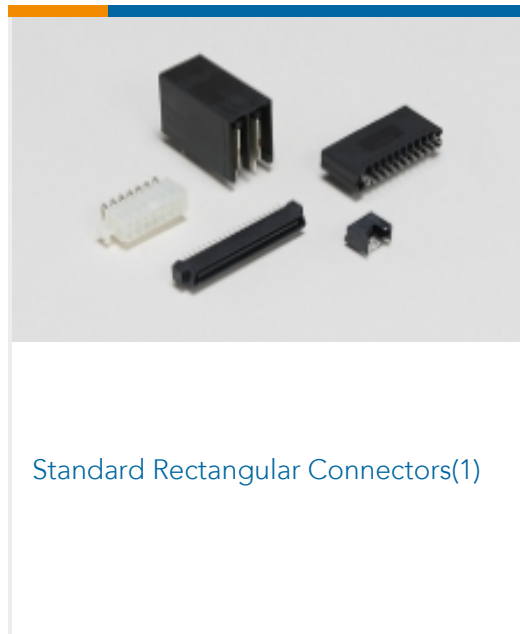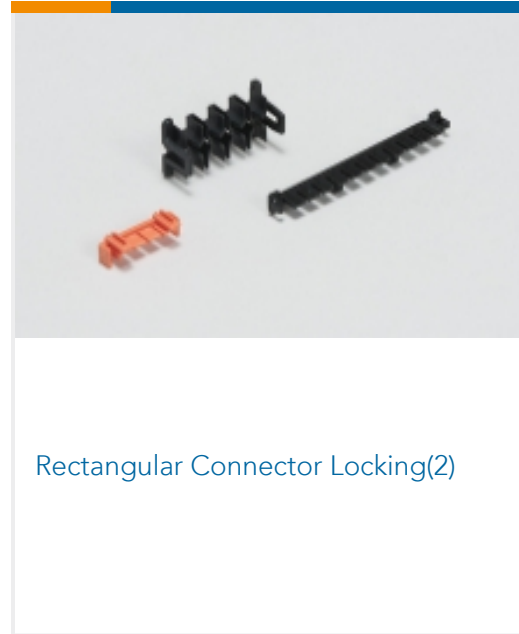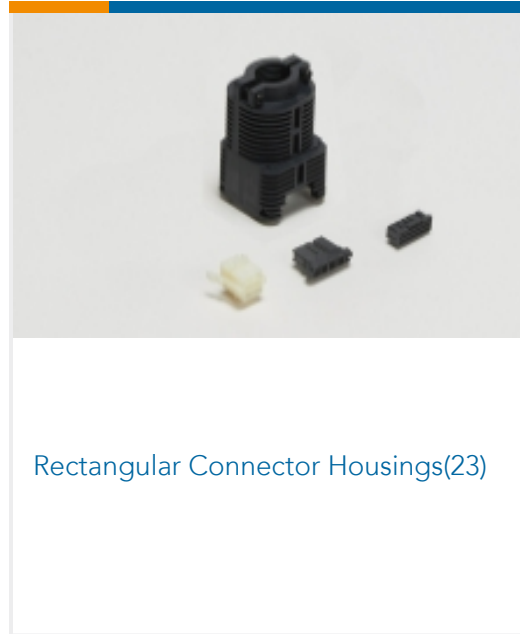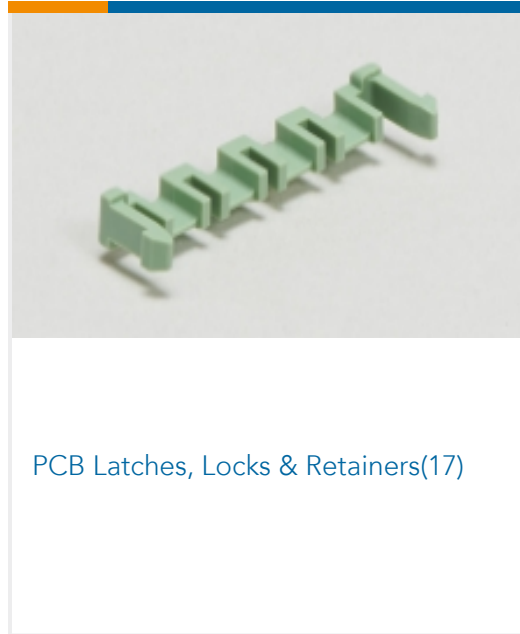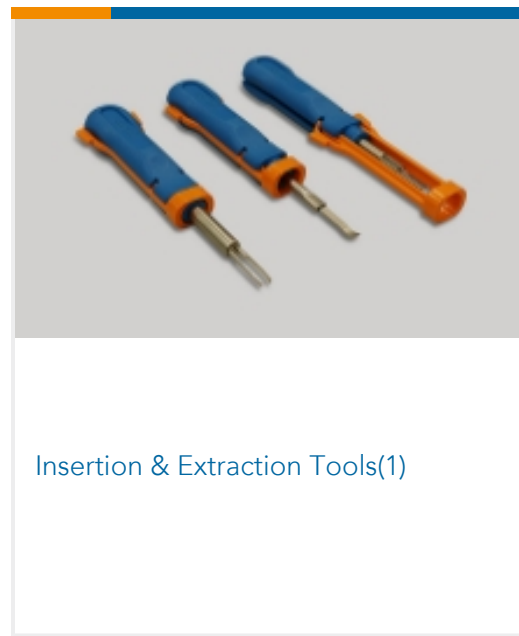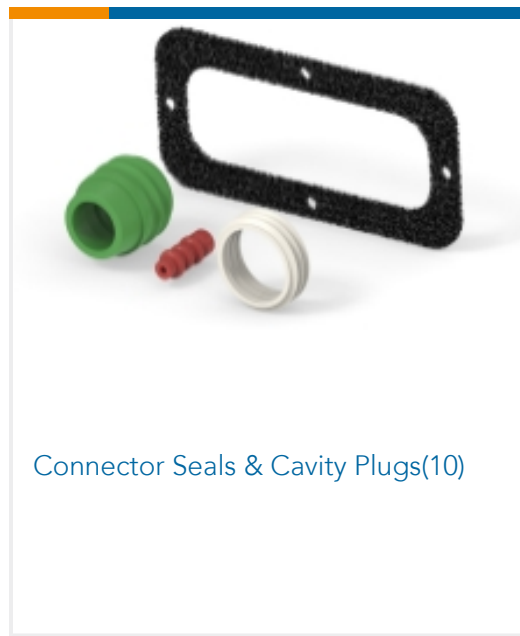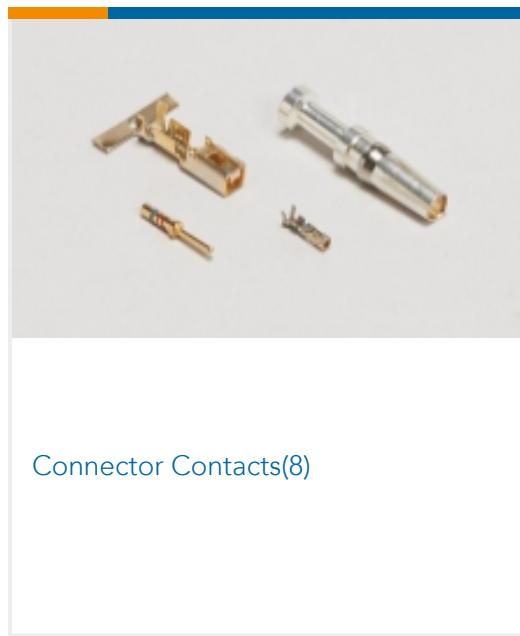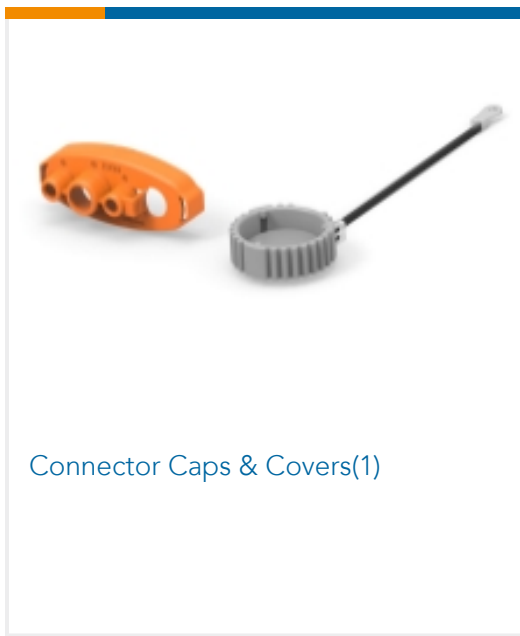

Customers Also Bought





Documents

Product Drawings

[DBL LOCK PLATE FOR SMC PLUG 5P](#)

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1717567-5_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1717567-5_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1717567-5_D.3d_stp.zip](#)

English

3D PDF

English

Customer View Model

[ENG_CVM_1717567-5_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1717567-5_C.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1717567-5_C.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_1717567-5_102520182319_dmtec](#)

English

1717567-5

PCB Latches, Locks & Retainers, Double Lock Plate, 5 Position, 1 Row, -22 – 221 °F
[-30 – 105 °C], AMP Signal Double Lock



[MD_1717567-5_102520182319_dmtec](#)

English