
# 172142-7 - ACTIVE

TE Internal #: 172142-7 Housing, Receptacle, Wire-to-Board, 7 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal

#### View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

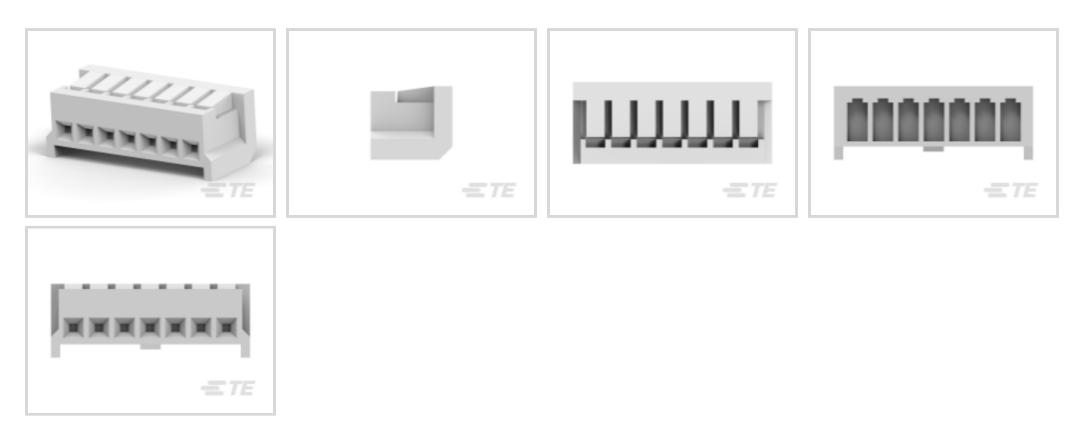

Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Board Number of Positions: 7

Centerline (Pitch): 2.5 mm [.098 in]

## Features

### Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	7
Number of Rows	1
Electrical Characteristics	
Insulation Resistance	500 ΜΩ
Operating Voltage	250 VAC
Body Features	
Connector Profile	Low
Primary Product Color	Natural

Housing, Receptacle, Wire-to-Board, 7 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



### **Contact Features**

Contact TypeSocketContact Current Rating (Max)2 ATermination FeaturesTermination Method to Wire & CableCrimpMechanical AttachmentStrain ReliefWithoutPanel Mount FeatureWithoutPCB Mount RetentionWithoutMating Retention TypeLockMating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing Entry ConfigurationBoth Ends ClosedHousing MaterialNylon 6/6Centerline (Pitch)2.5 mml 098 inl	Contact Layout	Inline
Termination Features   Termination Method to Wire & Cable Crimp   Mechanical Attachment   Strain Relief Without   Panel Mount Feature Without   PCB Mount Retention Without   Mating Retention Type Lock   Connector Mounting Type Cable Mount (Free-Hanging)   Housing Entry Configuration Both Ends Closed   Housing Material Nylon 6/6	Contact Type	Socket
Termination Method to Wire & CableCrimpKechanical AttachmentStrain ReliefWithoutPanel Mount FeatureWithoutPCB Mount RetentionWithoutMating Retention TypeLockMating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing Entry ConfigurationBoth Ends ClosedHousing MaterialNylon 6/6	Contact Current Rating (Max)	2 A
Mechanical Attachment   Strain Relief Without   Panel Mount Feature Without   PCB Mount Retention Without   Mating Retention Type Lock   Mating Retention Without   Connector Mounting Type Cable Mount (Free-Hanging)   Housing Entry Configuration Both Ends Closed   Housing Material Nylon 6/6	Termination Features	
Strain ReliefWithoutPanel Mount FeatureWithoutPCB Mount RetentionWithoutMating Retention TypeLockMating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing Entry ConfigurationHousing MaterialMount (Step Seatures)	Termination Method to Wire & Cable	Crimp
Panel Mount FeatureWithoutPCB Mount RetentionWithoutMating Retention TypeLockMating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing FeaturesHousing Entry ConfigurationBoth Ends ClosedHousing MaterialNylon 6/6	Mechanical Attachment	
PCB Mount RetentionWithoutMating Retention TypeLockMating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing FeaturesHousing Entry ConfigurationBoth Ends ClosedHousing MaterialNylon 6/6	Strain Relief	Without
Mating Retention TypeLockMating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing FeaturesMating Entry ConfigurationBoth Ends ClosedHousing MaterialNylon 6/6	Panel Mount Feature	Without
Mating RetentionWithConnector Mounting TypeCable Mount (Free-Hanging)Housing FeaturesSoft Ends ClosedHousing MaterialBoth Ends ClosedHousing MaterialNylon 6/6	PCB Mount Retention	Without
Connector Mounting Type Cable Mount (Free-Hanging)   Housing Features Both Ends Closed   Housing Material Nylon 6/6	Mating Retention Type	Lock
Housing Features   Housing Entry Configuration Both Ends Closed   Housing Material Nylon 6/6	Mating Retention	With
Housing Entry ConfigurationBoth Ends ClosedHousing MaterialNylon 6/6	Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Material Nylon 6/6	Housing Features	
	Housing Entry Configuration	Both Ends Closed
Centerline (Pitch) 2.5 mm[ 098 in]	Housing Material	Nylon 6/6
	Centerline (Pitch)	2.5 mm[.098 in]

### Dimensions

Connector Length	19.5 mm
Connector Height	6.7 mm
Usage Conditions	
Operating Temperature Range	-20 – 95 °C[-4 – 203 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	UL
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1000
Packaging Method	Bag

# **Product Compliance**

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 7 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Melamine (3% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



Housing, Receptacle, Wire-to-Board, 7 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal





# Customers Also Bought



TE Part #170020-2



TE Part #172142-6

### Documents

### **CAD** Files

### 3D PDF

3D

**Customer View Model** 

#### ENG\_CVM\_CVM\_172142-7\_F.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_172142-7\_F.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_172142-7\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

### Datasheets & Catalog Pages

1-1773972-5\_EIS\_Connectors\_Brochure

English

Housing, Receptacle, Wire-to-Board, 7 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



Product Specifications

Application Specification

English

Crimping of Low Profile "El" Series Connector

English

Agency Approvals Agency Approval Document

English