

TE Internal #: 1734510-1 USB Connectors, B, 2.0, Mini Profile, Receptacle, 1 Port, Top, Right Angle, Tray, Flush, Through Hole - Solder, Cable-to-Board, 5000, 5 Position

View on TE.com >

Connectors > Audio & Video Connectors > USB Connectors



USB Adapter Type: **B**

USB Version: 2.0

Connector Profile: Mini

Connector & Housing Type: Receptacle

Number of Ports: 1

Features

Product Type Features



Integral Locking Latch	Without
USB Adapter Type	В
USB Version	2.0
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
USB Connector Type	Mini USB 2.0 Type-B
Configuration Features	
Number of Ports	1
Number of Positions	5
Body Features	
Offset	0 mm
Shell Plating Finish	Matte
Shell Plating Material	Tin over Nickel

USB Connectors, B, 2.0, Mini Profile, Receptacle, 1 Port, Top, Right Angle, Tray, Flush, Through Hole - Solder, Cable-to-Board, 5000, 5 Position



Connector Profile	Mini
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Current Rating (Max)	1 A
Termination Features	
Termination Post & Tail Length	2.85 mm[.113 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Locking Feature	With
PCB Mount Location	Тор
PCB Connector Seating	Flush
PCB Mount Retention Type	Straight Leg
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	PBT
Housing Color	Black
Body Orientation	Right Angle
Centerline (Pitch)	.8 mm[.031 in]
Dimensions	
PCB Thickness (Recommended)	1.6 mm[.063 in]
Usage Conditions	
Soldering Temperature (Max)	240 °C[464 °F]
Mating Cycles (Max)	5000
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Halogen Free	No
Circuit Application	Power & Signal
Industry Standards	
Test Identification (TID)	60001201
Moisture Sensitivity Level	1
Industry Standard	USB 2.0

C For support call+1 800 522 6752

USB Connectors, B, 2.0, Mini Profile, Receptacle, 1 Port, Top, Right Angle, Tray, Flush, Through Hole - Solder, Cable-to-Board, 5000, 5 Position



UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	95
Packaging Method	Tray
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



USB Connectors, B, 2.0, Mini Profile, Receptacle, 1 Port, Top, Right Angle, Tray, Flush, Through Hole - Solder, Cable-to-Board, 5000, 5 Position



Customers Also Bought

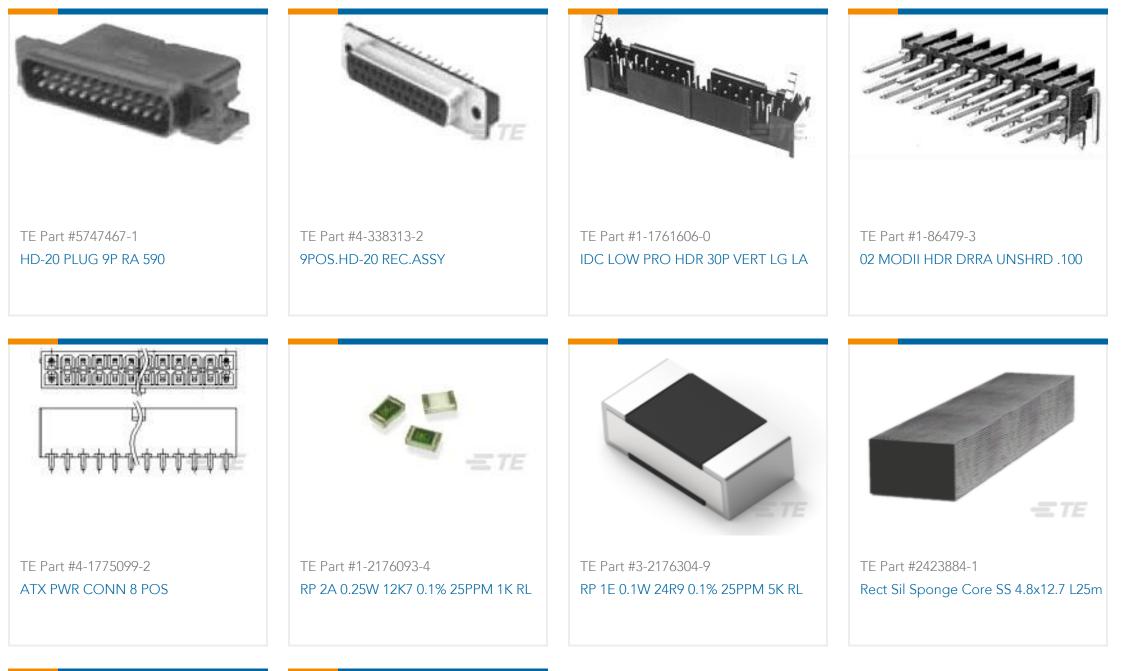



MOD-2 PIN HDR.2X03P

TRI-STATE DIP 8P G RAISED T&R

Documents

Product Drawings MINI USB, TYPE B, R/A, T/H

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1734510-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1734510-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1734510-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

C For support call+1 800 522 6752

USB Connectors, B, 2.0, Mini Profile, Receptacle, 1 Port, Top, Right Angle, Tray, Flush, Through Hole - Solder, Cable-to-Board, 5000, 5 Position



Product Specifications Product Specification

English

Product Environmental Compliance Product Compliance Document English

Product Compliance Document

English