

#### Free Height

TE Internal #: 1735481-1 PCB Mount Receptacle, Vertical, Board-to-Board, 40 Position, .8 mm [.031 in] Centerline, Gold, Surface Mount, Signal, Natural, Free Height

#### View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > Free Height Receptacle Conn: Board-Board, Vertical, 40, 0.8mm



PCB Connector Assembly Type: PCB Mount Receptacle

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: **40** 

Centerline (Pitch): .8 mm [ .031 in ]

All Free Height Receptacle Conn: Board-Board, Vertical, 40, 0.8mm (23)

### Features

### Product Type Features

PCB Connector Assembly Type

Connector System

PCB Mount Receptacle

Board-to-Board

Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	40
Board-to-Board Configuration	Parallel
Electrical Characteristics	
Electrical Characteristics Dielectric Withstanding Voltage (Max)	500 VAC
	500 VAC 2 MΩ
Dielectric Withstanding Voltage (Max)	
Dielectric Withstanding Voltage (Max) Insulation Resistance	2 ΜΩ
Dielectric Withstanding Voltage (Max) Insulation Resistance Operating Voltage	2 ΜΩ

PCB Mount Receptacle, Vertical, Board-to-Board, 40 Position, .8 mm [.031 in] Centerline, Gold, Surface Mount, Signal, Natural, Free Height



### **Contact Features**

PCB Contact Termination Area Plating Material Thickness	2 μm[78.74 μin]
Contact Layout	Inline
Mating Tab Width	.8 mm[.031 in]
Mating Tab Thickness	.25 mm[.01 in]
PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
	8 µin
Contact Type	Socket
Contact Current Rating (Max)	.5 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.3 mm[.012 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	

Mounting Alignment Feature Length	.5 mm[.02 in]
PCB Mount Alignment Type	Positioning Bosses
Mating Alignment	With
Mating Alignment Type	Polarized
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Housing Features	
Mating Entry Location	Тор
Centerline (Pitch)	.8 mm[.031 in]
Housing Material	Matte
Dimensions	
Connector Height	17 mm[.669 in]
Stack Height	17 mm, 18 mm, 19 mm, 20 mm[.669 in][.709 in][.748 in][.787 in]

**C** For support call+1 800 522 6752

PCB Mount Receptacle, Vertical, Board-to-Board, 40 Position, .8 mm [.031 in] Centerline, Gold, Surface Mount, Signal, Natural, Free Height



Housing Temperature Rating	High
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Assembly Process Feature	Pick and Place Cover
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
	.5 in
Packaging Quantity	22
Packaging Type	Box, Tube

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

PCB Mount Receptacle, Vertical, Board-to-Board, 40 Position, .8 mm [.031 in] Centerline, Gold, Surface Mount, Signal, Natural, Free Height



# **Compatible Parts**







TE Part # 5179029-1 0.8FH,P06H.5,040,08/Sn,TU


# Also in the Series | Free Height



PCB Headers & Receptacles(759)

# Customers Also Bought



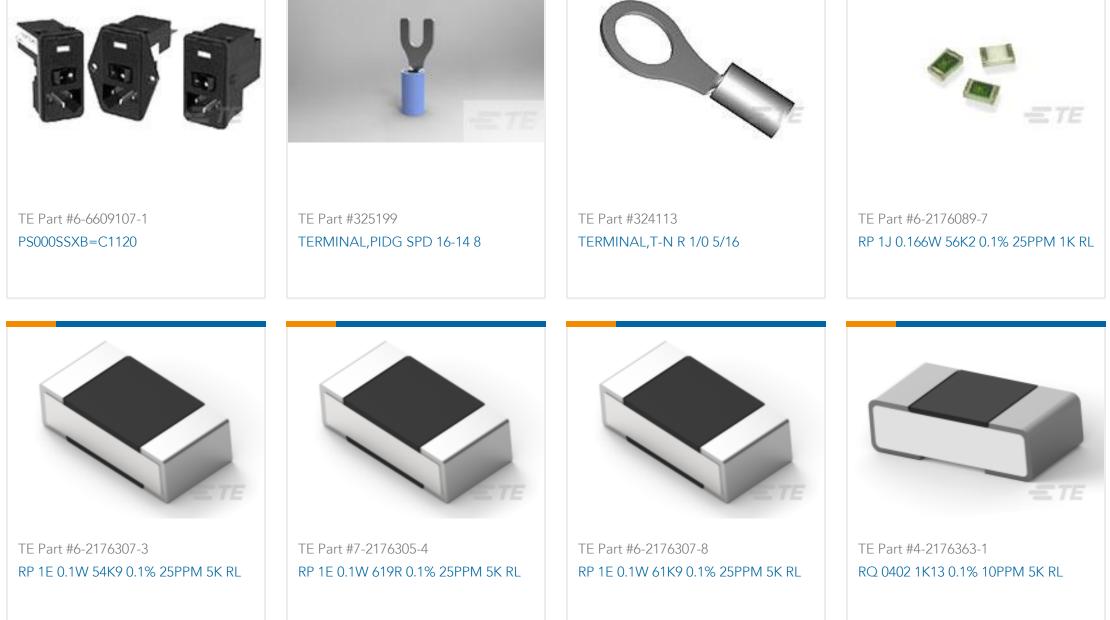





PCB Mount Receptacle, Vertical, Board-to-Board, 40 Position, .8 mm [.031 in] Centerline, Gold, Surface Mount, Signal, Natural, Free Height





# Documents

# Product Drawings 0.8FH,R17H.5,040,08/Sn,TU,SC

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_1735481-1\_A.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1735481-1\_A.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_1735481-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

Product Specification

English