

173691-1 ✓ ACTIVE

[Positive Lock](#) | [Positive Lock 187](#)


TE Internal #: 173691-1

Quick Disconnects, Receptacle, 20 – 16 AWG Wire Size, .51 – 1.31 mm<sup>2</sup> Wire Size, Mating Tab Width 4.75 mm [.187 in], Straight, Brass, Positive Lock 187

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

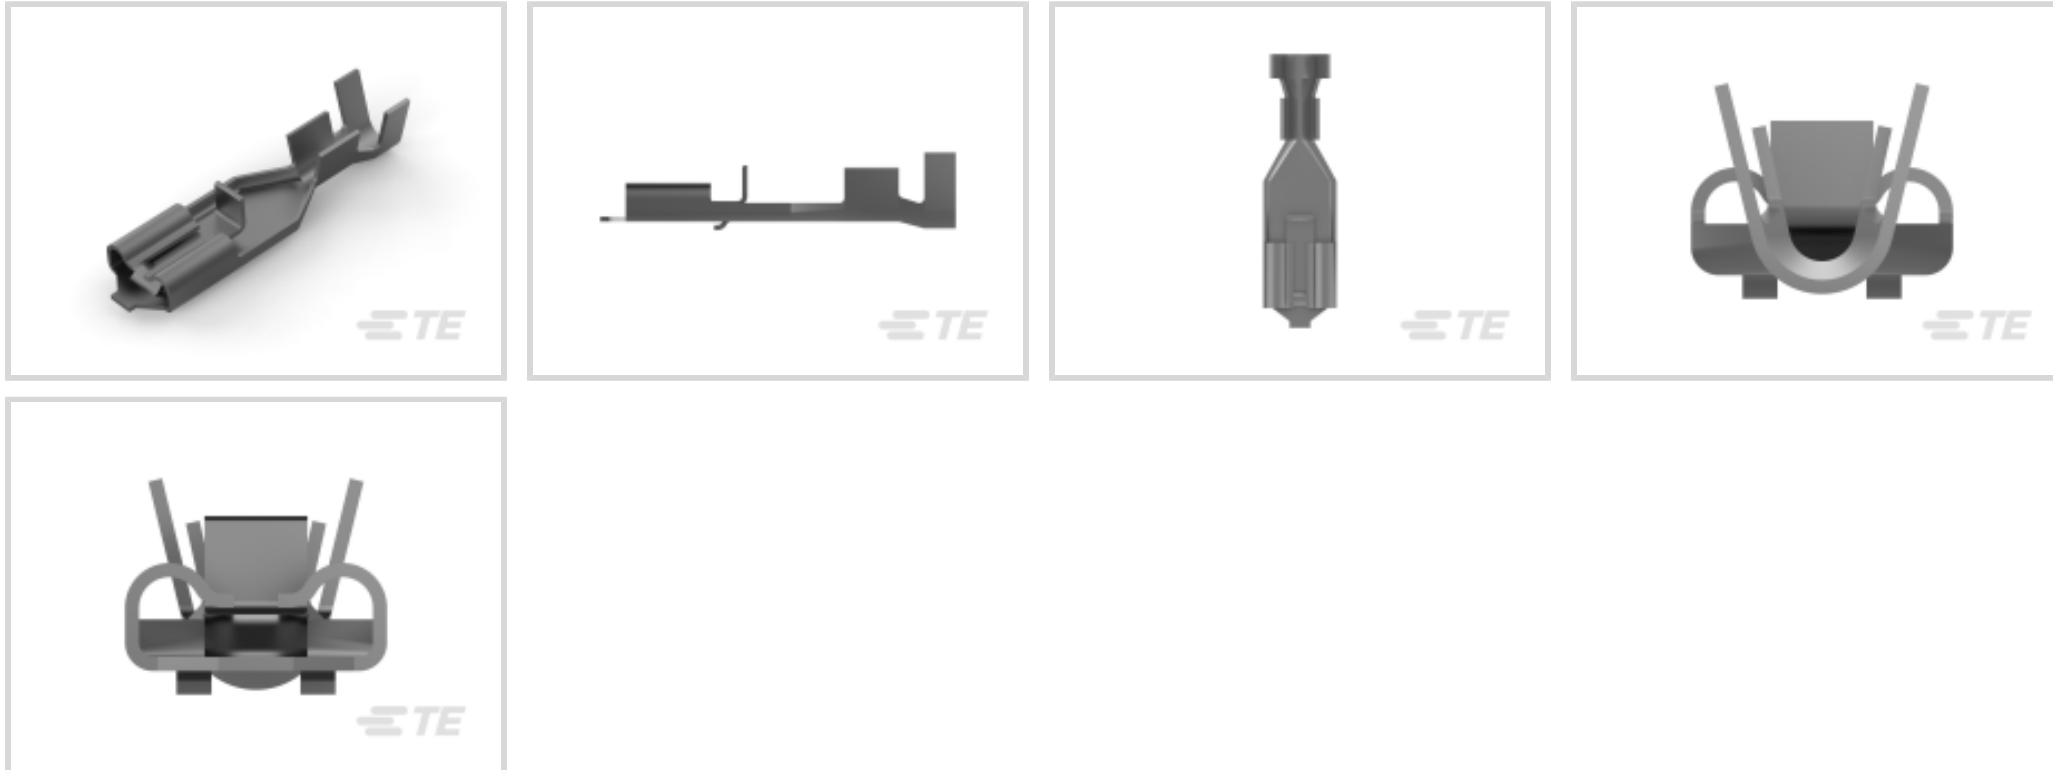

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .51 – 1.31 mm<sup>2</sup>

Mating Tab Width: 4.75 mm [.187 in]

Mating Tab Thickness: .81 mm [.032 in]

## Features

### Product Type Features

Insertion Force	Low
-----------------	-----

### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm [.187 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------



### Mechanical Attachment

Extraction Force	7 – 100 Newton
Wire Insulation Support	With
Mating Retention Type	Dimple

### Dimensions

Terminal Material Thickness	.3 mm[.012 in]
Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	1.9 – 3.4 mm[.075 – .134 in]
Wire Size	.51 – 1.31 mm <sup>2</sup>

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

### Industry Standards

Agency/Standard	UL
-----------------	----

### Packaging Features

Packaging Quantity	6000
Packaging Method	Strip/Reel

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2150032-2  
OCEAN\_2.0\_APPLICATOR-E-090F155F



TE Part # 284106-2  
5P.MODULAR CONN.MICRO RELAY W.



TE Part # 1969870-1  
3P, 250 AND 187 SRS, POSI-LOCK MARK II



TE Part # 7-2150032-2  
OCEAN\_2.0\_APPLICATOR-E-090F155F




**KIT**  
REPRESENTATION ONLY

TE Part # 7-2150032-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-090F155F




TE Part # 2-2150032-2  
OCEAN\_2.0\_APPLICATOR-E-090F155F

## Also in the Series | Positive Lock 187

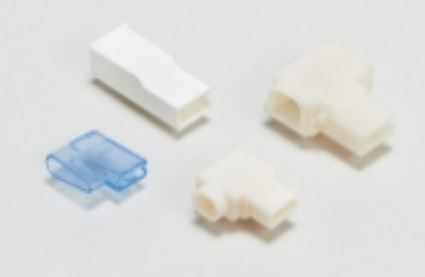


Crimp Terminal Housings(86)



Insertion & Extraction Tools(2)



Insulation Boots & Sleeves(7)




Quick Disconnects(57)

## Customers Also Bought



TE Part #3-1415055-1  
SR4D4024

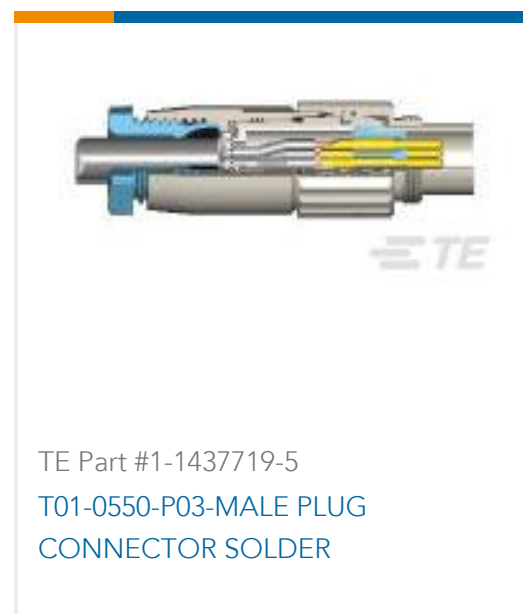

TE Part #1-1437719-5  
T01-0550-P03-MALE PLUG  
CONNECTOR SOLDER



TE Part #341001-6  
PL 250 REC TERMINAL 13-11 PTPB LP



TE Part #170725-2  
SOLIS RING



TE Part #31679  
TERMINAL,DG R 26-22 4



TE Part #4-2176245-8  
CRGS1206 5% 8K2



TE Part #1534415-5  
DUOPL POW FEM CON5P



TE Part #3-282002-5  
AMP MONO-SHAPE TAB CONN 2P.



TE Part #4-282003-1  
MONO-SHAPE TAB CONN 3P. ASSY



TE Part #CON SMA001-SMD-G  
SMA Jack 50 Ohm PCB Surface Mount

## Documents

### Product Drawings

[PL 187 REC 20-16 AWG 0.3 X 14.0 PTBR](#)

Japanese

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_173691-1\\_B.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_173691-1\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_173691-1\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications



**Application Specification**

English

**ER\*\*Sertissage du Contact Positive Lock Mark II Serie 4,75 Ref. 173691**

English

**Application Specification**

English

---

**Product Environmental Compliance**

**Product Compliance Document**

English

**Product Compliance Document**

English