1740419-1 ACTIVE

MAG-MATE

TE Internal #: 1740419-1

Magnet Wire Terminals, Pin, .72 mm Magnet Wire, 21 AWG Magnet Wire, Insulation Displacement (IDC), Barbs Mating

Retention Type, MAG-MATE

View on TE.com >



Terminals & Splices > Magnet Wire Terminals











Magnet Wire Terminal Type: Pin

Mating Pin Diameter: 3.18 mm [.125 in]

Stock Thickness (Magnet Wire Side)

Magnet Wire Size: .72 mm

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Features

Product Type Features

Troduct Type reatures	
Compatible With Discrete Wire Type	Magnet Wire, Solid
Contact Features	
Magnet Wire Terminal Type	Pin
Mating Pin Diameter	3.18 mm[.125 in]
Terminal Plating Material	Unplated
Terminal Orientation	Left Hand
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Mating Retention Type	Barbs
Dimensions	
Terminal Height	7.6 mm[.299 in]
Magnet Wire Size	.72 mm

.32 mm[.013 in]



Product Length	19 mm[.748 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Packaging Features	
Packaging Quantity	5000
Packaging Method	Reel, Reel/Carton
Other	
Terminals & Splices Comment	Two magnet wires may be terminated in the same terminal slot if diameters are equal.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



























Also in the Series | MAG-MATE

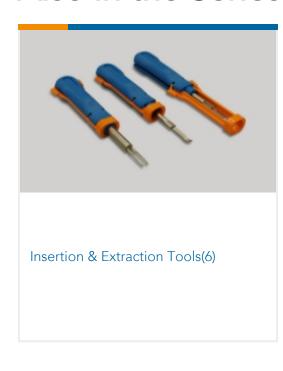



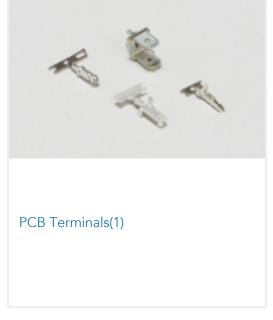

Customers Also Bought





Documents

Product Drawings

MAG-MATE PIN CONTACT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1740419-1_C_c-1740419-1-c.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1740419-1_C_c-1740419-1-c.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1740419-1_C_c-1740419-1-c.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Magnet Wire Terminals & Splices

English

Product Specifications

Application Specification

English

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

MAG-MATE CAVITY .300 SPECIAL DESIGN

Magnet Wire Terminals, Pin, .72 mm Magnet Wire, 21 AWG Magnet Wire, Insulation Displacement (IDC), Barbs Mating Retention Type, MAG-MATE



English

Instruction Sheet (non U.S.)

English