# 174352-2 ACTIVE

### AMP | Econoseal, Econoseal J - 070 Mark II

TE Internal #: 174352-2

Housing for Female Terminals, Wire-to-Wire, 2 Position, .189 in [4.8]


mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-

Hanging), Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > ECONOSEAL, CONNECTOR HOUSING

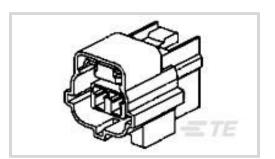

Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4.8 mm [ .189 in ]

Sealable: Yes

#### All ECONOSEAL, CONNECTOR HOUSING (108)

### **Features**

### **Product Type Features**

| Mixed & Hybrid Connector     | No                           |
|------------------------------|------------------------------|
| Connector Shape              | Rectangular                  |
| Connector System             | Wire-to-Wire                 |
| Connector & Housing Type     | Housing for Female Terminals |
| Sealable                     | Yes                          |
| Primary Locking Feature      | Integrated in Housing        |
| Configuration Features       |                              |
| Number of Positions          | 2                            |
| Number of Rows               | 1                            |
| Electrical Characteristics   |                              |
| Operating Voltage            | 12 VDC                       |
| Nominal Voltage Architecture | 12 V                         |
| Body Features                |                              |
| Cable Exit Angle             | 180°                         |

Black

Primary Product Color

**Contact Features** 



|                                      | 4.0                                                                                                        |
|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| Contact Size                         | 1.8mm                                                                                                      |
| Contact Type                         | Receptacle                                                                                                 |
| Mating Tab Width                     | 1.8 mm[.071 in]                                                                                            |
| Mechanical Attachment                |                                                                                                            |
| Terminal Position Assurance          | Yes                                                                                                        |
| Strain Relief                        | Without                                                                                                    |
| Mating Alignment Type                | Polarization Slot                                                                                          |
| Mating Alignment                     | With                                                                                                       |
| Connector Mounting Type              | Cable Mount (Free-Hanging)                                                                                 |
| Housing Features                     |                                                                                                            |
| Housing Material                     | PBT                                                                                                        |
| Centerline (Pitch)                   | 4.8 mm[.189 in]                                                                                            |
| Dimensions                           |                                                                                                            |
| Connector Height                     | 22.8 mm[.898 in]                                                                                           |
| Product Width                        | 20.6 mm[.811 in]                                                                                           |
| Product Length                       | 27.6 mm[1.087 in]                                                                                          |
| Usage Conditions                     |                                                                                                            |
| Operating Temperature (Max)          | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F] |
| Operating Temperature Range          | -30 - 105 °C[-22 - 221 °F]                                                                                 |
| Operation/Application                |                                                                                                            |
| Circuit Application                  | Signal                                                                                                     |
| Industry Standards                   |                                                                                                            |
| UL Flammability Rating               | UL 94V-2                                                                                                   |
| Packaging Features                   |                                                                                                            |
| Packaging Quantity                   | 100                                                                                                        |
| Packaging Method                     | Bag                                                                                                        |
| Other                                |                                                                                                            |
| Serviceable                          | Yes                                                                                                        |
| Connector Position Assurance Capable | No                                                                                                         |



### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                 |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                            |
| Solder Process Capability                     | Not applicable for solder process capability                                                                              |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**





















TE Part # 172746-1 E-J MK-2 070 RUBBER PLUG



### Also in the Series | Econoseal



Automotive Connector Caps & Covers (1)



Automotive Connector Locks & Position Assurance(25)



Automotive Housings(105)



Automotive Terminals(48)



Connector Seals & Cavity Plugs(19)




Insertion & Extraction Tools(7)



Other Automotive Connector Accessories(5)



PCB Headers & Receptacles(4)

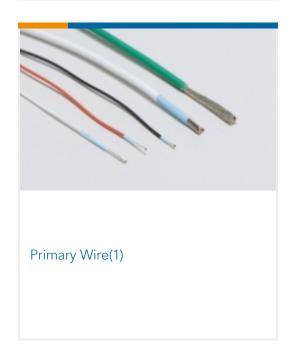

Also in the Series | Econoseal J - 070 Mark II






Automotive Connector Locks & Position Assurance(8)



Automotive Housings(6)



Connector Seals & Cavity Plugs(1)

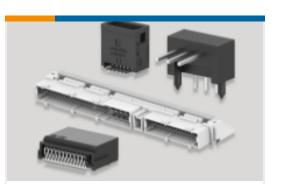

PCB Headers & Receptacles(1)


## Customers Also Bought



TE Part #174359-2 ECONOSEAL, CONNECTOR HOUSING



TE Part #7-967570-4 2POS MQS TAB SEALED COD A

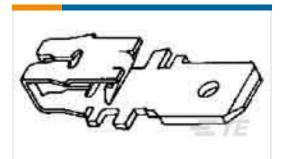

TE Part #1217243-1
TAB, 187 FASTON, MAG-MATE



TE Part #1418850-3 MCON 1.2 CB REC SWS AG











### **Documents**

Product Drawings
070 ECONOSEAL MARK-2 PLUG 2P

Japanese

### **CAD Files**

Customer View Model ENG\_CVM\_CVM\_174352-2\_F.2d\_dxf.zip

English

3D PDF



3D

**Customer View Model** 

ENG\_CVM\_CVM\_174352-2\_F.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_174352-2\_F.3d\_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

**Econoseal Connector Series** 

English

### **Product Specifications**

Crimping of AMP-ECONOSEAL "J"-II, .070 and .250 Series Contact

English

**Application Specification** 

English

#### **Instruction Sheets**

ECONOSEAL J MARK II+ CONNECTOR (EJ-MK II+)

English

Customer Manual (non U.S.)

English

**ECONOSEAL J MARK II+ CONNECTOR** 

English

Customer Manual (non U.S.)

English

### Agency Approvals

Agency Approval Document

English